


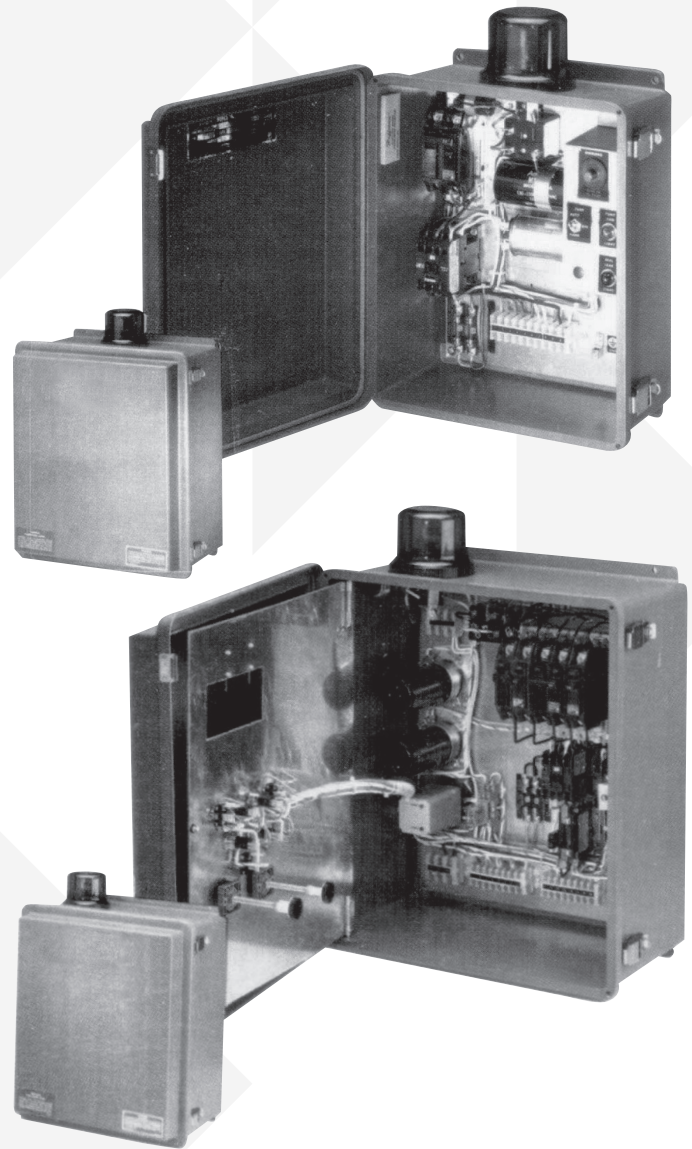

MYERS[®]
MODELS CGL, CG, CGNC,
CWHV3, CWHV4 AND CNC
**SINGLE AND THREE-PHASE SIMPLEX
AND DUPLEX CONTROL PANELS**

MYERS®

Quality Electrical Components Assure Reliable, Automatic Pump Operation

- IEC horsepower-rated motor contactors/starters rated at over 1 million cycles.
- Designed for use with standard mercury float switches. Uses three for simplex (off-on-alarm), four for duplex (off-on-override-alarm).
- Solid state alternating relay to equalize pump wear (duplex only).
- Override relay to start second pump if first one fails for any reason (duplex panels only).

Corrosion-Resistant for Long Life

- Outdoor NEMA 3R enclosures of galvanized steel with gray enamel finish and steel back panels (except CGL).
- Weathertight NEMA 4X fiberglass enclosures with aluminum back panels (CGL only).

Meets NEC and UL (508) Standards for Safety

- UL-approved panel designs (label installed only on request).
- Individual pump circuit breakers.
- Control circuit transformer with primary fusing.
- Separate control and alarm circuit fuses.

Panel Dimensions and Optional Features

- Elapsed Time Meter
- Alarm Bell or Horn
- Alarm Bell or Horn with Silence Switch
- Auxiliary Alarm Contacts
- Condensation Heater
- Convenience Outlet
- Intrinsically Safe Relays
- Lightning Arrestor
- Full Inner Door (CGL only)
- Cycle Counter
- 115 or 24 Volt Control Circuit Transformer
- Transfer Switch/Generator Receptacle
- Lag Pump Delay Circuitry (duplex only)
- Low Level Cut-Off and Alarm
- Low Voltage Circuitry

Other options available.
Consult factory for applications.


NOTE: Some options may increase enclosure size.

Single-Phase Enclosure Dimensions

Panel	CGL Simplex 1 ph.	CG, CNC, CWHV Simplex 1 ph.	CGL Duplex 1 ph.	CG, CNC, CWHV Duplex 1 ph.
Material	Fiberglass	Fiberglass	Fiberglass	Fiberglass
A	15-1/2	17-1/2	19-5/8	19-5/8
B	13-3/8	15-7/16	17-1/2	17-1/2
C	7-3/4	7-11/16	10-5/8	10-5/8
D	14-5/8	16-3/4	18-7/8	18-7/8
E	10	12	12	12
F	5/16	5/16	5/16	5/16





Three-Phase Enclosure Dimensions

Panel	CGL Simplex	CGL Duplex	1 - 15 HP Simplex		1 - 15 HP Duplex		20 - 60 HP Simplex		20 - 60 HP Duplex	
			208/230V	460V	208/230V	460V	20-25 HP	30-60 HP	20-25 HP	30-60 HP
Material	Fiberglass	Fiberglass	Steel		Steel		Steel		Steel	
A	17-1/2	19-5/8	22	26	32		26	32	38	36
B	15-7/16	17-1/2	20		24		20	24	24	36
C	7-11/16	10-5/8	8-3/8		8-3/8		8-3/8		8-3/8	12-3/8
D	16-3/4	18-7/8	21	25	31		25	31	31	37
E	12	12	13		17		13	17	17	27
F	5/16	5/16	3/8 x 1/2		3/8 x 1/2		3/8 x 1/2		3/8 x 1/2	
G	--	--	20	24	30		24	30	30	36

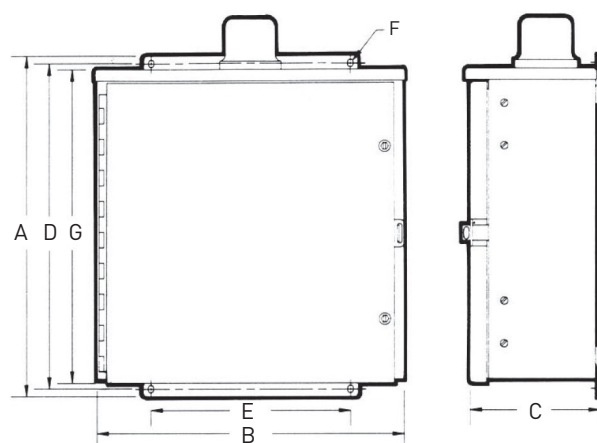





Standard Panel Features for CGL

- A.** Corrosion-Resistant Enclosure
NEMA 4X fiberglass (outdoor).
- B.** Aluminum Back Panel
- C.** IEC Motor Starter/Contactors
- D.** Pump Circuit Breaker(s)
- E.** Control Circuit Fuse
1 Amp.
- F.** Alarm Circuit Fuse
1 Amp.
- G.** Hand-Off-Auto Switch
Momentary in-hand.
- H.** Pump Run Light
Amber.
- I.** Seal Leak Light
Red (only on units with detector).
- J.** Terminal Blocks
- K.** Ground Lug
- L.** Flashing Alarm Light
Mounted on top of enclosure (red).
- M.** Solid State Flasher
- N.** Override Relay
In event of first pump failure (duplex only).
- O.** Alternator Relay
Solid state (duplex only).
- P.** Control Circuit Transformer
(Three-phase only).
- Q.** Start Winding Relay(s)
(Single-phase only).
- R.** Starting Capacitor(s)
(Single-phase only).
- S.** Running Capacitor(s)
(Single-phase only).
- T.** Klixon® Overload
(Single-phase only).

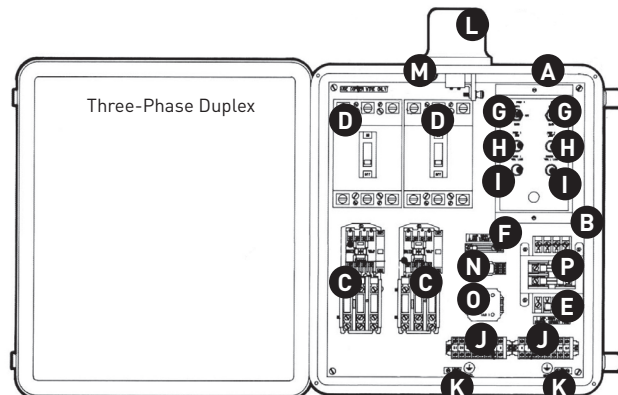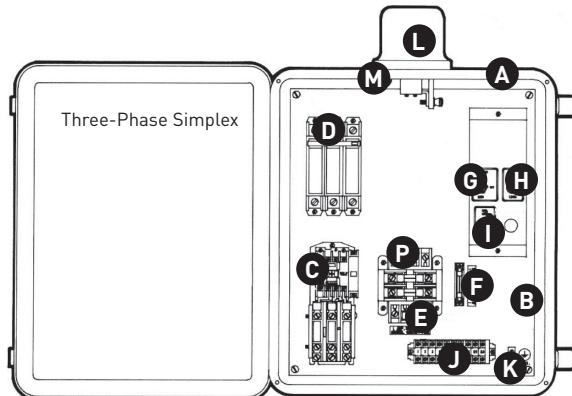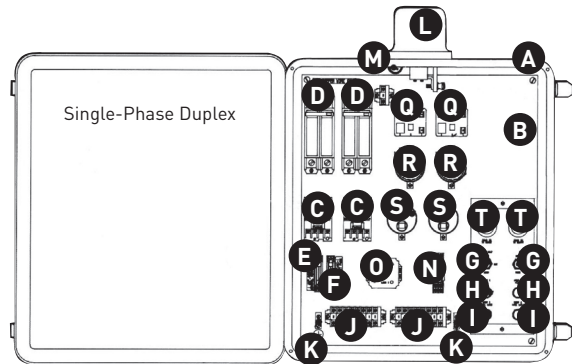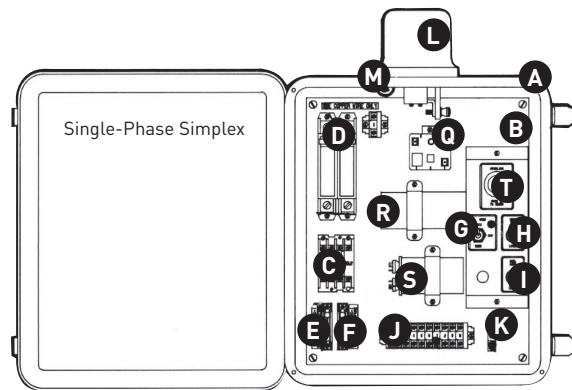

Standard Panel Features for CG, CGNC, CNC, CWHV3 and CWHV4

- A.** Corrosion-Resistant Enclosure
- B.** Back Panel
- C.** IEC Motor Starter
3-Pole bi-metal overload relay (three-phase only),
1-Pole bi-metal overload relay (single-phase only – not on CWHV3).
- D.** Pump Circuit Breaker(s)
Lock-out tab(s).
- E.** Control Circuit Fuse
- F.** Alarm Circuit Fuse
- G.** Control Circuit Breaker
- H.** Control Circuit Transformer
(Three-phase only).
- I.** Hand-Off-Auto Switch
Momentary in-hand position.
- J.** Alarm Test Switch
- K.** Pump Run Light(s)
Amber.
- L.** Seal Leak Light(s)
Red (except CWHV3).
- M.** Terminal Blocks
- N.** Ground Lugs
- O.** Flashing Alarm Light
Mounted on top of enclosure (red).
- P.** Full Inner Door
- Q.** Solid State Flasher
- R.** Overload Reset Button
(Not on CWHV3 single-phase).
- S.** Override Relay
In event of first pump failure (duplex only).
- T.** Alternator Relay
Solid state (duplex only).
- U.** Incoming Power Terminal Blocks
(Single-phase only).
- V.** Start Winding Relay(s)
(Single-phase only).
- W.** Starting Capacitor(s)
(Single-phase only).
- X.** Running Capacitor(s)
(Single-phase only).
- Y.** IEC Motor Contactor(s)
(Single-phase CWHV3 only).

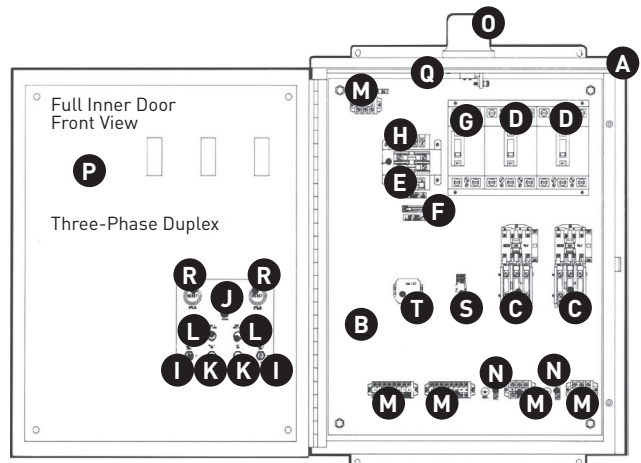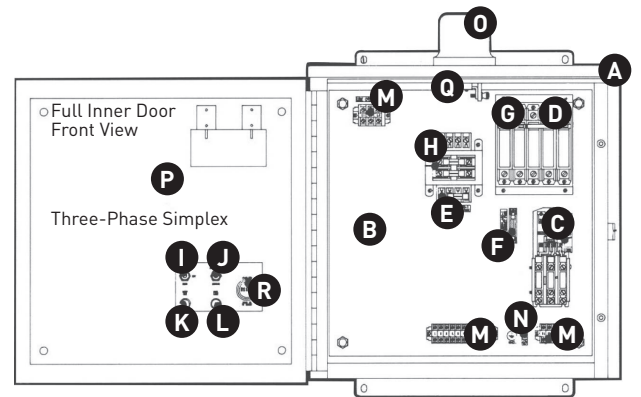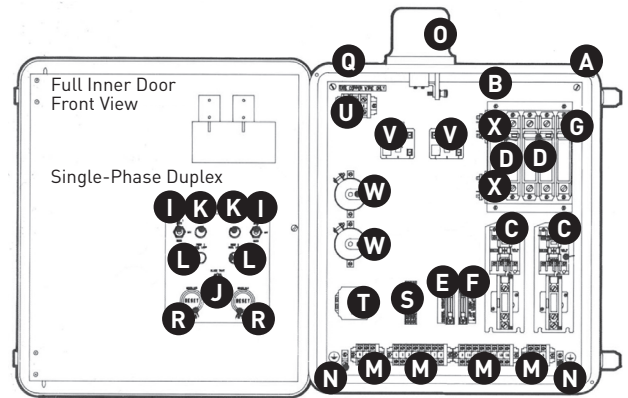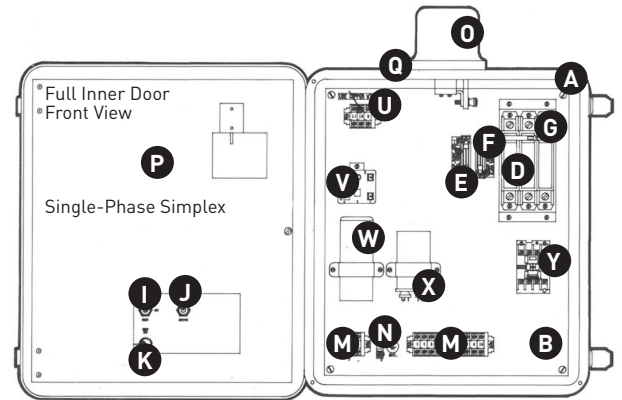

740 EAST 9TH STREET,
ASHLAND, OHIO 44805
WWW.FEMYERS.COM

269 TRILLIUM DRIVE, KITCHENER,
ONTARIO, CANADA N2G 4W5
WWW.FEMYERS.COM

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.
K3215 09/18/14 © 2014 Pentair Ltd. All Rights Reserved.