MARINE PRODUCT DATA SHEET OEM: 357-103-00 (1100 GPH) AFTERMARKET: 357-103-10 (1100 GPH)

APPLICATION

12V DC Bait/Livewell tanks water circulation

<u>PUMP</u>

Type:	Cei
Outlet Port:	1-1
Inlet Port:	3/4
Washdown Port:	1/2
Liquid:	130
Prime:	Flo
Inlet PSI:	30
Run Dry:	No

Centrifugal Pump 1-1/8" Barb 3/4" NPT-M 1/2" MPT-F 130 F [54 C] Max Flooded Inlet 30 PSI [2.1 Bar] Max No

ELECTRICAL

Motor:	12VDC Permanent Magnet,
	Continuous Duty
Protection:	Need External Fuse (Not supplied)
Leads:	6 ft [1.8M] Tinned, 16 AWG
Fuse:	6 Amp Recommended
Control:	No Control

MATERIALS

Housing:High Strength NylonImpeller:High Strength NylonHardware:Stainless Steel

APPROVALS

Ignition Protected 8846, CE

<u>SHIPPING</u>


Approx. Net Weight: Approx. Lbs./Ctn. Pumps in Carton: Approx. Carton Size: 1.4 Lbs. [0.63 Kg] each 33 Lbs. [15 Kg] 24 24"L x 18"W x 11" H [61cm x 46 cm x 28 cm]


RELATED DOCUMENTS

MS-030-140
MS-020-005
911-611
911-1045



Everything you are looking for in a livewell pump. Our tough, high density nylon housing and heavy duty water cooled motor give the SHURflo Livewell Pumps unparalleled reliability. Patented anti-airlock feature allows the pump to clear trapped air in rough water or when the boat is anchored. The dual port fitting allows for easy washdown pump connections. All Piranha Series Livewell Pumps have a removable cartridge for easy cleaning.



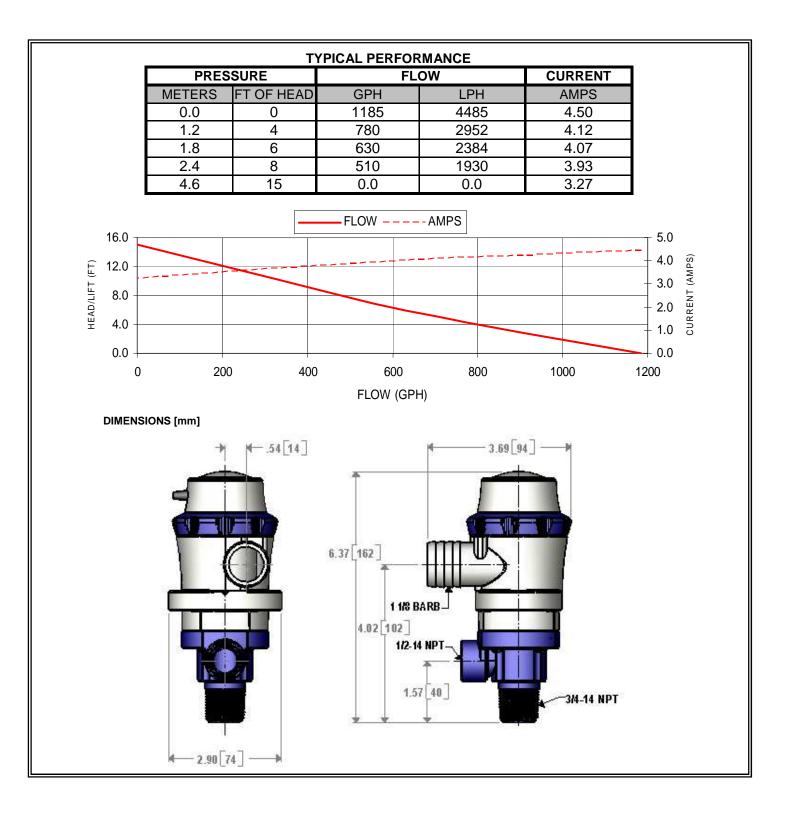



WATER PURIFICATION

3545 Harbor Gateway South, Suite 103, Costa Mesa, CA 92626, (800) 854-3218 www.SHURFLO.com

All Pentair trademarks and logos are owned by Pentair, Inc. All other brand or product names are trademarks or registered marks of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.