



# EVERPURE® CC1E CARTRIDGES

HIGH FLOW, HIGH CAPACITY CARBON FILTER FOR CHLORINE AND CHLORAMINE REDUCTION

CC1E Cartridges: EV9105-02



## APPLICATIONS

High flow, high volume foodservice applications requiring chloramine reduction.

## FEATURES • BENEFITS

CC1E extended service cartridge contains radial flow granular activated carbon (GAC)

Improves the taste and consistency of beverages and ice by reducing chloramine, chlorine and other off-tastes and odors

## INSTALLATION TIPS

Choose a mounting location suitable to support the full weight of the system when operating [30 lbs. (13.6 kg)]

Install on cold water lines only

Do not install where unit is exposed to direct sunlight

## OPERATION TIPS

Change cartridge on a regular six (6) month preventative maintenance program

Change cartridges when capacity is reached (15,000 gallons) or when flow becomes too slow

Change cartridge when the difference between the inlet pressure and the system outlet gauge is greater than or equal to 20 psi (1.4 bar)

Service flow rate must not exceed 5.0 gpm (19 Lpm)

Always flush the filter cartridge to drain for fifteen minutes at time of installation and cartridge change


## SIZING

Service Flow Rate: Maximum 5 gpm (19 Lpm)

Capacity: 15,000 gallons (56,775 L)

# EVERPURE® CC1E CARTRIDGES

## EV9105-02

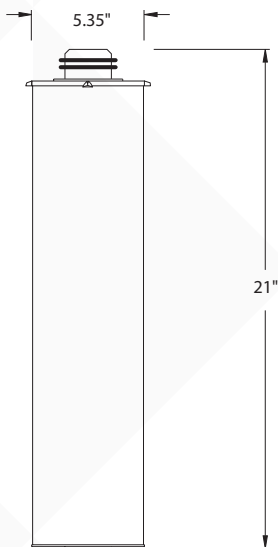

### SPECIFICATIONS

#### Overall Dimensions

21" L x 5.35" dia. (53.3 x 13.5 cm)

#### Capacity

15,000 gallons (56,775 L)

#### Service Flow Rate

Maximum 5 gpm (19 Lpm)

#### Pressure Requirements

20 - 100 psi (1.4 - 6.9 bar), non-shock

#### Temperature

35 - 100°F (2 - 38°C)

#### Shipping Weight

4 lbs. (10.1 kg)

#### Electrical Connection

None required

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

### WARRANTY

Everpure water treatment systems by Pentair® (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Pentair will provide a copy of the warranty upon request.



#### FILTRATION & PROCESSING SOLUTIONS

EVERPURE-SHURFLO WORLD HEADQUARTERS, 1040 MUIRFIELD DRIVE, HANOVER PARK, IL 60133 USA • WWW.EVERPURE.COM  
800.942.1153 MAIN (US ONLY) • 630.307.3000 MAIN • 630.307.3030 FAX • CSEVERPURE@PENTAIR.COM EMAIL

EVERPURE-SHURFLO AUSTRALIA / NEW ZEALAND, 1-21 MONASH DRIVE, DANDENONG SOUTH, VIC, 3175, AUSTRALIA  
1300.576.190 TEL • AU.EVERPURE@PENTAIR.COM EMAIL

EVERPURE-SHURFLO CHINA, 21F CLOUD 9 PLAZA, NO 1118, SHANGHAI, 200052, CHINA  
86.21.3211.4588 TEL • 86.21.3211.4580 FAX • CHINA.WATER@PENTAIR.COM EMAIL

EVERPURE-SHURFLO INDIA, GREEN BOULEVARD, B-9/A, 7TH FLOOR - TOWER B SECTOR 62, NOIDA - 201301  
91.120.419.9444 TEL • 91.120.419.9400 FAX • INDIACUSTOMER@PENTAIR.COM EMAIL

EVERPURE-SHURFLO EUROPE, PENTAIR WATER BELGIUM BVBA, INDUSTRIEPARK WOLFSTEE, TOEKOMSTLAAN, 30 B-2200 HERENTALS, BELGIUM  
+32.(0).14.283.500 TEL • +32.(0).14.283.505 FAX • SALES@EVERPURE-EUROPE.COM EMAIL

EVERPURE-SHURFLO JAPAN INC., HASHIMOTO MN BLDG. 7F, 3-25-1 HASHIMOTO, MIDORI-KU, SAGAMIHARA-SHI KANAGAWA 252-0143, JAPAN  
81.(0)42.775.3011 TEL • 81.(0)42.775.3015 FAX • INFO@EVERPURE.CO.JP EMAIL

EVERPURE-SHURFLO SOUTHEAST ASIA, 390 HAVELOCK ROAD, #04-01, KING'S CENTRE, SINGAPORE 169662  
65.6795.2213 TEL • FAX: 65.6795.2219 FAX • CSEVERPURE@PENTAIR.COM EMAIL

All Pentair trademarks and logos are owned by Pentair, Inc. All other brand or product names are trademarks or registered marks of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.