

Performance Curves for the 360 Series (50 Hz)

MODEL/SIZE	R.P.M.	PDF PAGE
6x8x15	1475	2
6x8x15	960	3
8x10x15A	1475	4
8x10x15A	980	5

6x8x15 - 1475 RPM

ENCLOSED IMPELLER




Pentair Pump Group

SIZE: 6X8X15 TYPE: 360 IMPELLER: ENCLOSED R.P.M.: 1475

MAX. SPHERES 41 mm
 IMP. PATT. NO. 444A272
 CASE PATT. NO. 180A337

MIN. IMP. DIA. 305 mm

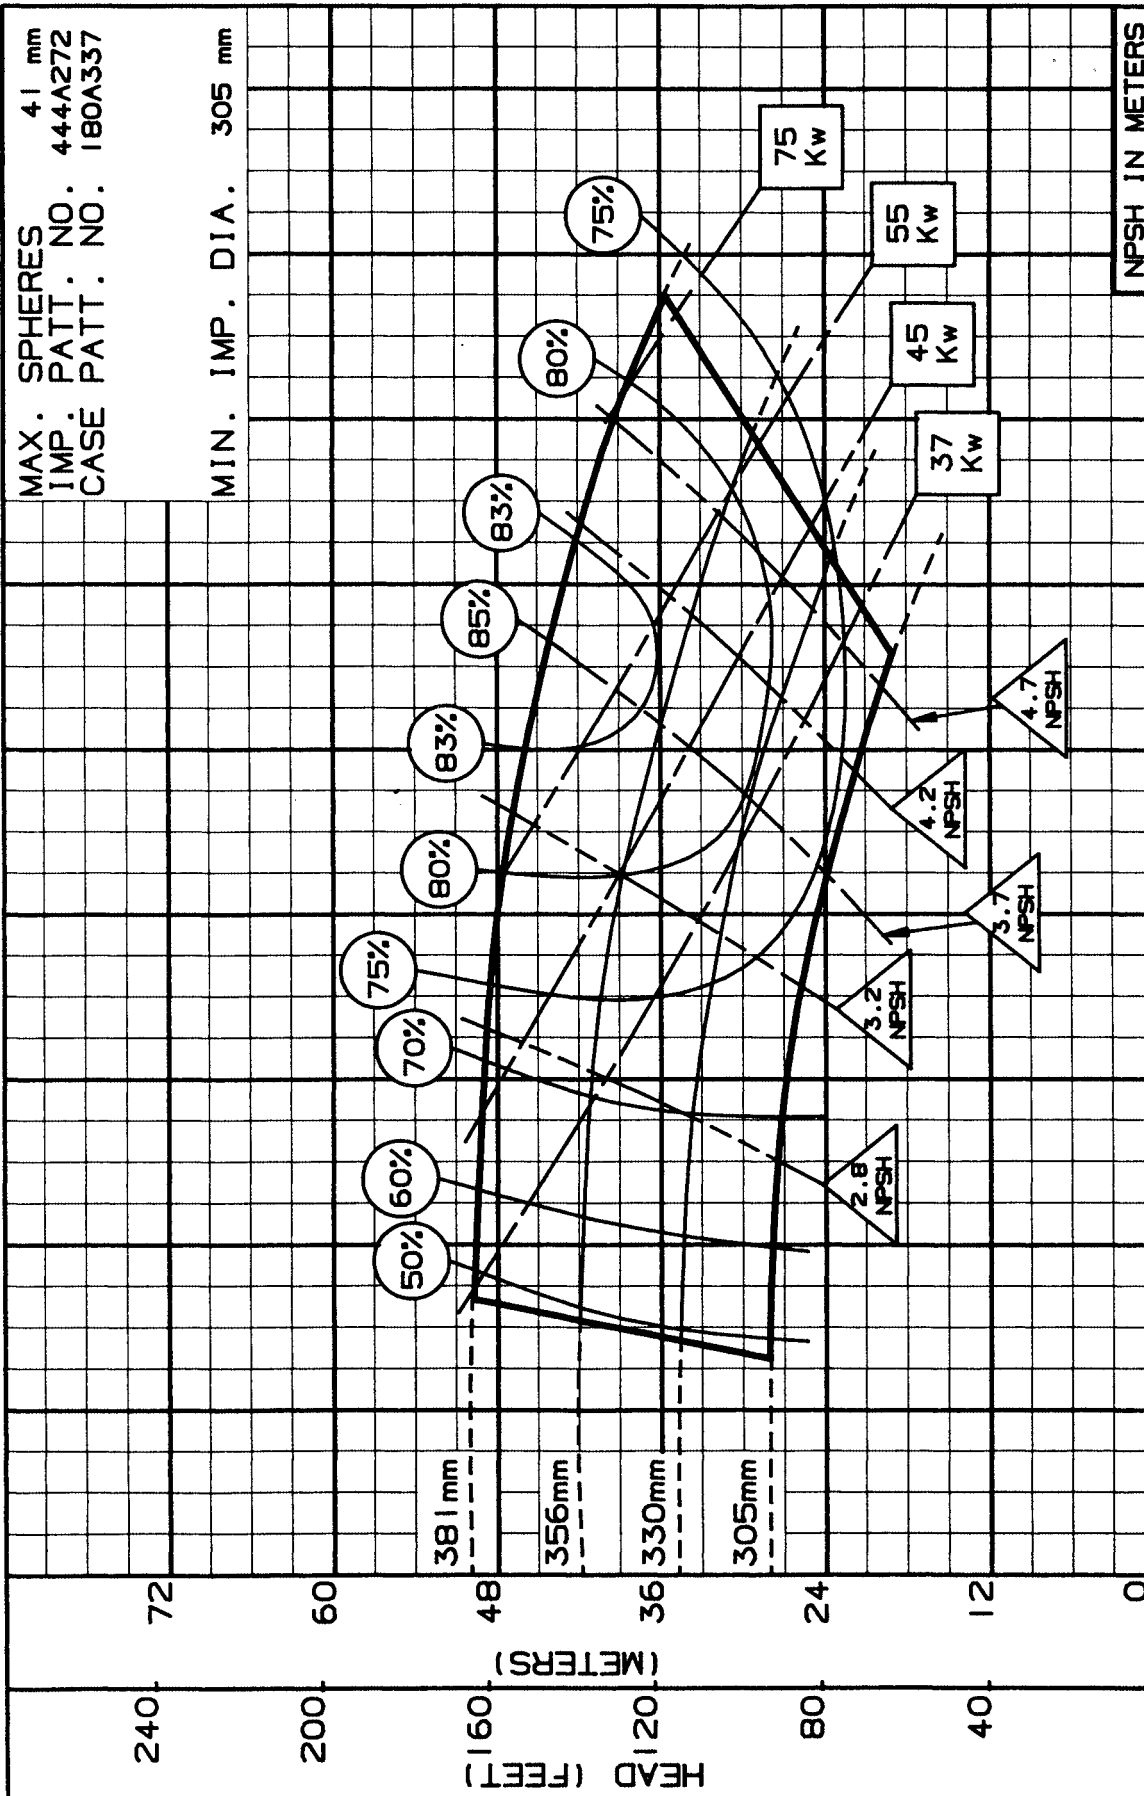


M ³ /HR	0	80	160	240	320	400	480	560	640	720
L/S		25	50	75	100	125	150	175		
U.S. GPM	400	800	1200	1600	2000	2400	2800			
NPSH IN METERS										

DRAWN BY: *ATL* APPROVED BY: DL DATE: 7-90 PC-142655M

SIZE: 6X8X15 TYPE: 360 IMPELLER: ENCLOSED R.P.M.: 960

MAX. SPHERES 41 mm
IMP. PATT: NO. 444A272
CASE PATT: NO. 180A337

MIN. IMP. DIA. 305 mm

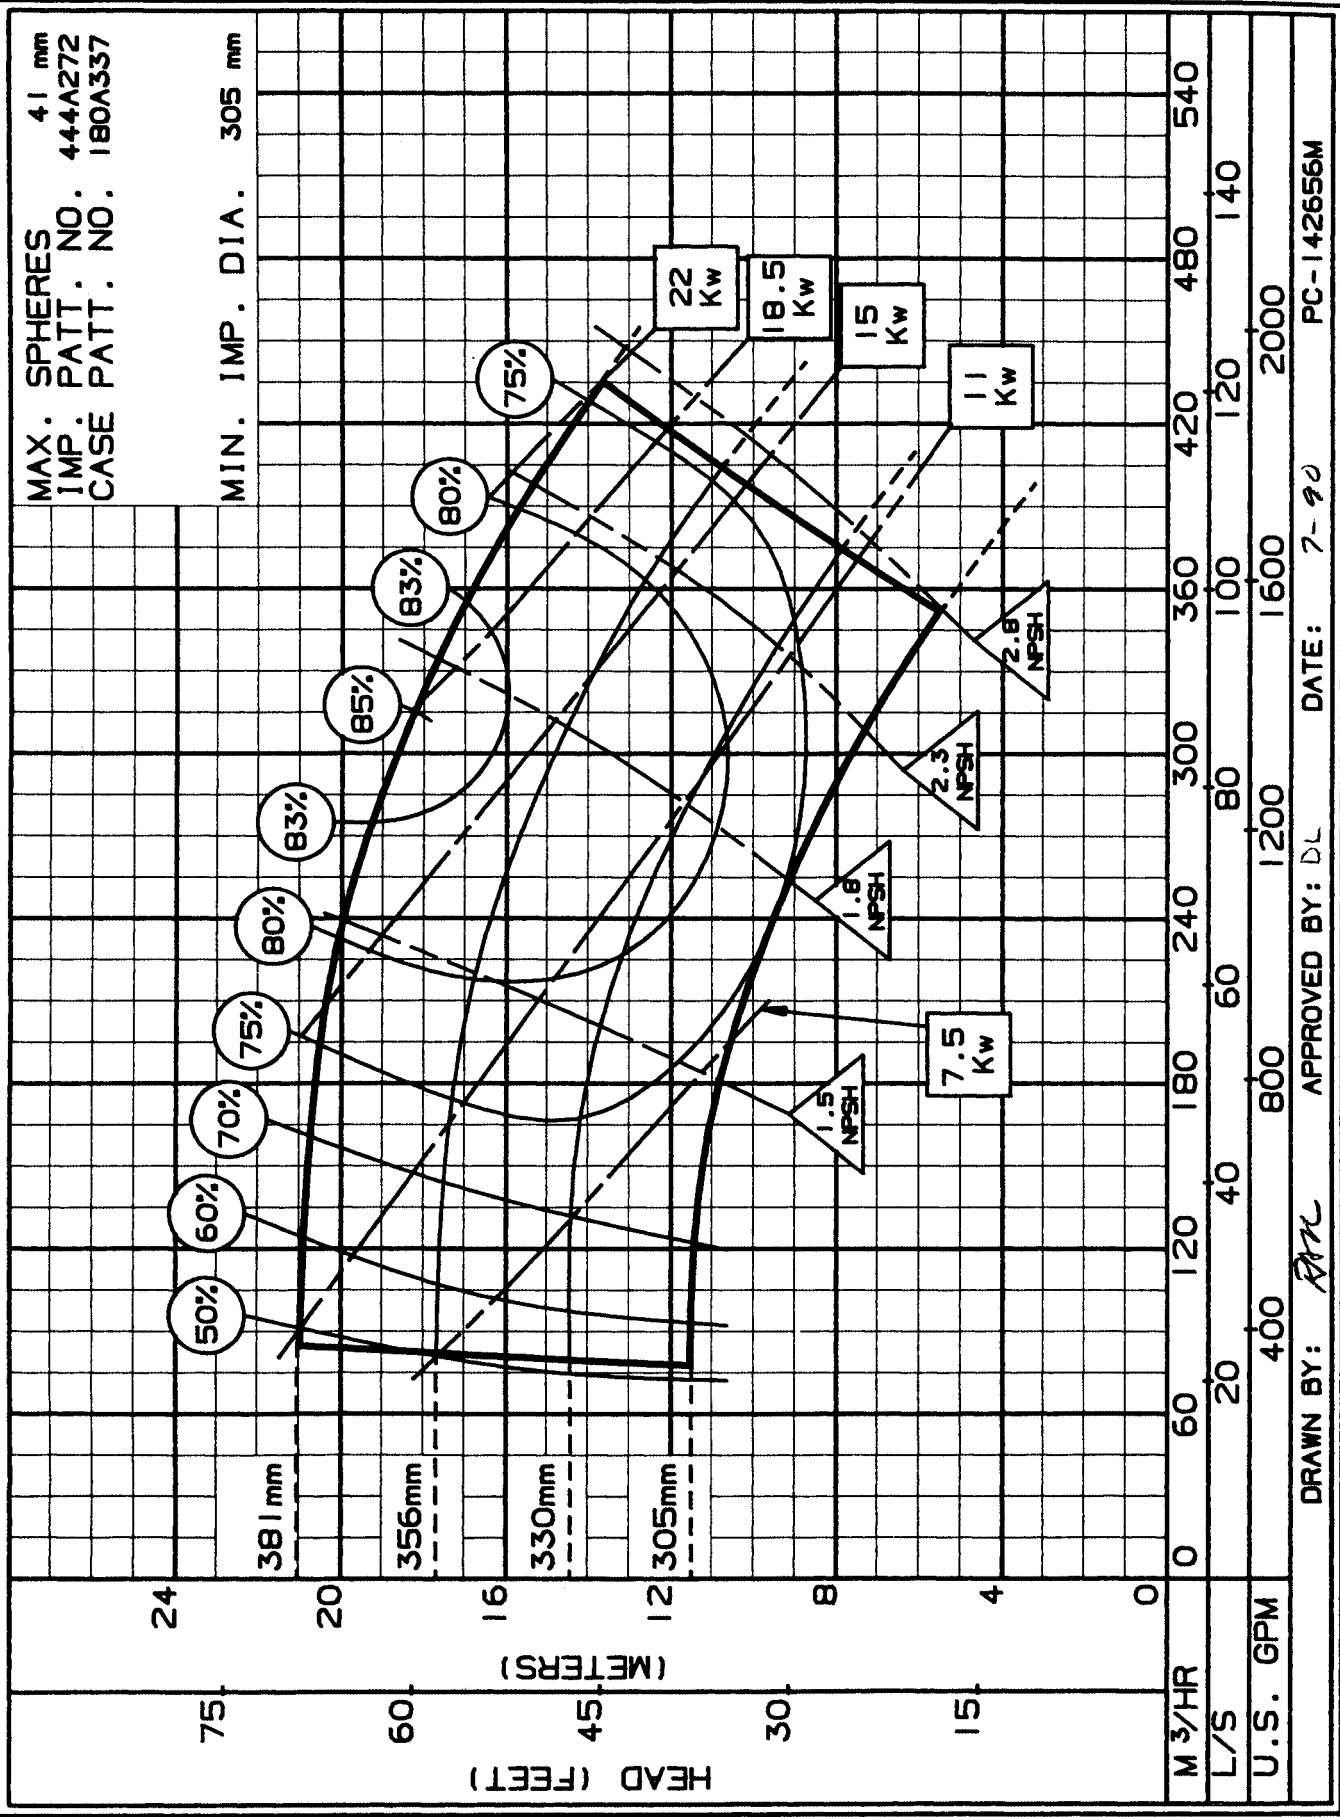

DRAWN BY: *ATC* APPROVED BY: DL DATE: 7-90 PC-142656M

SECTION 360 (Metric 50Hz)

DATE JULY 1994

SUPERCEDES MARCH 1986

8x10x15A - 1475 RPM

ENCLOSED IMPELLER


ap AURORA®

Pentair Pump Group

SIZE: 8X10X15A TYPE: 360 IMPELLER: ENCLOSED R.P.M.: 1475

MAX. SPHERES 41 mm
IMP. PATT. NO. 444A294
CASE PATT. NO. 180A338

MIN. IMP. DIA. 305 mm

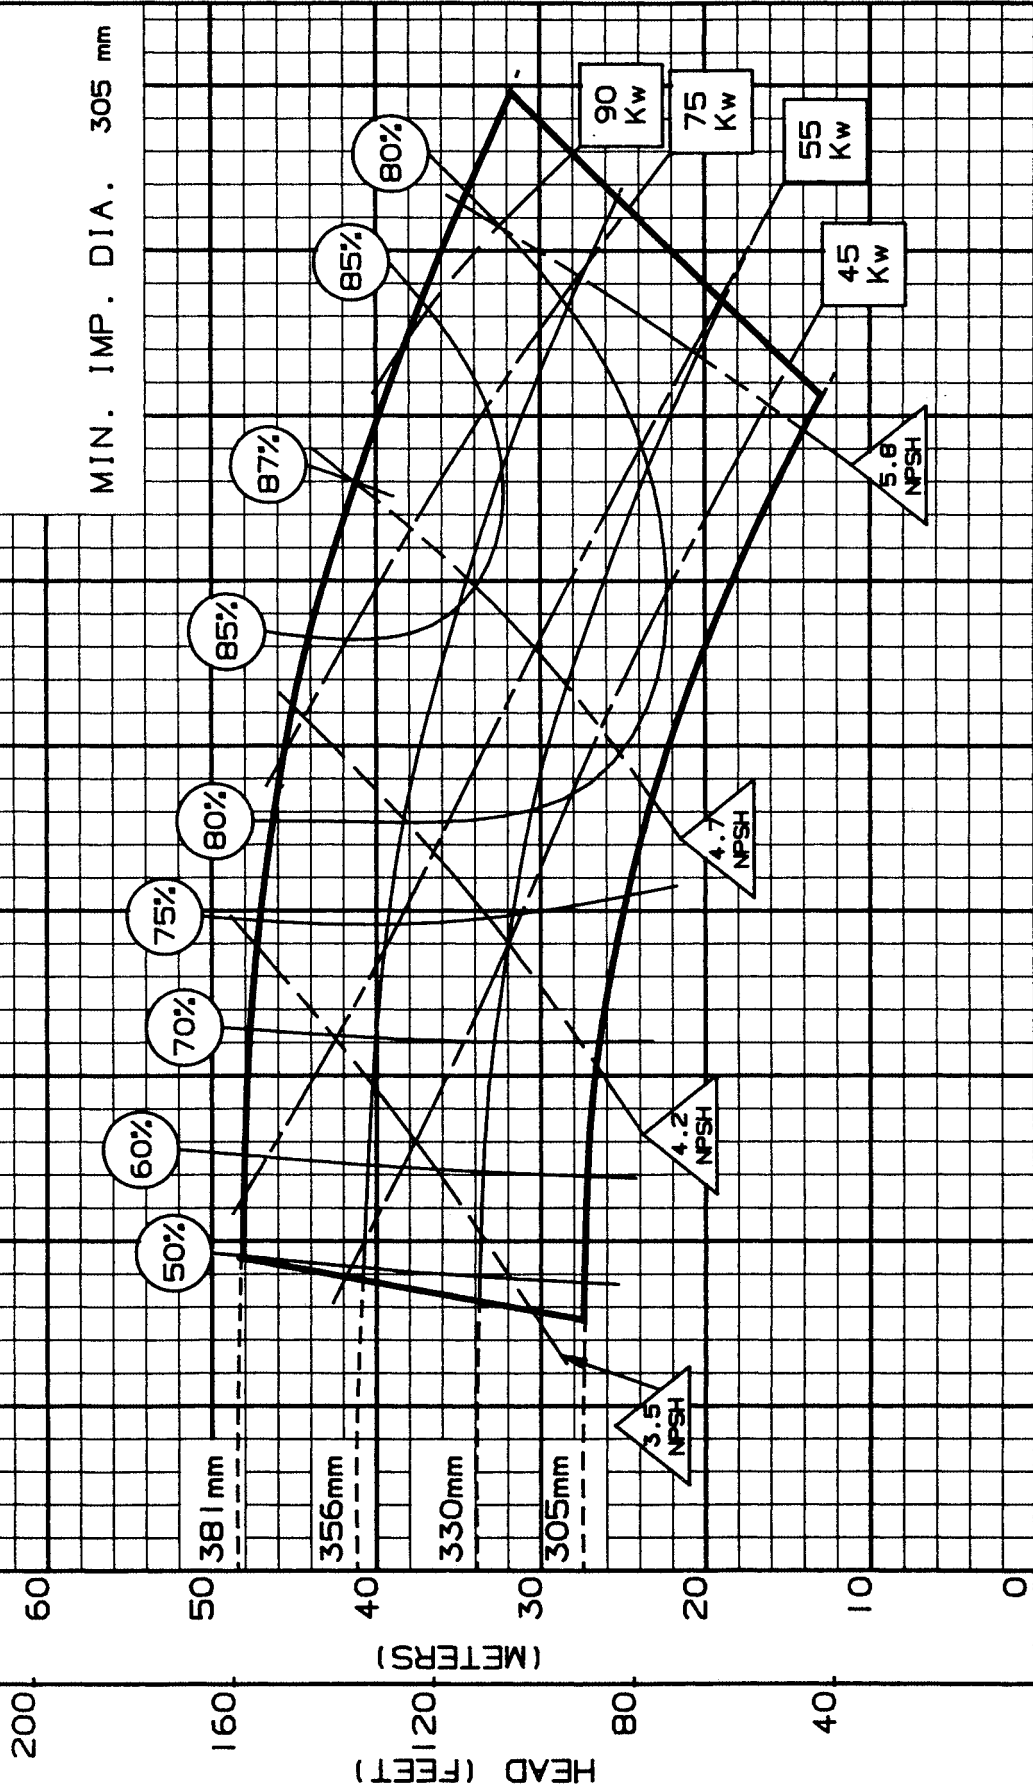


M ³ /HR	40	80	120	160	200	240	280	320	360	400	440	480	520	560	600	640	680	720	760	800	840	880	900	
L/S	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
U.S. GPM	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200

DRAWN BY: *ATL* APPROVED BY: *DL* DATE: 7-90 PC-145977M

SIZE: 8X10X15A TYPE: 360 IMPELLER: ENCLOSED R.P.M.: 980

MAX. SPHERES 41 mm
IMP. PATT. NO. 444A294
CASE PATT. NO. 180A338

MIN. IMP. DIA. 305 mm

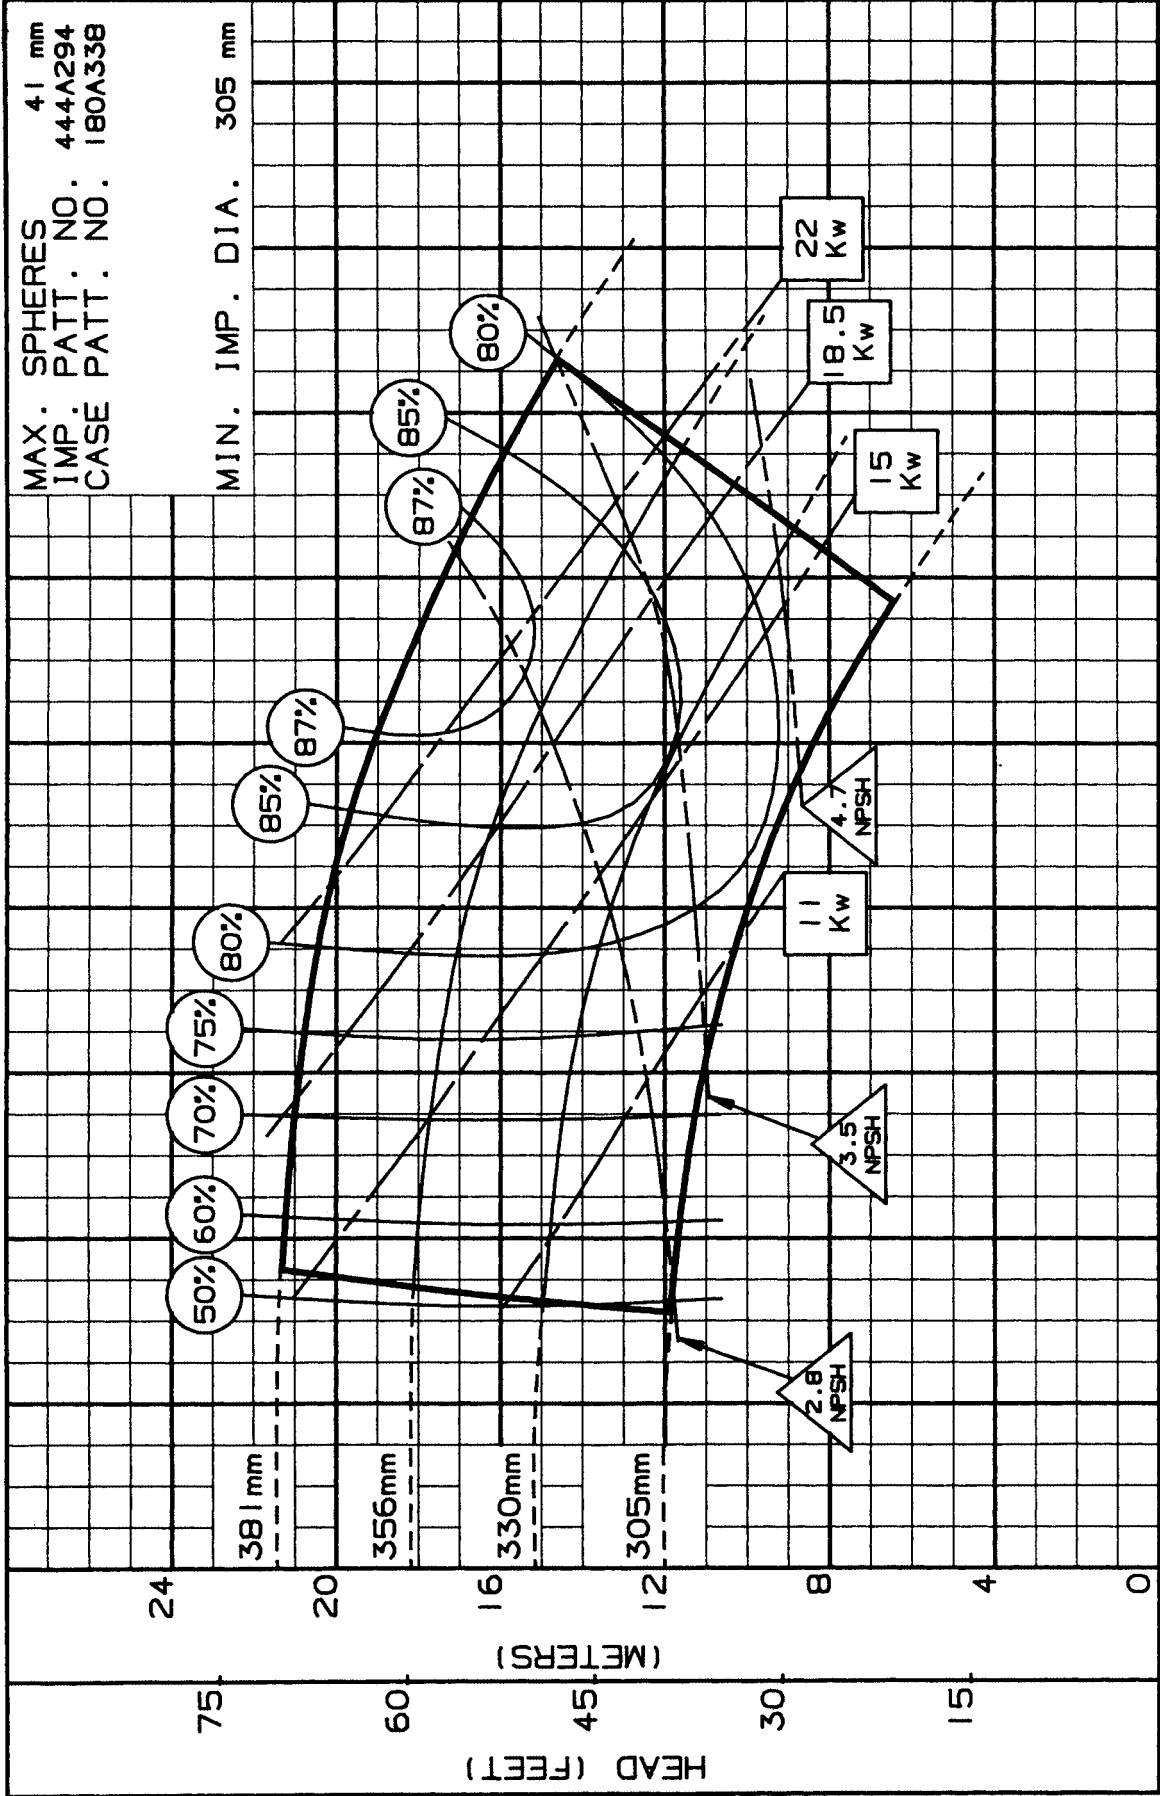

M ³ /HR	0	80	160	240	320	400	480	560	640	720
L/S	0	25	50	75	100	125	150	175	200	2800
U.S. GPM	0	400	800	1200	1600	2000	2400	2800	2800	2800

DRAWN BY: *APC* APPROVED BY: DL DATE: 7-90 PC-145976M