

# HYDROMATIC® P33A1 PEDESTAL SUMP PUMP

- Basement Sump Draining
- Industrial Circulators
- Transfer Tanks
- Dependable 1/3 HP motor pumps up to 40 GPM at 10' total dynamic head. Discharge is 1-1/4" N.P.T.
- Easily adjustable pumping range
- Non-corrosive volute/base and impeller
- Automatic reset thermal overload protection



# HYDROMATIC® P33A1 PEDESTAL SUMP PUMP


## Pump Characteristics

Pump/Motor Unit	Upright
Pump Models	P33A1
Horsepower	1/3
Full Load Amps	5.7
Motor Type	Split Phase
R.P.M.	1625
Phase Ø	1
Voltage	115
Hertz	60
Operation	Intermittent
Temperature	140°F Ambient
NEMA Design	A
Insulation	Class B
Discharge Size	1-1/4" NPT
Solids Handling	1/8"
Unit Weight	11 lbs.
Power Cord	16/3, SJT, 8'

## Materials of Construction

Pump Casing	Thermoplastic
Shaft	Thermoplastic
Impeller	Thermoplastic
Bearing	Barthane
Base	Thermoplastic
Fasteners	Stainless Steel
Float	Plastic

## Performance Data

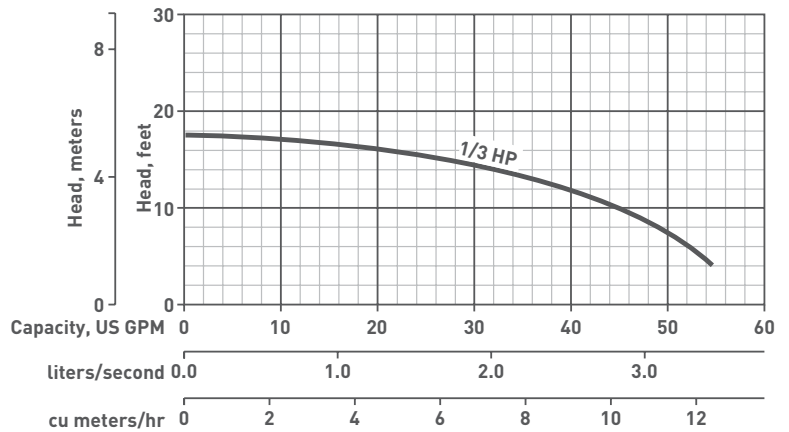

## Dimensional Data



All dimensions in inches. Component dimensions may vary  $\pm 1/8$  inch.  
Dimensional data not for construction purpose unless certified. Dimensions and weights are approximate.  
On/Off level adjustable.



USA  
293 WRIGHT STREET, DELAVAN, WI 53115 WWW.HYDROMATIC.COM  
PH: 888-957-8677 ORDERS FAX: 800-426-9446

CANADA  
269 TRILLIUM DRIVE, KITCHENER, ONTARIO, CANADA N2G 4W5  
PH: 519-896-2163 ORDERS FAX: 519-896-6337

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.