

QTPT-1 SYSTEM[†]

FOODSERVICE WATER TREATMENT SYSTEM

System:

- QTPT-1†: 160-52120

Replacement Cartridge:

- CTO-Q: 300-05830



APPLICATIONS

- ◆ Beverage

FEATURES • BENEFITS

- ◆ High-capacity activated-carbon filtration helps protect equipment against corrosive chlorine*
- ◆ Reduces any taste or odor caused by plastic or rubber materials commonly used with RO water storage tanks*
- ◆ Gradient-density sediment filtration reduces sediment as small as 2 microns*
- ◆ Sturdy mounting bracket and full-flow inlet shut-off valve simplify installation
- ◆ Inlet shut-off valve makes filter replacement quick and simple
- ◆ Utilizes Qwik-Twist cartridges that make changing filters quick, easy and sanitary
- ◆ CTO-Q cartridge is NSF/ANSI Standard 42 certified for material requirements

INSTALLATION TIPS

- ◆ Feed-water connection to system should be COLD only.
- ◆ Do not exceed system specifications for temperature and pressure.
- ◆ Allow 3" clearance below system for filter cartridge removal and replacement.
- ◆ Detailed installation, operation and maintenance manual included with each system.

OPERATION TIPS

- ◆ Change cartridges on a regular six (6) month preventative maintenance program.
- ◆ Change cartridges when capacity is reached or when flow becomes too slow.
- ◆ Always flush the filter cartridge at time of installation and cartridge change.

SIZING

- ◆ Rated Capacity: 22,500 gals. (85,162 L)

* As tested by Pentair.

† Not performance tested or certified by NSF.

QTPT-1 SYSTEM[†]


160-52120

System:

- QTPT-1[†]: 160-52120

Replacement Cartridge:

- CTO-Q: 300-05830

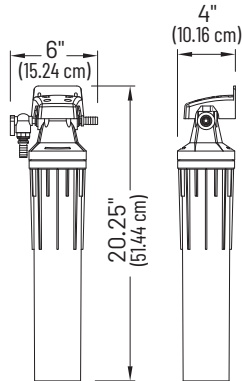

SPECIFICATIONS

- ◆ **Service Flow Rate**
Maximum 2.25 gpm (8.5 Lpm)*
- ◆ **Rated Capacity**
22,500 gallons (85,162 L)*
- ◆ **Pressure Requirements**
10 – 125 psi (0.7 – 8.6 bar), non-shock
- ◆ **Temperature**
35 – 100°F (2 – 38°C)
- ◆ **Overall Dimensions**
20.3" L x 6.0" W x 4.0" D
51.44 cm x 14.24 cm x 10.16 cm
- ◆ **Inlet Connection**
Inlet Connection: 3/8" PTC or
1/2" hose barb
- ◆ **Outlet Connection**
3/8" PTC or
1/2" hose barb
- ◆ **Shipping Weight**
5 lbs (2.27 kgs)
- ◆ **Electrical Connection**
None required



CTO-Q is Tested and Certified by NSF International against NSF/ANSI Standard 42 for material requirements only.

*As tested by Pentair.

[†]Not Performance Tested or Certified by NSF.

For Pentair product warranties visit:

<http://pentair.com/assets/foodservice-warranty>



United States | 1040 Muirfield Drive | Hanover Park, IL 60133 | 800.942.1153 (US Only) 630.307.3000 Main | cseverpure@pentair.com | foodservice.pentair.com

Australia | 1-21 Monash Drive | Dandenong South, Vic 3175 | Australia | 011.1300 576 190 Tel | au.everpure@pentair.com

China | 21F Cloud 9 Plaza, NO 1118 | Shanghai, 200052 | China | 86.21.3211.4588 Tel | china.water@pentair.com

India | Boulevard, B-9/A, 7th Floor - Tower B Sector 62 | Noida - 201301 | 91.120.419.9444 Tel | indiacustomer@pentair.com

Europe | Pentair Water Belgium BV | Industriepark Wolfstee, Toekomstlaan 30, B-2200 Herentals | Belgium | +32.(0).14.283.504 Tel | sales@everpure-europe.com

Southeast Asia | 390 Havelock Road, | #04-01 King's Centre | Singapore 169662 | 65.6768.5800 Tel | cseverpure@pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners

©2025 Pentair. All Rights Reserved.

160-52120 AU25