

ENDURANCE® HIGH FLOW QUAD CARTRIDGE KIT

System Part Number: EV9628-72

Includes 4 - SEN, 1 - 2SR-BW, 1 - Pleated Prefilter



FEATURES • BENEFITS

- ◆ Integrated scale inhibitor cartridge helps minimize the potential for scale formation† and helps ensure reliable, efficient equipment operation.
- ◆ Helps minimize equipment clogging, corrosion, and abrasion to ensure optimum equipment performance
- ◆ Balanced cartridge for optimal performance in varying water qualities
- ◆ Easy, sanitary, quick-change cartridge replacement
- ◆ Increased capacity for extended reduction of chemical and mechanical contaminants
- ◆ Pretreatment provided by unique pleated membrane with a large surface area
- ◆ NSF/ANSI Standard 53 certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means
- ◆ NSF/ANSI Standard 42 certified for Bacteriostatic Effects and the Reduction of Chlorine Taste & Odor, and Particulate Class I
- ◆ NSF/ANSI Standard 401 certified for Microplastics Reduction
- ◆ Proprietary Fibredyne II filtration media effectively inhibits the growth of bacteria on the filter media that can decrease product life.

APPLICATIONS

- ◆ Replacement cartridge kit for Everpure Endurance high flow quad system
- ◆ Fountain beverages
- ◆ Multiple applications

* Validated by ISO 17025 accredited lab for 99.999% reduction of *Pseudomonas diminuta* following the ASTM F838-05 protocol for the validation of 0.2 µm sterilizing grade filters.

† As tested by Pentair.


EPA No. 002623-IL-002

INSTALLATION TIPS

- ◆ Install vertically and allow 5" (12.7 cm) clearance below the cartridges for easy removal and replacement.
- ◆ Flush cartridges by running water through the filter for five (5) minutes.
- ◆ Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).
- ◆ It is recommended to replace cartridges at least once a year.

ENDURANCE® HIGH FLOW QUAD CARTRIDGE KIT

EV9628-72

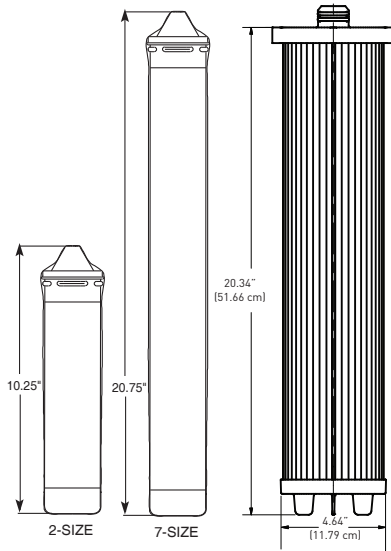

Specifications

Rated Service Flow

15 gpm (56.8 Lpm)

Rated Capacity

200,000 gallons (757,082 L)

Operating Pressure

10 - 100 psi (0.7 - 6.9 bar), non-shock

Water Temperature

35 - 100°F (2 - 38°C)

Shipping Weight

19 lbs (8.62 kgs)

For Pentair Everpure Product Warranties visit:
<http://pentair.com/assets/foodservice-warranty>

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.



System Tested and Certified by NSF International against NSF/ANSI Standards 42, 53 and 401 for the reduction of:

STANDARD NO. 42 – AESTHETIC EFFECTS

Bacteriostatic Effects
 Chemical Reduction
 Taste and Odor
 Chlorine

Mechanical Filtration
 Nominal Particulate Class I

STANDARD NO. 53 – HEALTH EFFECTS

Mechanical Filtration
 Turbidity
 Cyst

STANDARD NO. 401 – EMERGING COMPOUNDS/ INCIDENTAL CONTAMINANTS

Mechanical Filtration
 Microplastics



AS/NZS 3487
 WM 040224
 Global-Mark.com.au



1040 Muirfield Drive | Hanover Park, IL 60133 | 800.942.1153 (US Only) 630.307.3000 Main | cseverpure@pentair.com | foodservice.pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2023 Pentair. All rights reserved.

EV9628-72 AU23