



► FROM PENTAIR WATER SOLUTIONS

# SR-X FEEDER/DELIMING SYSTEM

System Part Number: EV979720



## SYSTEM DESCRIPTION

The SR-X scale inhibitor and deliming system effectively reduce scale buildup on commercial warewashing and steam equipment. These attributes work to reduce corrosion and help to enhance the overall effectiveness and durability of your equipment.

## FEATURES • BENEFITS

- ◆ A complete system that effectively targets scale
- ◆ Patented design dispenses a controlled amount of Hydroblend for long-term protection
- ◆ A sophisticated blend of polyphosphate compound represents an advancement in scale inhibition
- ◆ Helps provide protection against equipment corrosion
- ◆ System includes black Everpure from Pentair Water Solutions SR-X housing, Everpure SS-10 cartridge, dip tube assembly, and a 2.2 lb Pentair Everpure ScaleKleen package
- ◆ The SS-10 is NSF® Certified under NSF/ANSI Standard 42 for material requirements only
- ◆ SS-10 cartridge is more effective in higher alkalinity/hardness/TDS/temperature installations

## APPLICATIONS


- ◆ Deliming
- ◆ Scale reduction
- ◆ Steam (boiler-based)

## INSTALLATION TIPS

- ◆ Choose a mounting location suitable to support the weight of the system while operating.
- ◆ Install vertically and allow 2½" (6.35 cm) clearance below the cartridge for easy removal and replacement.
- ◆ Make sure to properly lubricate o-ring prior to use.
- ◆ Use 3/4" water line (optional reducer bushings included).
- ◆ For steam applications, connect the system to the boiler water only. Do not connect to the condenser.
- ◆ Feed water supply pressure must not exceed 125 psi (non-shock). When pressure exceeds 85 psi, a pressure reducing valve is recommended.
- ◆ Flush cartridges by running water through the system for five (5) minutes.
- ◆ For more details, see the installation, operation, and maintenance guide included with the system.

# SR-X

EV979720

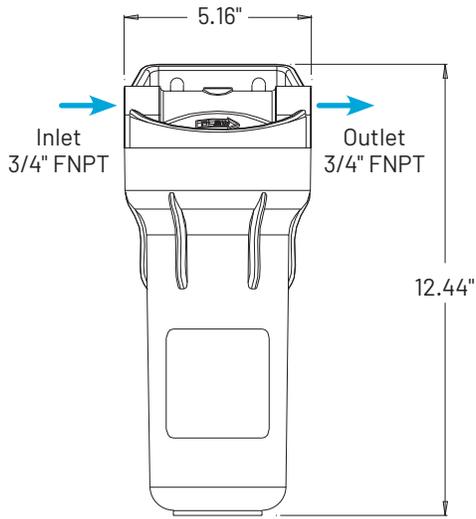

## SPECIFICATIONS

System	Performance
<b>Overall Dimensions</b> 12.44" H x 5.16" W x 5.5" D (31.5 cm x 13.1 cm x 13.9 cm)	<b>Service Flow Rate</b> Maximum 6 gpm (22.7 lpm)
<b>Connections</b> Inlet: 3/4" FNPT Outlet: 3/4" FNPT	<b>Reduces Scale</b> Yes
<b>Operating Pressure</b> 10 - 125 psi (0.7 - 8.6 bar)	<b>Deliming Capabilities</b> Yes
<b>Water Temperature</b> 35 - 100°F (2 - 38°C)	
<b>Operating Weight</b> 6 lbs (2.72 kgs)	
<b>Shipping Weight</b> 5 lbs (2.27 kgs)	
<b>Electrical Connection</b> None required	

## REPLACEMENT CARTRIDGE & SCALEKLEEN

Model	Qty	Description	Part No
SS-10	1	Scale Stick Cartridge	EV979902
ScaleKleen	24	Scale Remover 7 oz	EV979833
ScaleKleen	4	Scale Remover 2.2 lbs	EV979835

For Pentair Everpure Product Warranties visit:  
<http://pentair.com/assets/foodservice-warranty>.  
To receive a free copy email or call your Pentair representative using the information provided below.

It is recommended that filter cartridges be replaced every six (6) months on a regular scheduled program, or when capacity is reached or if water pressure or flow to equipment becomes inadequate.

Replace SS-10 cartridge before Hydroblend™ is completely dissolved.

Always replace filter cartridges at least once per year.

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.



1040 Muirfield Drive | Hanover Park, IL 60133 | 800.942.1153 (US Only) 630.307.3000 Main | [cseverpure@pentair.com](mailto:cseverpure@pentair.com) | [foodservice.pentair.com](http://foodservice.pentair.com)

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2026 Pentair. All rights reserved.

EV979720 FE26