

ENDURANCE® HIGH FLOW QUAD SYSTEM

System Part Number:

Endurance High Flow Quad: EV9437-32

Endurance Quad Cartridge Kit: EV9628-72*

* not shown



FEATURES • BENEFITS

- ◆ High capacity allows the system to keep up high water demands and allows less time between cartridge replacement
- ◆ Unique pretreatment system features pleated membrane with a large surface area
- ◆ Easy and quick cartridge replacement
- ◆ Exclusive Fibredyne™ II media provides chlorine taste & odor reduction and micro-filters dirt and particles as small as 0.2 micron†
- ◆ Utilizes Everpure phosphate cartridge to minimize scale reduction
- ◆ Proprietary Fibredyne™ II filtration media effectively inhibits the growth of bacteria on the filter media that can decrease product life
- ◆ NSF/ANSI Standard 53 certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means
- ◆ NSF/ANSI Standard 42 certified for Bacteriostatic Effects and Reduction of Chlorine Taste & Odor, and Particulate Class I
- ◆ NSF/ANSI Standard 401 certified for Microplastics Reduction

APPLICATIONS

- ◆ Multiple equipment & combination systems
- ◆ High-volume installations

† Validated by ISO 17025 accredited lab for 99.999% reduction of *Pseudomonas diminuta* following the ASTM F838-05 protocol for the validation of 0.2 µm sterilizing grade filters


EPA No. 002623-IL-002

INSTALLATION TIPS

- ◆ Choose a mounting location capable of safely supporting the full weight of the system when in operation.
- ◆ Use 3/4" water line.
- ◆ Fountain equipment connections are made to the outlet part of the system before the Everpure 2SR-BW cartridge.
- ◆ Coffee brewer and ice machine connections are made after the Everpure 2SR-BW scale inhibitor cartridge; a tee is required.
- ◆ Install vertically and allow 5" (12.7 cm) clearance below the cartridge for easy removal and replacement.
- ◆ Frame is designed to mount on 16" centers (wall studs).

ENDURANCE® HIGH FLOW QUAD SYSTEM

EV9437-32

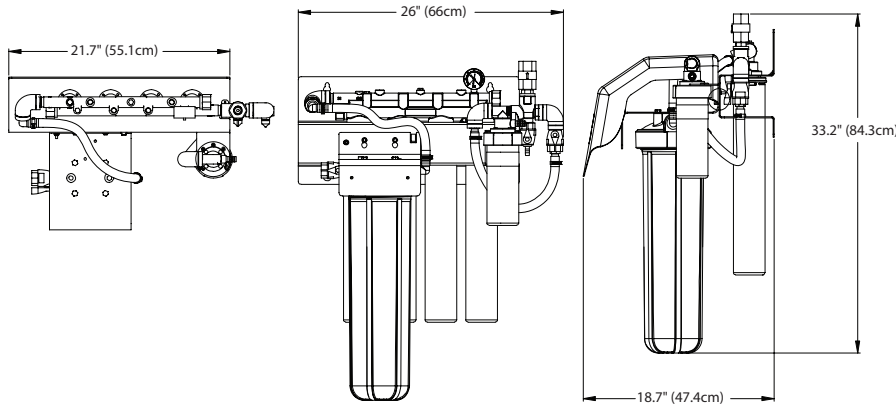

Specifications

Overall Dimensions

33.2" H x 26" L x 18.7" D
(84.3 cm x 66 cm x 47.4 cm)

Service Flow Rate

15 gpm (56.8 Lpm)

Rated Capacity

200,000 gallons (757,082 liters)

Operating Pressure

10 - 100 psi (0.7 - 6.9 bar), non-shock

Connections

Inlet Connection: 3/4" FNPT

Shipping Weight

49 lbs (22.23 kgs)

Operating Weight

69.1 lbs (31.3 kgs)

Water Temperature

35 - 100°F (2 - 38°C)

Electrical Connection

None required

For Pentair Everpure Product Warranties visit:
<http://pentair.com/assets/foodservice-warranty>

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.



System Tested and Certified by NSF International against NSF/ANSI Standards 42, 53, and 401 for the reduction of:

STANDARD NO. 42 – AESTHETIC EFFECTS	STANDARD NO. 53 – HEALTH EFFECTS
Bacteriostatic Effects	Mechanical Filtration
Chemical Reduction	Cyst
Taste & Odor	Turbidity
Chlorine	
Mechanical Filtration Nominal Particulate Class I	STANDARD NO. 401 – EMERGING COMPOUNDS / INCIDENTAL CONTAMINANTS
	Mechanical Filtration Microplastics



1040 Muirfield Drive | Hanover Park, IL 60133 | 800.942.1153 (US Only) 630.307.3000 Main | cseverpure@pentair.com | foodservice.pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2023 Pentair. All rights reserved.

EV9437-32 JL23