

# FRESHPOINT® F3000-B2B

## THREE STAGE FILTRATION SYSTEM



### APPLICATIONS

- ◆ Drinking water

### FEATURES • BENEFITS

- ◆ Certified to reduce up to 99.7% of Total PFAS\*\*
- ◆ Effortless click-in cartridge change-outs
- ◆ Color-coded cartridges help maintain proper filter sequence
- ◆ 3/8" push fittings for easy installation

### INSTALLATION TIPS

- ◆ Choose a mounting location suitable to support the full weight of the system when operating.
- ◆ Install vertically with the cartridge hanging down.
- ◆ System may be installed with cartridge flush to the baseboard if desired, as the mechanical assist lever pushes cartridges straight out.


### OPERATION TIPS

- ◆ Replace cartridge every 675 gallons or 1 year (or if flow has diminished).
- ◆ Place replacement cartridges in proper sequence utilizing color-coded shapes.
- ◆ System is designed with integrated check valves so cold water line does not need to be shut off to perform cartridge change-outs.

### INCLUDES

- ◆ Side faucet
- ◆ Installation kit
- ◆ Installation and operation manual

# FRESHPOINT F3000-B2B THREE STAGE FILTRATION SYSTEM

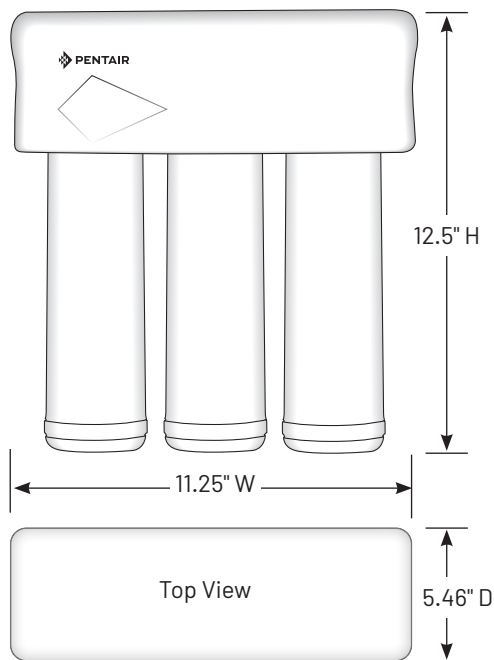

## SPECIFICATIONS

- ◆ **System** (Model/Part No.)  
F3000-B2B/158840
- ◆ **Inlet Size**  
3/8" QC
- ◆ **Dimensions**  
12.5" H x 11.25" W x 5.46" D  
(317 mm x 285 mm x 139 mm)
- ◆ **System Weight**  
6 lbs (2.72 kg)
- ◆ **Contaminant Reduction**  
Chlorine Taste & Odor  
Lead  
Atrazine  
Nominal Particulate Class I  
Total PFAS  
Cysts: NSF/ANSI Standard 53  
certified to reduce cysts such as  
*Cryptosporidium* and *Giardia* by  
mechanical means.
- ◆ **Micron Rating**  
0.50
- ◆ **Approximate Filter Life\***  
Up to 1 Year
- ◆ **Capacity**  
675 Gallons (2,555.15 liters)
- ◆ **System Production Rate**  
0.60 gpm (2.27 Lpm)  
(Side Faucet Required)
- ◆ **Certifications**  
NSF/ANSI Standard 53/42  
CSA Standard B483.1
- ◆ **Feed Pressure Range**  
40 - 100 psi (2.75 - 6.89 bar)
- ◆ **Temperature Range**  
40 - 100°F (4.4 - 37.8°C)
- ◆ **Replacement Cartridges**  
(Model/Part No.)  
F1S5-RC/655116-96  
F2B2-RC2/655126-96 (twin pack)

\* Filter life dependent on gallon usage  
and overall incoming water quality.

EPA Est. No. 082989-CHN-001



The model F3000-B2B is Tested and Certified by NSF International against NSF/ANSI Standards 42, 53 and CSA B483.1 for the reduction of substances specified in the service manual or at [www.nsf.org](http://www.nsf.org).



The model F3000-B2B is certified by IAPMO R&T against NSF/ANSI 53 for the reduction of Total PFAS.\*\*

\*\*The test mixture for total PFAS is made up of PFOA (500 ppt), PFOS (1,000 ppt), PFHxS (300 ppt), PFNA (50 ppt), PFHpA (40 ppt), PFBS (260 ppt), and PFDA (10 ppt). This system meets the 20 ppt requirement for Total PFAS.



## Pentair Residential Filtration

13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States

P: 262.238.4400 | Customer Service: 800.279.9404 | [tech-support@pentair.com](mailto:tech-support@pentair.com) | [pentair.com](http://pentair.com)

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.