

# FLOPLUS PROTECT 20BB

## PFAS FILTRATION SYSTEM



### APPLICATION

- ◆ Whole Home

### FEATURES • BENEFITS

- ◆ Professional grade PFAS reduction system for the whole home
- ◆ System is certified to reduce five PFAS compounds, commonly known as “forever chemicals” up to 99.82%
- ◆ Proprietary Fibredyne™ technology provides high-flow rate with low pressure drop
- ◆ 40,000 gallon capacity at 5 gpm flow rate
- ◆ Integrated pressure relief valve for easier cartridge change-outs
- ◆ Complete system with cartridge, wrench, mounting bracket kit and manual

### INSTALLATION TIPS

- ◆ Choose a mounting location suitable to support the full weight of the system when operating.
- ◆ Make sure to properly lubricate O-ring prior to use.
- ◆ Install vertically with bowl hanging down.
- ◆ Allow 2-1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.

### OPERATION TIPS

- ◆ Replace cartridge if flow rate decreases.
- ◆ Inspect O-ring during each cartridge change. Lubricate and/or replace if necessary.


### SIZING

- ◆ Service Flow Rate: 5 gpm

### INCLUDES

- ◆ 20" filter housing
- ◆ 20" filter cartridge
- ◆ Wrench
- ◆ Mounting bracket with screws
- ◆ Installation and operation manual

# FLOPLUS PROTECT 20BB PFAS FILTRATION SYSTEM

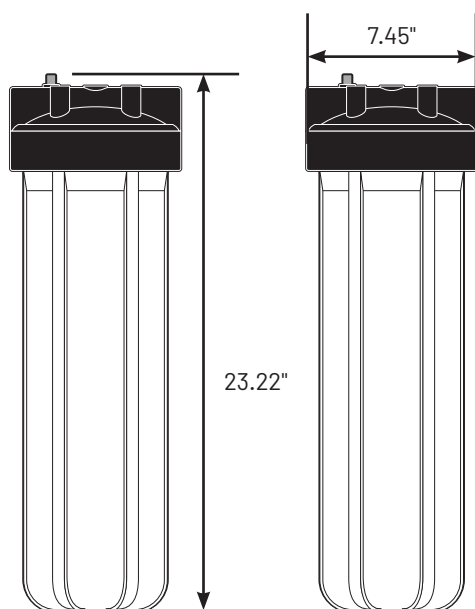

## SPECIFICATIONS

- ◆ **System** (Model/Part No.)  
PFAS Filtration System  
FloPlus Protect 20BB/150736 (1/Case)
- ◆ **Housing Size**  
20" Heavy duty
- ◆ **Inlet Size**  
1" FPT
- ◆ **Housing Material**  
Polypropylene
- ◆ **System Dimensions**  
23.22" H x 7.45" W  
(590 mm x 189 mm)
- ◆ **Cartridge Type**  
Fibredyne Carbon Block
- ◆ **Contaminant Reduction**  
PFOA, PFOS, PFHxS, PFNA,  
and PFHpA
- ◆ **Micron Rating**  
1
- ◆ **Approximate Filter Life\***  
12 months
- ◆ **Capacity**  
40,000 gallons (151,416 L)
- ◆ **Flow Rate**  
5 gpm (18.9 Lpm)
- ◆ **Certification**  
NSF/ANSI Std. 53
- ◆ **Feed Pressure Range**  
30 - 90 psi (2.06 - 6.20 bar)
- ◆ **Temperature Range**  
40° - 100°F (4.4 - 37.8°C)
- ◆ **Replacement Cartridge**  
(Model/Part No.)  
FloPlus Protect 20BB / 655230-43  
(6/Case)

\* Filter life dependent on gallon usage and overall incoming water quality.



The model FloPlus Protect 20BB is certified by IAPMO R&T against NSF/ANSI 53 for the reduction of claims specified on the Performance Data Sheet.



Pentair Residential Filtration, LLC

13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States

P: 262.238.4400 | Customer Service: 800.279.9404 | [tech-support@pentair.com](mailto:tech-support@pentair.com) | [pentair.com](https://www.pentair.com)

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2025 Pentair. All Rights Reserved.

4006913 AP25