

# LEGACY JUST GOT BETTER:

## INTRODUCING THE **NEW** PENTEK DURA-SERIES™ STANDARD FILTER HOUSINGS

The new Pentek Dura-Series Standard Filter Housings are built to deliver the trusted performance dealers rely on - now with enhanced durability, simplified installation, and seamless compatibility.


Designed for residential, commercial, and light industrial applications, these housings offer a robust, leak-resistant solution that integrates effortlessly into existing systems. Whether you're upgrading a current setup or specifying for new installs, Dura-Series makes it easy to deliver long-lasting, certified quality.

### FEATURES AND BENEFITS

- ◆ Polycarbonate sump material significantly boosts durability and longevity
- ◆ Improved radial O-ring is designed to enhance the seal and help reduce the risk of over- or under-tightening
- ◆ Maintains existing NSF/ANSI 42 certifications for peace of mind
- ◆ Retrofits into current brackets and are compatible with all Pentek cartridges



**Pentek Dura-Series**  
Standard Filter Housings

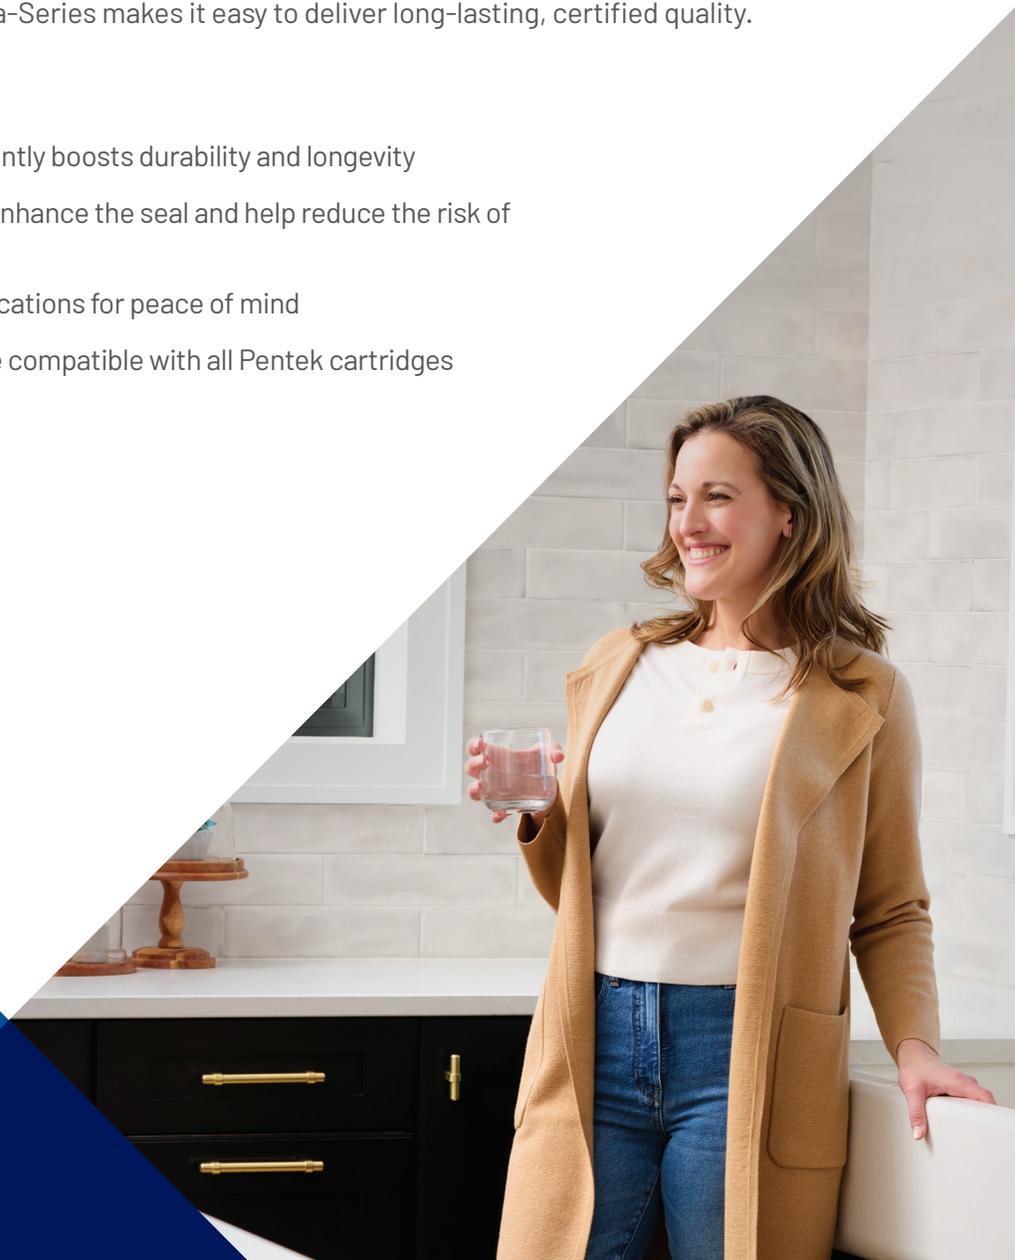

# ENJOY QUALITY WATER FROM EVERY TAP

## BUILT FOR DURABILITY AND RELIABILITY

- ▶ Constructed with a polycarbonate sump enhances strength and extends product life
- ▶ Reinforced cap and sump design includes a hard stop for a more secure, full-threaded assembly
- ▶ Maintains NSF/ANSI 42 and CSA B483.1 certifications for trusted performance

## SIMPLIFIED INSTALLATION AND MAINTENANCE

- ▶ Integrated drill bosses and bracket mounting locations support easy setup for sensors, gauges, and hardware
- ▶ Radial O-ring design helps prevent over- or under-tightening and ensures a leak-resistant seal

## VERSATILE AND COMPATIBLE DESIGN

- ▶ Retrofits into existing brackets and supports all Pentek cartridges
- ▶ Optional clear sump enables quick visual inspection of filter status
- ▶ Available in multiple sizes and configurations to fit a wide range of customer needs

## MOVE, IMPROVE, AND ENJOY WATER, LIFE'S MOST ESSENTIAL RESOURCE.

Pentair is focused on smart, sustainable water solutions that help our planet and people thrive.



Specifications	10" Dura-Series	20" Dura-Series
Maximum Dimensions	12.26" x 5.00" (311 mm x 127 mm)	22.51" x 5.00" (572 mm x 127 mm)
Initial $\Delta$ P (PSI) @ Flow Rate (GPM)	1.7 psi @ 10 gpm (0.11 bar @ 38 Lpm)	1.7 psi @ 10 gpm (0.11 bar @ 38 Lpm)
Sump Color Options	Slate or Clear	Slate
Cap Color Options	Slate	Slate

See the specification sheet for part numbers, certification information, and kitted systems details



Pentair Residential Filtration, LLC

13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States

P: 262.238.4400 | Customer Service: 800.279.9404 | [tech-support@pentair.com](mailto:tech-support@pentair.com) | [pentair.com](http://pentair.com)

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.