



# HEATERS & HEAT PUMPS

**Updated June 2025**





# ULTRATEMP ETi® HEATER

## HIGH PERFORMANCE HYBRID HEATER

### TRADEGRADE

Dual-Fuel Heating Technology is the first of its kind in the U.S. and delivers fast and economical heating options.



UltraTemp ETi HYBRID Heater

### Featured Highlights

- Available in propane and natural gas
- Gas-fired functionality for quick heat-ups
- Onboard intelligence delivers outstanding efficiency
- Titan-Tough™ Direct-Fire Titanium gas heat exchanger assures corrosion-free performance for extra long life
- 93% thermal efficiency gas engine\* coupled with high performance heat pump
- Smart controls and space savings versus installing two separate units, gas heater and heat pump
- Automation ready with seamless interfacing with Pentair Control Systems
- High efficiency design (four selectable modes: Heat Pump only, Gas only, Hybrid, Dual)
- In "Dual" mode the heater runs both the heat pump and gas heater simultaneously for maximum heat output
- In "Hybrid" mode the heater runs state-of-the-art programming logic to determine a fast and economical way to heat your pool based on user selectable water temperature differential and time period
- Dual internal water bypass assembly automatically adjusts for water flows up to 120 GPM without the need for an external water bypass

### Ordering Information

Part # ALMOND	Model	80/80/80** BTU/COP	80/63/80** BTU/COP	50/63/80** BTU/COP	Gas BTU	Freq (Hz)	Breaker Size (amp)	Phase	Volt	Ctn Wt.
ULTRATEMP ETi HEATER										
460969	220K - Natural Gas	108,000/5.8	100,000/5.6	70,000/4.0	110,000	60	50	1	230	450
462042	220K - Propane	108,000/5.8	100,000/5.6	70,000/4.0	110,000	60	50	1	230	450

\* Gas engine measures 93% thermal efficiency when tested per ANSI Z21.56:19/CSA 4.7:19 2019 section 5.10.

\* [https://www.regulations.doe.gov/certification-data/CCMS-4-Pool\\_Heaters.html#q=Product\\_Group\\_s%3A%22Pool%20Heaters%22](https://www.regulations.doe.gov/certification-data/CCMS-4-Pool_Heaters.html#q=Product_Group_s%3A%22Pool%20Heaters%22)

\*\* Rating in accordance with AHRI Standard 1160 (air temp. °F. / % relative humidity / water temp °F.)

### IMPORTANT NOTE:

The Hybrid is tested & factory-configured for either Natural Gas or Propane Gas, and it cannot be converted from one fuel type to another in the field. Please order the specific model (Natural Gas or Propane) to match the fuel source of your intended application.

#### CALIFORNIA PROPOSITION 65 WARNING


⚠ **WARNING:** Cancer and Reproductive Harm.  
 ⚠ **AVERTISSEMENT:** Peut Causer le Cancer  
 et des Dommages au Système Reproducteur.  
 ⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo.  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

SEE PAGE 363 FOR REPLACEMENT PARTS

# ULTRATEMP ETi® HEATER (CONT'D)

## HIGH PERFORMANCE HYBRID HEATER

### Dimensions and Performance

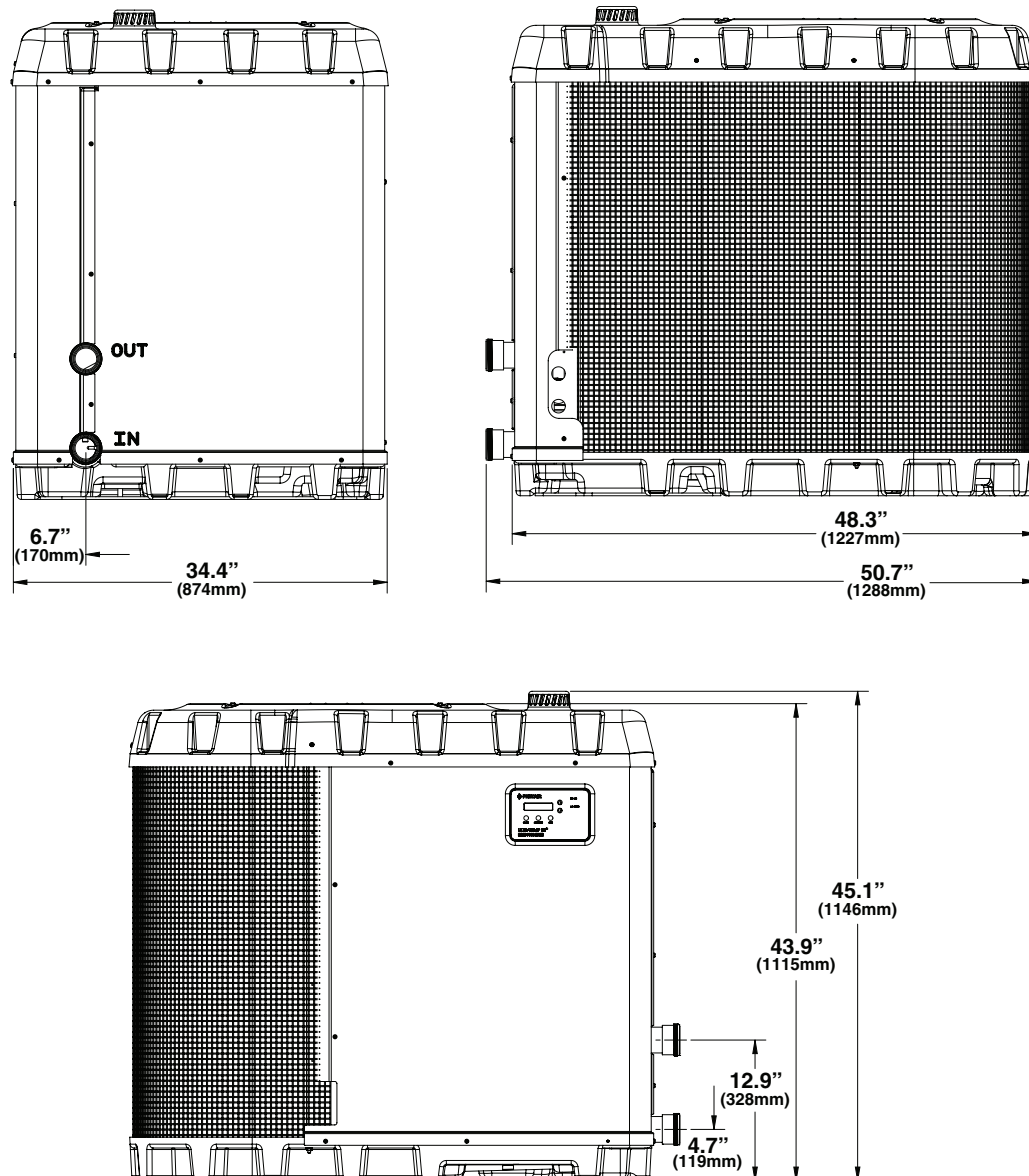

The AHRI Certified® Mark is applied only to HVACR equipment and components that have been independently tested to certify manufacturers' performance claims are accurate. Visit [www.ahridirectory.org](http://www.ahridirectory.org) for a complete list of certified products.

CEC indicates that Heat Pump has been evaluated to California Title-20, listed in the California Energy Commission's (CEC) database of compliant heat pumps, and certified to use on Residential Swimming Pool Filtration Systems.

# ETi® 400

## HIGH-EFFICIENCY POOL AND SPA HEATER

**TRADEGRADE**


ETi 400 Heater

### Featured Highlights

- Titan-Tough™ Direct-Fire Titanium ASME certified heat exchanger
- Certified for low NOx emissions<sup>1</sup>
- Best-in-class energy efficiency for fast heat up times and energy savings
- 4" PVC or CPVC vent up to 120 ft and 6" vent up to 300 ft long
- Indoor and outdoor rating
- Ultra-quiet operation
- Convenient 180 degrees rotating controls panel for left or right plumbing orientation
- Convenient front and rear gas connection capability
- Factory configured for Natural Gas. Propane Conversion Kit available
- Three years parts and labor warranty

The ETi 400 High-Efficiency Pool Heater features our Titan-Tough™ Direct-Fire Titanium Heat Exchanger, with ASME certified construction for robust, reliable heating performance. At 96% thermal efficiency<sup>2</sup>, the ETi 400 heater has **the highest efficiency built in its class to date in the U.S.**<sup>3</sup> All this in a heater that operates with ultra-quiet noise level and **out performs existing energy emissions standards.**

### Ordering Information

Product	Gas Type	BTU (400,000)	Crate Qty.	Crate Wt.
ETi 400 HIGH EFFICIENCY HEATER				
461113	Natural	400,000 BTU—ASME LISTED	1	365
ACCESSORIES				
475971	Direct Air Intake Kit ( for indoor installations)		1	5
475612	Condensate Neutralizer Cartridge Kit		1	5
476072	Propane Gas Conversion Kit		1	2

<sup>1</sup> Certified by a third party test lab and communicated to SCAQMD for Rule 1146.2

<sup>2</sup> Gas engine measures 96% thermal efficiency when tested per ANSI Z21.56:19/CSA 4.7:19 2019 section 5.10.

<sup>3</sup> [https://www.regulations.doe.gov/certification-data/CCMS-4-Pool\\_Heaters.html#q=Product\\_Group\\_s%3A%22Pool%20Heaters%22](https://www.regulations.doe.gov/certification-data/CCMS-4-Pool_Heaters.html#q=Product_Group_s%3A%22Pool%20Heaters%22)

#### CALIFORNIA PROPOSITION 65 WARNING

⚠ WARNING: Cancer and Reproductive Harm.  
 ⚠ AVERTISSEMENT: Peut Causer le Cancer  
 et des Dommages au Système Reproducteur.  
 ⚠ ADVERTENCIA: Cáncer y Daño Reproductivo.  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

SEE PAGE 363 FOR REPLACEMENT PARTS



## HEATERS AND HEAT PUMPS



# ETi® 250

## HIGH-EFFICIENCY POOL AND SPA HEATER

TRADEGRADE



ETi 250 High-Efficiency Pool and Spa Heater

### Featured Highlights

- Corrosion-resistant Titan-Tough™ Direct-Fire Titanium Heat Exchanger
- Up to 96% thermal efficiency.<sup>1</sup> For every \$1 of natural gas that's piped into the heater, up to 96 cents goes directly to heating your pool, ensuring optimal heating
- Certified for low NOx emissions <sup>2</sup>
- Certified for Category IV PVC exhaust venting and air intake <sup>3</sup>
- 360° gas line connection options for ease-of-installation
- 270° control panel orientation options for ease-of-access.
- Large removable panels make accessing the heater internals easier
- Plumbing aligns exactly to MasterTemp® and Max-E-Therm® heaters, making ETi 250 an ideal drop-in replacement on tight equipment pads
- Three-year parts and labor warranty

The ETi 250 High-Efficiency Pool Heater features our Titan-Tough™ Direct-Fire Titanium Heat Exchanger, with ASME certified construction for robust, reliable heating performance. Choose the ETi 250 heater for applications that are tight on space or where 250,000 BTUs can get the job done. All this in a heater that provides up to 96%\* thermal efficiency, for more energy savings over standard heaters and faster heat-up times.

### Ordering Information

Part #	Description	Gas Type	BTUs	Dimensions (IN)	Weight (Lbs.)	Voltage	Breaker Size
ETI 250 HIGH EFFICIENCY POOL AND SPA HEATER							
461112	ETi 250 High-Efficiency Pool Heater	Natural	250,000	25L x 25W x 32H	270	120 or 240/60Hz/1Ph	15 AMP
ACCESSORIES							
462057	ETi 250 High-Altitude Conversion Kit for 2,000 ft–10,000 ft.	Natural		12L x 7W x 5H	2		
476370	ETi 250 Propane Conversion Kit from 0–2,000 ft	Propane		8L x 8W x 8H	2		
476375Z	ETi 250 Condensate Neutralizer Replacement Kit						
476371	ETi 250 Indoor Direct Air Intake Kit						
462048	Smart Heater Bypass Kit						

<sup>1</sup> ETi 250 is 94% efficient when operated on natural gas and is 96% efficient when operated on propane with available conversion kit.

<sup>2</sup> Certified by a third party test lab and communicated to SCAQMD for Rule 1146.2

<sup>3</sup> Certified by CSA in compliance with CSA/ANSI Z21.56:19/CSA 4.7:19

#### CALIFORNIA PROPOSITION 65 WARNING

⚠ **WARNING:** Cancer and Reproductive Harm.  
 ⚠ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.  
 ⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo.  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)




SEE PAGE 363 FOR REPLACEMENT PARTS



# ETi® 250 (CONT'D)

## HIGH EFFICIENCY POOL AND SPA HEATER

### Dimensions and Performance

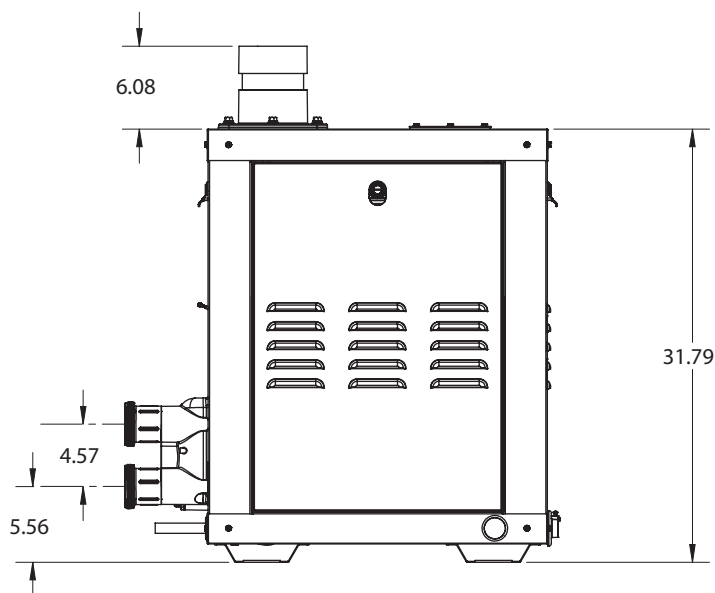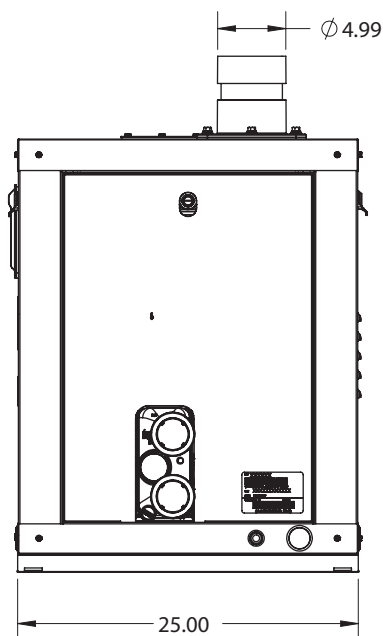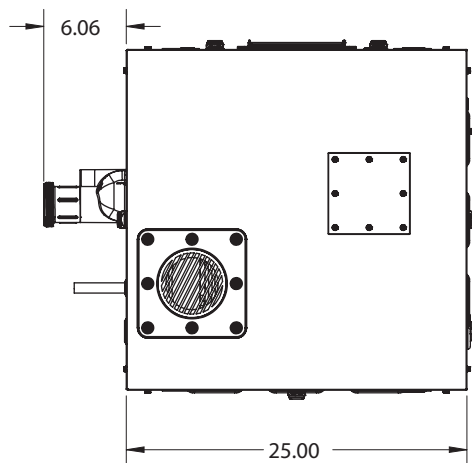

# MASTERTEMP® HEATER

## HIGH PERFORMANCE HEATER

TRADEGRADE



MasterTemp High Performance Heater

### Featured Highlights

- Now with smart connectivity, it's easier than ever to get the pool warm and ready whenever it's needed
- Digital connectivity with your pool's automation system and an advanced ignition control module with flame strength sensor help to ensure optimal heater performance
- MasterTemp Heater is certified for low NOx emissions
- Multi-position top panel allows digital display to be re-positioned for convenient operation
- Tough, rustproof exterior handles the heat and weathers the elements
- Certified for outdoor and indoor installations <sup>1</sup>
- Optional Smart Heater Bypass valve control diverts water flow when the heater isn't needed to help save up to 35% in yearly operational costs\*

MasterTemp Heaters offer all the efficiency, convenience and reliability features you want in a pool heater, plus a lot more. As easy to use as your home heating system, plus, user-friendly LCD display and troubleshoot icons make system operation and monitoring a snap. The compact design and super-quiet operation won't intrude on your poolside leisure time. Heavy-duty (HD) unit with cupro-nickel exchanger for improved performance in more challenging applications, like low pH, high flow or heavy use.

### Ordering Information

Product	Gas Type	BTU (000's)	Heat Exchanger Efficiency	Carton Wt. Lbs.
MASTERTEMP HEATERS				
460730	Natural	200	84%	128
460731	Propane	200	84%	128
461000	Natural	200 ASME	84%	138
460732	Natural	250	84%	133
460733	Propane	250	84%	133
460771	Natural	250 ASME	84%	140
460772	Propane	250 ASME	84%	140
460806	Natural	250HD	82%	136
461020	Natural	250 ASME HD	82%	140
460734	Natural	300	84%	136
460735	Propane	300	84%	136
460736	Natural	400	84%	136
460737	Propane	400	84%	136
460805	Natural	400HD	82%	136
460775	Natural	400 ASME	84%	149
460776	Propane	400 ASME	84%	149
461021	Natural	400 ASME HD	82%	149
461031	Air Intake Kit			
462048	Smart Heater Bypass Kit			

Note:  
The MasterTemp High Performance Heater is certified for low NOx emissions.

#### CALIFORNIA PROPOSITION 65 WARNING

⚠ **WARNING:** Cancer and Reproductive Harm.  
 ⚠ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.  
 ⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo.  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

\*Savings amount based on lab testing conducted using MasterTemp 400® heater in conjunction with IntelliFlo® VSF Pump and Bypass Kit, which includes IntelliValve® controlled by heater. Test Conditions: Pump flow rate: 50gpm. Pump run time: 3000 hours/yr. Heater run time: 100 hours/yr. Electrical Cost: \$0.21 per kWh. System TDH: Heater and Bypass Kit added to Standardized "Curve C" System Curve performance data as per California Energy Commission Title 20 Appliance Efficiency Regulations. Test conditions assume pump flow rate of 50gpm and Constant Flow operation utilizing a lower motor RPM when flow is bypassing the heater due to lower system TDH. Actual performance and any subsequent energy consumption/savings are dependent upon various characteristics of the plumbing system, including but not limited to, pipe size, pipe lengths, filter type, fittings, system design, equipment run time/settings and more.


<sup>1</sup> Certified by CSA in compliance with CSA/ANSI Z21.56:19/CSA 4.7:19




# MASTERTEMP® HEATER (CONT'D)

## HIGH PERFORMANCE HEATER


### Dimensions and Performance

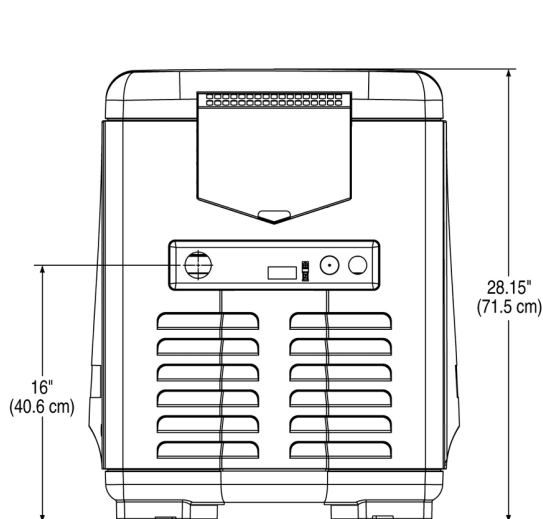


**FRONT**

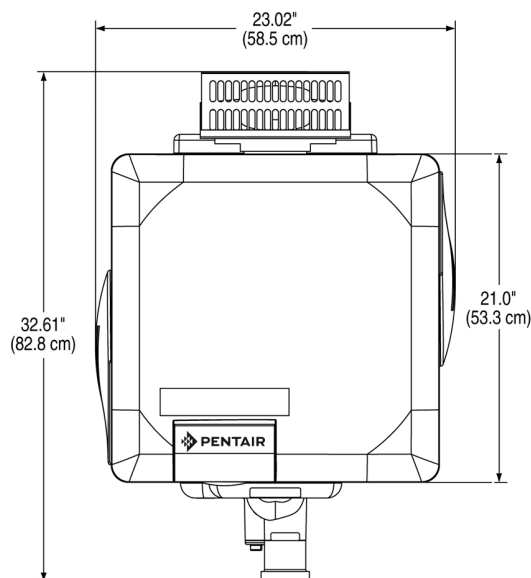

**TOP**

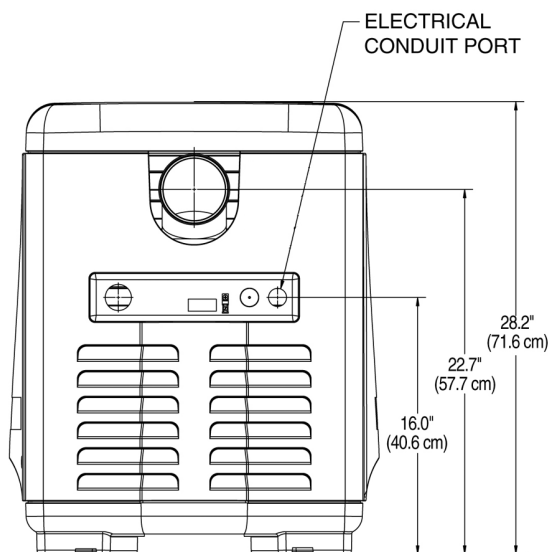

**EXHAUST SIDE**

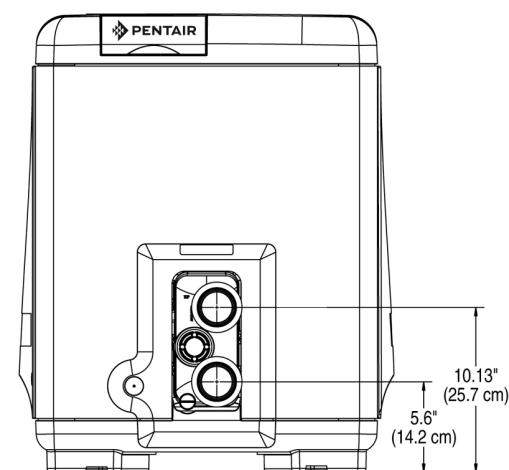

**PLUMBING SIDE**

# MASTERTEMP® 125

## HIGH PERFORMANCE HEATER

TRADEGRADE



MasterTemp 125 Heater

### Featured Highlights

- Now with smart connectivity, it's easier than ever to get the pool warm and ready whenever it's needed
- Digital connectivity with your pool's automation system and an advanced ignition control module with flame strength sensor help to ensure optimal heater performance
- MasterTemp 125 Heater is certified for low NOx emissions <sup>1</sup>
- Multi-position top panel allows digital display to be re-positioned for convenient operation
- Tough, rustproof exterior handles the heat and weathers the elements
- Certified for outdoor and indoor installations
- 1-1/2 in. Plumbing connection — ideal for smaller bodies of water, including aboveground pools, spas and in-ground pools up to 15,000 gallons
- Available in natural gas or propane gas
- Lightweight: 80 lbs. — easy to handle and ship
- 3/4 in. gas line up to 50 ft. from source
- Optional Smart Heater Bypass valve control diverts water flow when the heater isn't needed to help save up to 35% in yearly operational costs\*

The MasterTemp 125 Heater provides energy-savings and advanced operating features that were only available from much larger heaters. With its revolutionary pre-mixed gas combustion technology, the MasterTemp 125 Heater offers 82% thermal efficiency.<sup>2</sup> The advanced LCD display/controller provides more information and better control.

### Ordering Information

Product	Gas Type	BTU (000's)	Carton Wt.
MASTERTEMP 125 HIGH PERFORMANCE HEATER			
461059	Natural, with cord	125	100
461061	LP, with cord	125	100
474845	Air Intake Kit		
462048	Smart Heater Bypass Kit		

<sup>1</sup> Certified by a third party test lab and communicated to SCAQMD for Rule 1146.2

<sup>2</sup> Gas engine measures 82% thermal efficiency when tested per ANSI Z21.56:19/CSA 4.7:19 2019 section 5.10.

#### CALIFORNIA PROPOSITION 65 WARNING

⚠ **WARNING:** Cancer and Reproductive Harm.  
 ⚠ **AVERTISSEMENT:** Peut Causer le Cancer  
 et des Dommages au Système Reproducteur.  
 ⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo.  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)


SEE PAGE 363 FOR REPLACEMENT PARTS



# MASTERTEMP® 125 (CONT'D)

## HIGH PERFORMANCE HEATER

### Dimensions and Performance

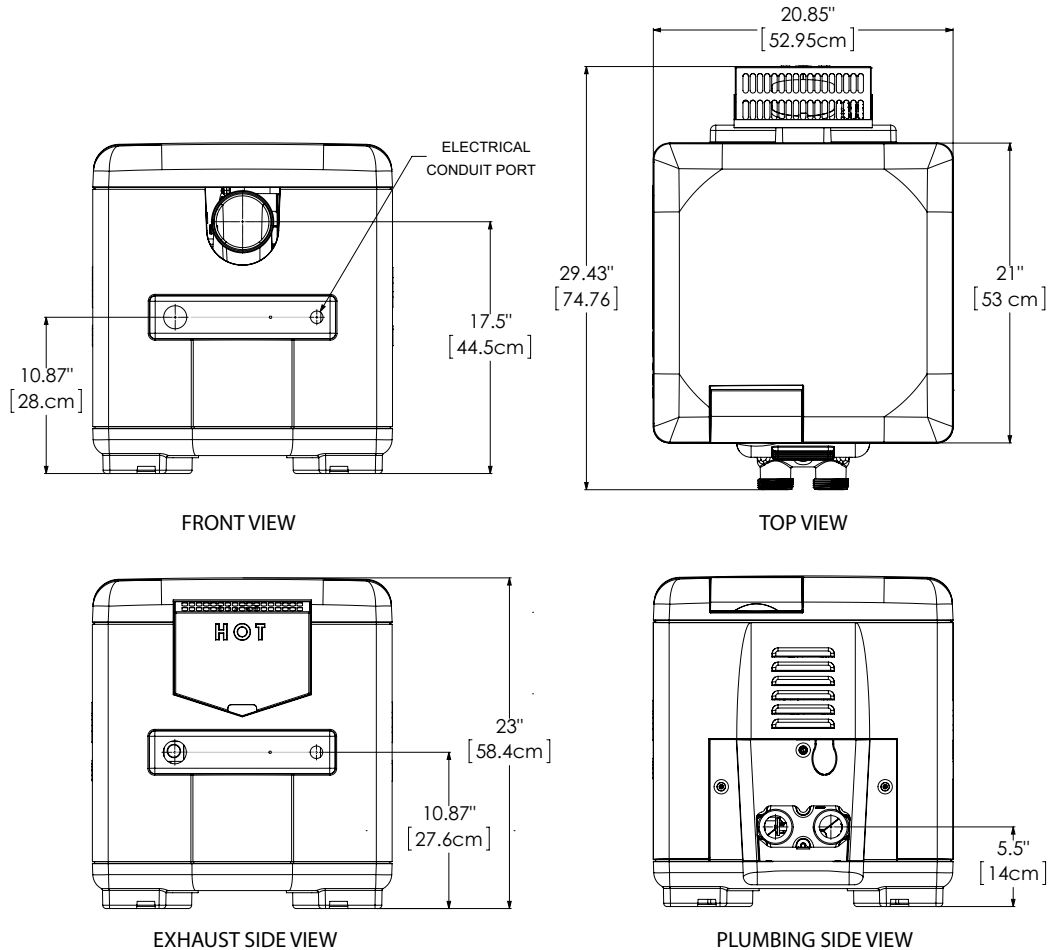

# MAX-E-THERM®

## POOL AND SPA HEATER



TRADEGRADE



Max-E-Therm Pool and Spa Heater

### Featured Highlights

- Now with smart connectivity, it's easier than ever to get the pool warm and ready whenever it's needed
- Digital connectivity with your pool's automation system and an advanced ignition control module with flame strength sensor help to ensure optimal heater performance
- Max-E-Therm Heater is certified for low NOx emissions\*
- Multi-position top panel allows digital display to be re-positioned for convenient operation
- Tough, rustproof exterior handles the heat and weathers the elements
- Certified for outdoor and indoor installations
- Optional Smart Heater Bypass valve control diverts water flow when the heater isn't needed

For indoor or outdoor installations on pools and spas. Features include an LCD temperature readout with dual thermostat controls, temperature safety lockout, and six-position control panel. PMG burner technology requires no outdoor draft hood. Proven Dura-Glas™ Resin provides rust-proof construction. Heavy-duty (HD) unit with cupro-nickel exchanger for improved performance in more challenging applications, like low pH, high flow or heavy use.

### Ordering Information

Product	Description	BTU (000's)	Heat Exchanger Efficiency	Carton Wt.
MAX-E-THERM POOL/SPA HEATER				
SR200NA	Max-E-Therm 200 BTU Natural Gas Heater	200	84%	131
SR200LP	Max-E-Therm 200 BTU Propane Gas Heater	200	84%	131
SR200HD	Max-E-Therm 200 BTU Heavy Duty Heater	200	82%	131
SR333NA	Max-E-Therm 333 BTU Natural Gas Heater	333	84%	138
SR333LP	Max-E-Therm 333 BTU Propane Gas Heater	333	84%	138
SR333HD	Max-E-Therm 333 BTU Heavy Duty Heater	333	82%	138
SR400NA	Max-E-Therm 400 BTU Natural Gas Heater	400	84%	138
SR400LP	Max-E-Therm 400 BTU Propane Gas Heater	400	84%	138
SR400HD	Max-E-Therm 400 BTU Heavy Duty Heater	400	82%	138
475002	Air Intake Kit			
462048	Smart Heater Bypass Kit			

\*Certified by a third party test lab and communicated to SCAQMD for Rule 1146.2

\*Savings amount based on lab testing conducted using MasterTemp 400® heater in conjunction with IntelliFlo® VSF Pump and Bypass Kit, which includes IntelliValve® controlled by heater. Test Conditions: Pump flow rate: 50gpm. Pump run time: 3000 hours/yr. Heater run time: 100 hours/yr. Electrical Cost: \$0.21 per kWh. System TDH: Heater and Bypass Kit added to Standardized "Curve C" System Curve performance data as per California Energy Commission Title 20 Appliance Efficiency Regulations. Test conditions assume pump flow rate of 50gpm and Constant Flow operation utilizing a lower motor RPM when flow is bypassing the heater due to lower system TDH. Actual performance and any subsequent energy consumption/savings are dependent upon various characteristics of the plumbing system, including but not limited to, pipe size, pipe lengths, filter type, fittings, system design, equipment run time/settings and more.

#### CALIFORNIA PROPOSITION 65 WARNING

⚠ **WARNING:** Cancer and Reproductive Harm.  
 ⚠ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.  
 ⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo.  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)





SEE PAGE 363 FOR REPLACEMENT PARTS



# MAX-E-THERM® (CONT'D)

## POOL AND SPA HEATER

### Dimensions and Performance

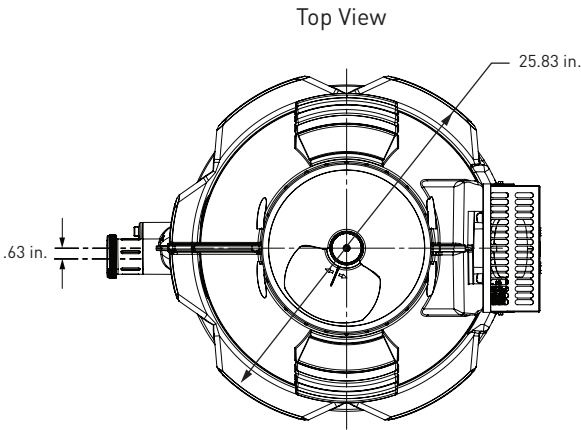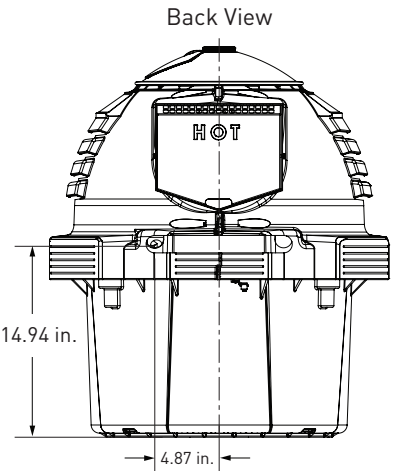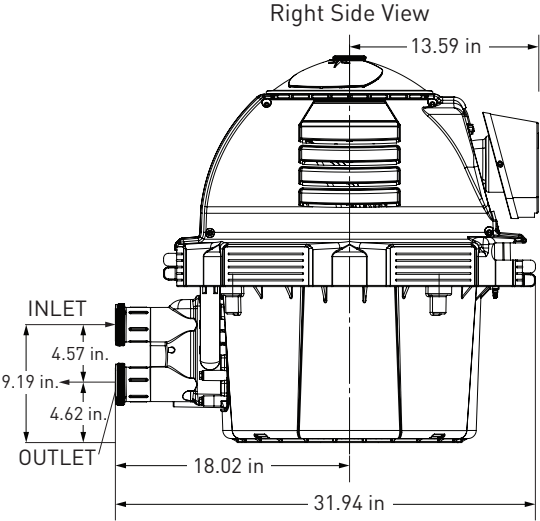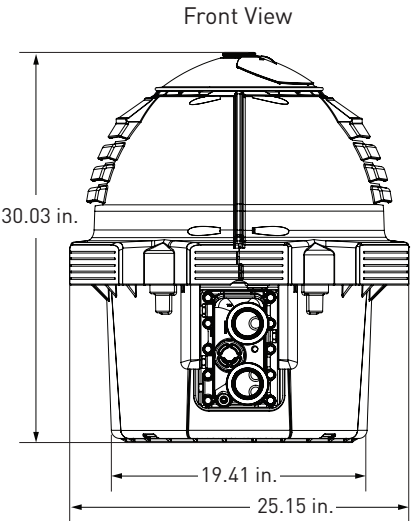

# MAX-E-THERM® AND MASTERTEMP® HEATER ACCESSORIES

## Featured Highlights

- 462048 optional Smart Heater Bypass valve control diverts water flow when the heater isn't needed

## Ordering Information

Product	Description	Approx. Ship. Weight (Lbs.)
VERTICAL VENTING - NEGATIVE PRESSURE		
77707-0076	4 in. x 6 in. Metal Flue Collar	3
77707-0077	4 in. x 8 in. Metal Flue Collar	3
HORIZONTAL OR VERTICAL VENTING - POSITIVE PRESSURE		
77707-0086	Appliance Adapter, Stainless Steel - Manufactured by HeatFab® venting manufactured by Selkirk Corp. <sup>2</sup>	3
77707-0087	Appliance Adapter, Stainless Steel - Manufactured by Z-Flex U.S. Venting	3
CONVERSION KITS - NATURAL GAS TO LPG		
461063	NG to LP Conversion Kit - Model 125	1
460794	NG to LP Conversion Kit - Model 175	1
77707-1461	Conversion Kit NG-LPG 200K for Pool and Spa Heater	1
460741	NG to Propane Conversion Kit - Model 250	1
460755	NG to Propane Conversion Kit - Model 300	1
77707-1451	Conversion Kit NG-LPG 333K for Pool and Spa Heater	1
77707-1441	Conversion Kit NG-LPG 400K for Pool and Spa Heater	1
CONVERSION KITS - LPG to NATURAL GAS		
461062	LP to NG Conversion Kit - Model 125	1
460795	LP to NG Conversion Kit - Model 175	1
77707-1431	Conversion Kit LPG-NG for 200K Pool and Spa Heater	1
460742	Propane to NG Conversion Kit - Model 250	1
460756	Propane to NG Conversion Kit - Model 300	1
77707-1421	Conversion Kit LPG-NG for 333K Pool and Spa Heater	1
77707-1411	Conversion Kit LPG-NG for 400K Pool and Spa Heater	1
HEATER ACCESSORIES		
42001-0085S	Heater Bolt Down Bracket Kit (Max-E-Therm)	1
460738	Heater Bolt Down Bracket Kit (MasterTemp)	1
PKG 188Z	Union Package (2" Unions)	1
474974	Union Package (1-1/2" Unions)	1
U11-197P	2 in. Adapter (for service loop)	1
461031	Direct Air Intake Duct Kit (MasterTemp)	5
475002	Direct Air Intake Duct Kit (Max-E-Therm)	5
474845	Direct Air Intake Duct Kit (MasterTemp 125)	5
SERVICE PROFESSIONAL PARTS KIT		
461100	Pro Service Package - Heater Master Package of Water & Electrical System Parts. Includes many common repair parts for Pentair & Sta-Rite heaters in reusable hard case <sup>1</sup>	5
461101	Pro Service Package - Heaters Electrical System Parts. Includes common Electrical System repair parts for Pentair & Sta-Rite heaters in reusable hard case <sup>1</sup>	3
461102	Pro Service Package - Heaters Water System Parts. Includes common Water System repair parts for Pentair & Sta-Rite heaters in reusable hard case <sup>1</sup>	3

<sup>1</sup> Compatible with Pentair MasterTemp® High Performance Heaters, Sta-Rite Max-E-Therm® High Performance Heaters, Models 175/200/250/300/333/400. Not compatible with 125,000 BTU heater

See Engineering Data pages 607–618 for information on selecting the proper size heater and for gas supply and pipe sizing information.

<sup>2</sup> HeatFab® is a registered trademark of Hart & Cooley, Inc.

## This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

# COMMERCIAL POWERMAX®

## HIGH PERFORMANCE ELECTRONIC IGNITION HEATER

### Featured Highlights

- Reliable operation in natural or propane models
- Fan-assisted and filtered combustion air
- Dual ignition systems for models greater than 750,000 BTU
- Built-in mixing system reduces condensation possibilities
- Fits through standard doorways
- Gas supply right or left side
- CSA Certified
- **All Heaters include CSD-1. Contact factory for part numbers**



Commercial PowerMax Heater

When performance is critical, the PowerMax Heater provides peak efficiency and easy maintenance in both indoor and outdoor applications. Seven sizes delivering up to 85% efficiency ratings\* and meeting all low NOx requirements.\*\* PowerMax Heater is designed for operation to 10,000 foot elevation.

#### CALIFORNIA PROPOSITION 65 WARNING

⚠ **WARNING:** Cancer and Reproductive Harm.  
 ⚠ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.  
 ⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo.  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

### Ordering Information

Product	BTUs (000's)	Installation	Gas Type	Pump System	Heat Exchanger	Carton Wt. (Lbs.)
COMMERCIAL POWERMAX NATURAL GAS MODELS						
PM0500NACC3PJN	500	Indoor/Outdoor	Natural	Pump Mounted	CuproNickel	495
PM0750NACC3PJN	750	Indoor/Outdoor	Natural	Pump Mounted	CuproNickel	575
PM1000NACC3PJN	1000	Indoor/Outdoor	Natural	Pump Mounted	CuproNickel	685
PM1250NACC3PJN	1250	Indoor/Outdoor	Natural	Pump Mounted	CuproNickel	730
PM1500NACC3PJN	1500	Indoor/Outdoor	Natural	Pump Mounted	CuproNickel	830
PM1750NACC3PJN	1750	Indoor/Outdoor	Natural	Pump Mounted	CuproNickel	880
PM2000NACC3PJN	2000	Indoor/Outdoor	Natural	Pump Mounted	CuproNickel	1025
COMMERCIAL POWERMAX PROPANE GAS MODELS						
PM0500PACC3PJN	500	Indoor/Outdoor	Propane	Pump Mounted	CuproNickel	495
PM0750PACC3PJN	750	Indoor/Outdoor	Propane	Pump Mounted	CuproNickel	575
PM1000PACC3PJN	1000	Indoor/Outdoor	Propane	Pump Mounted	CuproNickel	685
PM1250PACC3PJN	1250	Indoor/Outdoor	Propane	Pump Mounted	CuproNickel	730
PM1500PACC3PJN	1500	Indoor/Outdoor	Propane	Pump Mounted	CuproNickel	830
PM1750PACC3PJN	1750	Indoor/Outdoor	Propane	Pump Mounted	CuproNickel	880
PM2000PACC3PJN	2000	Indoor/Outdoor	Propane	Pump Mounted	CuproNickel	1025

\*Gas engine measures up to 85% thermal efficiency depending on size when tested per ANSI Z21.56:19/CSA 4.7:19 2019 section 5.10.


\*\*Certified by a third party test lab and communicated to SCAQMD for Rule 1146.2



# COMMERCIAL POWERMAX® (CONT'D)

## HIGH PERFORMANCE ELECTRONIC IGNITION HEATER

### Dimensions and Performance

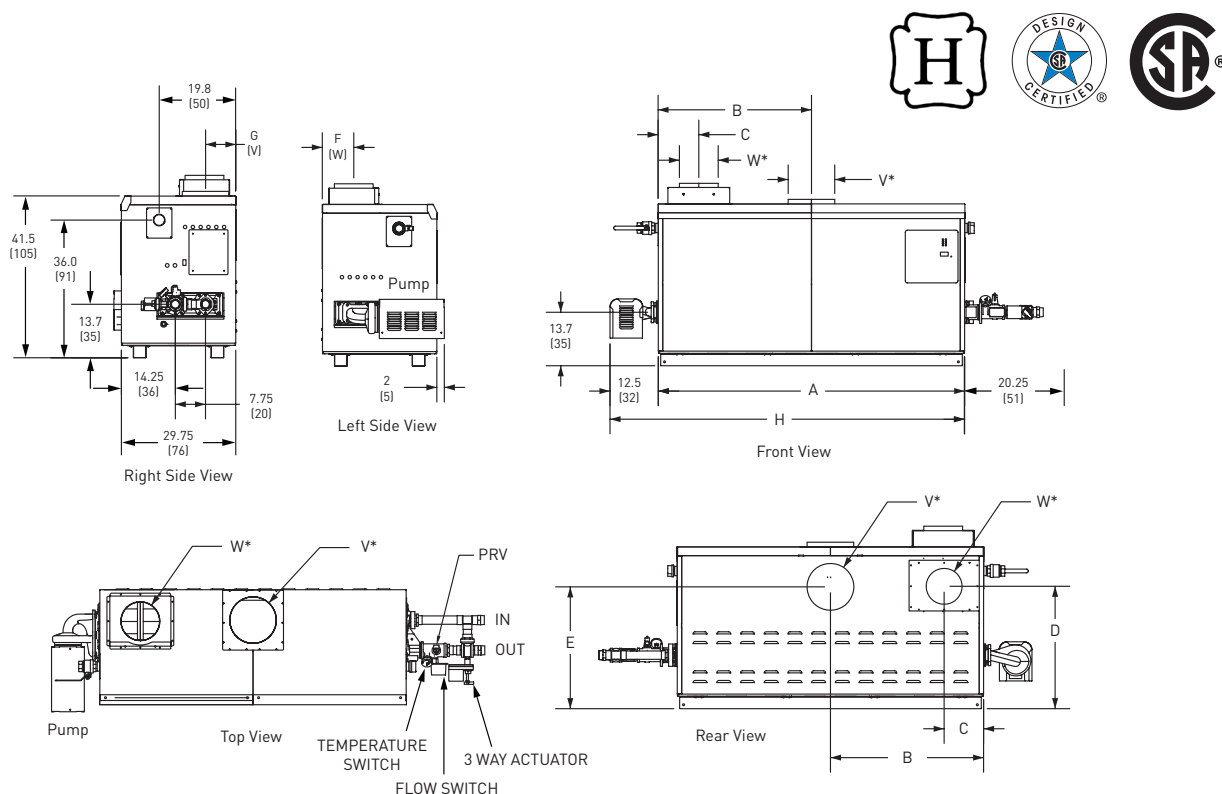

### Dimensional Data

Dimensions shown in inches, cm.

Size (000's)	A		B		C		D		E		F		G		H		Air Conn. W*		Vent Conn. V*		Horiz. Vent Pipe	
500	33½	85	15¾	40	5¾	15	29¾	76	32¾	83	7¾	20	8¾	22	46	117	6	15	8	15	6	15
750	45½	116	21¾	55	5¾	15	29¾	76	32¾	83	7¾	20	8¾	22	58	147	6	15	10	20	8	15
1000	57½	146	28¾	73	5¾	15	29¾	76	32¾	83	7¾	20	7	18	70	178	8	20	10	25	8	20
1250	68	172	34	86	10¼	26	30¾	78	29½	75	8¾	22	8¾	22	80	203	8	20	12	30	8	20
1500	78½	199	39¾	101	10¼	26	30¾	78	29½	75	8¾	22	8¾	22	91	231	8	20	12	30	8	20
1750	89	226	44½	113	10¼	26	30¾	78	29½	75	8¾	22	8¾	22	101	256	8	20	14	36	8	20
2000	99½	253	49¾	126	10¼	26	30¾	78	29½	75	8¾	22	8¾	22	112	284	12	30	14	36	12	30

\*Air and vent connections may be on top or back of the PowerMax, and are field convertible.

### Sizing Data

Indoor Model	Input <sup>1</sup> BTU/h x1000	Output <sup>1</sup> BTU/h x1000	Gas Conn. Size inches <sup>2</sup>	Heater Water Conn. Size inches <sup>2</sup>	Mixing System Water Conn. Size inches <sup>2</sup>	Shipping Weight	
						lbs.	kg
500	500	425	1¼	2	2	495	225
750	750	638	1¼	2	2	575	261
1000	999	849	1½	2½	2	685	311
1250	1250	1063	2	2½	2	730	331
1500	1500	1275	2	2½	2	830	377
1750	1750	1488	2	2½	2	880	400
2000	1999	1699	2	2½	2	1025	465

NOTES: 1. Input and output must be derated 2% per 1000 feet above sea level when installed above 2000 feet altitude.

2. Dimensions are nominal.

Note: Contact factory at 1-800-831-7133 for replacement parts.

# COMMERCIAL MEGATHERM®

## HIGH PERFORMANCE ELECTRONIC IGNITION HEATER

### Featured Highlights

- Electronic ignition
- Built-in draft diverter (indoor models) simplifies installation
- Integral pump assures proper water flow (models 500-1825)
- High temperature refractory firebox liner to 2000° F
- Easy-to-service header flanges
- Corrosion-resistant glass-lined headers
- CSA Certified
- **All Heaters include CSD-1. Contact factory for part numbers**
- Start-up service by an authorized representative is strongly recommended before regular operation



Commercial  
MegaTherm  
Heater

#### CALIFORNIA PROPOSITION 65 WARNING


⚠ **WARNING:** Cancer and Reproductive Harm.  
⚠ **AVERTISSEMENT:** Peut Causer le Cancer  
et des Dommages au Système Reproducteur.  
⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo.  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov) PB20071A

MegaTherm Pool Heaters are designed for commercial, institutional and large residential pools where economical performance and rapid heat-up are required. Available in indoor and outdoor models in both natural and propane. MegaTherm is design verified to the ANSI Z21.56 Standard for Gas-Fired Pool Heaters (Outdoor 5---1825 units are certified for use without the addition of a draft diverter or external vent. Indoor units incorporate a built-in draft diverter and require vent piping only.)

### Ordering Information

Product	BTUs (000's)	Installation	Gas Type	Pump System	Heat Exchanger	Carton Wt. (Lbs.)
COMMERCIAL MEGATHERM NATURAL GAS MODELS						
MT2200IN09CBPNJX	2200	Indoor	Natural	Pump Mounted	CuproNickel	1950
MT2800IN09CBPNJX	2800	Indoor	Natural	Pump Mounted	CuproNickel	2100
MT3200IN09CBPNJX	3200	Indoor	Natural	Pump Mounted	CuproNickel	2250
MT3600IN09CBPNJX	3600	Indoor	Natural	Pump Mounted	CuproNickel	2510
MT4000IN09CBPNJX	4000	Indoor	Natural	Pump Mounted	CuproNickel	2750
MT4500IN09CBPNJX	4500	Indoor	Natural	Pump Mounted	CuproNickel	2900
MT2200EN09CBPNJX	2200	Outdoor	Natural	Pump Mounted	CuproNickel	2320
MT2800EN09CBPNJX	2800	Outdoor	Natural	Pump Mounted	CuproNickel	2500
MT3200EN09CBPNJX	3200	Outdoor	Natural	Pump Mounted	CuproNickel	2840
MT3600EN09CBPNJX	3600	Outdoor	Natural	Pump Mounted	CuproNickel	3175
MT4000EN09CBPNJX	4000	Outdoor	Natural	Pump Mounted	CuproNickel	3940
MT4500EN09CBPNJX	4500	Outdoor	Natural	Pump Mounted	CuproNickel	3790

### Dimensions and Performance

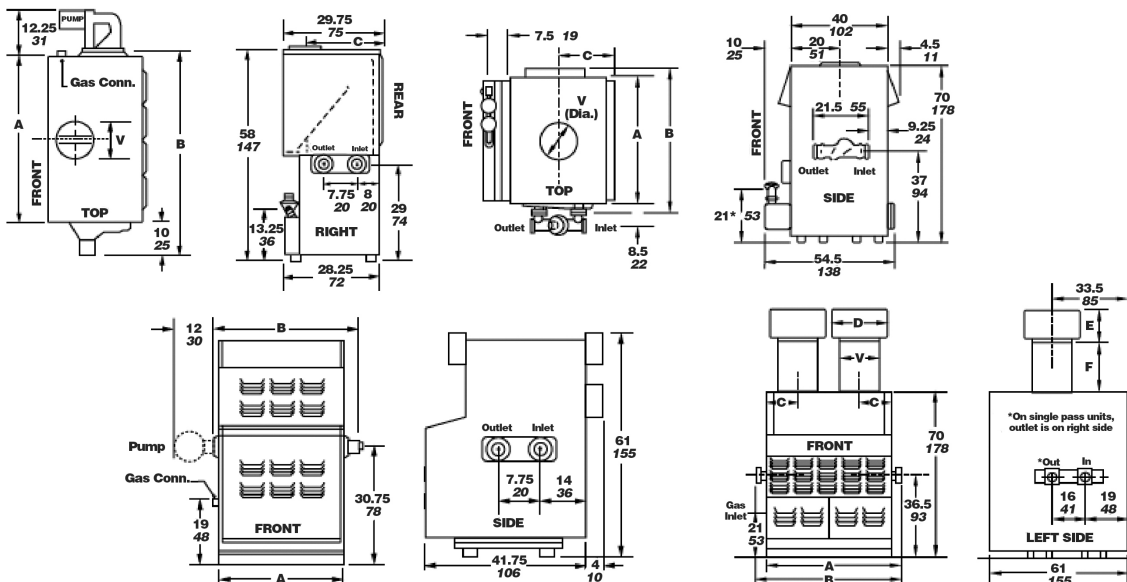

# ULTRATEMP® HEAT PUMP

## HIGH PERFORMANCE HEAT PUMP

TRADEGRADE

### Featured Highlights

- 100% titanium heat exchanger assures corrosion-resistant performance for extra long life
- LCD control board displays an intuitive menu-driven read out with easy to follow full word messages; no more codes
- Automatic defrost feature senses refrigerant temperature and prevents freezing, allowing the heat pump to operate at even lower temperatures
- Compatible with ALL automated control packages
- Long-life corrosion resistant plastic composite cabinet stands up to severe climates and pool chemicals
- ETL certified safe for operation
- Thermostatic Expansion Valve (TXV) controls refrigerant flow for optimum efficiency and BTU output over a wider operating range
- High efficiency, meets or exceeds existing codes and standards
- BTU and efficiency performance independently certified by the Air-Conditioning, Heating and Refrigeration Institute, AHRI



UltraTemp 120Q Heat Pump


UltraTemp Heat Pumps are manufactured with non-ozone depleting R410 refrigerant.

### Ordering Information

Part #		Model	80/80/80* BTU/COP	80/63/80* BTU/COP	50/63/80* BTU/COP	Freq (Hz)	Breaker Size (amp)	Phase	Volt	Ctn Qty.	Ctn Wt.	"A" Dim
BLACK	ALMOND											
ULTRATEMP HEAT PUMPS												
460962	460932	110	110,000/6.1	101,000/5.8	70,000/4.0	60	50	1	230	1	271	45.5
460863	460833	120Q	127,000/5.7	120,000/5.5	80,000/4.0	60	50	1	230	1	270	48.1
460964	460934	140	145,000/5.8	135,000/5.6	90,000/4.0	60	50	1	230	1	335	45.5
460965	460935	120 H/C	125,000 Heat/5.5 71,000 Cool/4.1	118,000/5.3	80,000/4.0	60	50	1	230	1	283	45.5
460959	460958	140 H/C	140,000 Heat/5.6 71,000 Cool/4.1	132,000/5.4	85,000/4.0	60	50	1	230	1	344	45.5
-	460928	140C	140,000/5.7	130,000/5.5	85,000/4.0	50	50	3	230	1	335	45.5
-	460932	140 H/C	110,000/6.1	101,000/5.8	70,000/4.0	60	50	1	230	1	271	45.5

\*Rating in accordance with AHRI Standard 1160  
(air temp. °F. / % relative humidity / water temp °F.)

### Dimensions and Performance

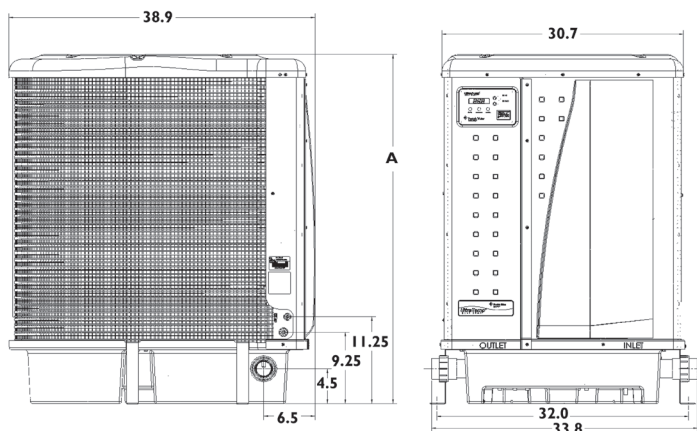

CALIFORNIA PROPOSITION 65 WARNING  
 ⚠ WARNING: Cancer and Reproductive Harm.  
 ⚠ AVERTISSEMENT: Peut Causer le Cancer  
 et des Dommages au Système Reproducteur.  
 ⚠ ADVERTENCIA: Cáncer y Daño Reproductivo.  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov) PR 201714



The AHRI Certified® Mark is applied only to HVACR equipment and components that have been independently tested to certify manufacturers' performance claims are accurate. Visit [www.ahridirectory.org](http://www.ahridirectory.org) for a complete list of certified products.

CEC indicates that Heat Pump has been evaluated to California Title-20, listed in the California Energy Commission's (CEC) database of compliant heat pumps, and certified to use on Residential Swimming Pool Filtration Systems.