



SYSTEM:2™ MOD MEDIA™

# SYSTEM:2™ MOD MEDIA™

## FILTERS—PLM SERIES

### Greater dirt-loading capacity reduces maintenance

The System:2 Mod Media filter is ideal for small inground and aboveground pools. This filter is a compact adaptation of System 3® filter technology from Sta-Rite, so it handles dirt loads up to 15 times greater than sand filters of equivalent size. The result: You capture more dirt between cleanings and minimize time on maintenance.

- Balanced-flow tank design works in unison with the high-capacity filter module to collect dirt over its entire surface—holds more dirt so you clean less often.
- Less frequent cleaning also increases filter module service life and lowers lifetime costs.
- Rugged composite construction resists corrosion and weathering.
- Compact design fits in tight installations and can be easily shielded from view.



PENTAIR.COM



TRADEGRADE

**SYSTEM:2™ MOD MEDIA™**

# Easy to clean—just spray and go




The Mod Media filter contains a one-piece module that simply drops into an easily accessible tank. When cleaning is necessary, just remove the lid (no tools are necessary) and spray-rinse the module while it is still in place.\* It only takes minutes to thoroughly clean the filter and get back into service— fast.



Less maintenance...YES!  
The balanced-flow tank design directs water through both sides of the filter module, which increases dirt-loading without clogging. Holding more dirt means a longer time between cleanings.

\*Modules used in conjunction with certain pool/spa sanitizers may require soaking in special cleaning solutions

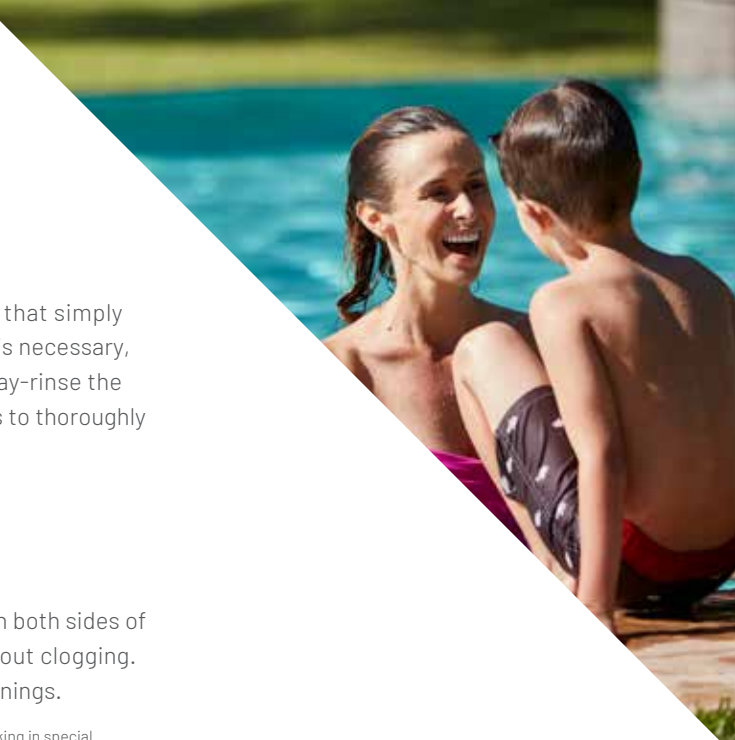

## FILTER PERFORMANCE

Model	For Pools up to 8 Hr. Turnover (Gal.)	Filter Area (Sq. Ft.)	Flow Rate <sup>1</sup> (GPM)
PLM100	48,000	100	38-100
PLM125	60,000	125	47-125
PLM150	72,000	150	56-150
PLM175	72,000	175	66-150
PLM200	72,000	200	75-150
PLM300	72,000	300	113-150

<sup>1</sup>Based on NSF-recommended flow rate for commercial at 0.375 GPM per square foot.

Operating Limits —Maximum continual operating pressure is 50 psi. For pool/spa (bather) applications, the maximum operating water temperature within the filter is 104°F (40°C).



Top-mounted pressure gauge and information panels are positioned for easy reading

Split-tank design permits simple, thorough, rinse-in-place cleaning to save time

Posi-Ring closure is easy to secure, lasts for years

Balanced-flow tank hydraulics direct water through each side of the filter module for uniform dirt loading to prevent clogging and maximize filtration effectiveness



The System: 2 Mod Media filter earned the Eco Select® brand distinction as one of the greenest and most efficient choices from Pentair.

## TRADEGRADE

The TradeGrade family of products is exclusively made for and sold by the world's most demanding pool professionals.

400 Regency Forest Dr | Cary, NC 27518 | United States | 800.831.7133 | pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2021 Pentair. All rights reserved. Pentair.com

P1-73111/21