

INTELLICHLOR® AND ICHLOR® FLOW-TEMPERATURE SWITCH REPLACEMENT KIT



INSTALLATION GUIDE

IMPORTANT SAFETY INSTRUCTIONS
READ AND FOLLOW ALL INSTRUCTIONS
SAVE THESE INSTRUCTIONS

Technical Support

Phone: (800) 831-7133

(8 AM to 8 PM (ET) - (8 AM to 5 PM (PT)

Fax: (800) 284-4151

Web site: www.pentair.com

Related Manuals

IntelliChlor User's Guide (P/N 520589)

iChlor Installation and User's Guide (P/N 522709)

IntelliChlor Flow-Temperature Switch Replacement Kit (P/N 520736) / iChlor Flow-Temperature Switch Replacement Kit (P/N 523100)


Replacement kit includes:


- Flow-Temperature Switch Assembly
- Watertight Splice Connectors (Qty. 4)

Removing the Existing Flow-Temperature Switch

- 1. Turn OFF power to the pool pump and Salt Chlorine Generator cell before starting.
- 2. Remove the flow-temperature switch cover from the cell. See **Figure 1**.

Note: Do NOT discard the switch cover; it will be reinstalled after installation of the new switch assembly.





 Using a 1-3/16" (30 mm) adjustable wrench, carefully unscrew the flowtemperature switch assembly until the switch can be removed from the cell.

Note: Be careful not to damage the cell plastic coupling with the edge of the wrench.



Figure 1

Cut

wire

Cut

wire



Figure 2

6. Unscrew nut counterclockwise to remove flow-temperature switch assembly. See **Figure 3**.

Unscrew nut counterclockwise to remove flowtemperature switch assembly



Figure 3

Installing the New Flow-Temperature Switch

- 1. Insert the new flow-temperature switch into threaded hole in the cell and hand tighten as much as possible.
- Using a flat 1-3/16" (30 mm) wrench, carefully tighten the new flow-temperature switch assembly one or two turns past hand tight.
 Ensure arrows on the top of the switch nut are pointing in the flow direction and the center arrow is aligned in the center position as shown in Figure 4.
- 3. Strip back the cable that was cut from the unit.

Note: Do NOT strip the individual wires.

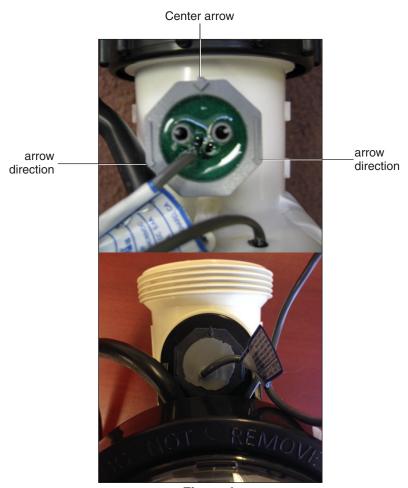


Figure 4

 Insert the RED switch-side wire into one side of a provided splice connector. Insert the RED cell-side wire into the other side of the same connector.

Ensure both wires are fully inserted into the connector and then crimp using pliers. See **Figure 5**.

- 5. Repeat Step 3 for the **WHITE** and **BLACK** wires as shown below in **Figure 5**.
- 6. Insert the **GREEN** cell-side wire into one end of the final splice connector and crimp using pliers. See **Figure 5**.

Note: Flow-temperature switches manufactured before September 2018 will feature a grey cable containing a GREEN and WHITE wire. Insert these two wires into the same side of a splice connector and crimp using pliers. **These switches are not compatible with cells manufactured after September 2018.**



Figure 5

- 7. Wrap the excess wire around the flow-temperature switch.
- 8. Replace the switch cover. See **Figure 6**.
- 9. The Salt Chlorine Generator is now ready for operation.
- 10. Return power to the pool pump and the Salt Chlorine Generator cell.



Figure 6

NOTES

NOTES



1620 HAWKINS AVE., SANFORD, NC 27330 • (919) 566-8000 10951 WEST LOS ANGELES AVE., MOORPARK, CA 93021 • (805) 553-5000

WWW.PENTAIR.COM

All Pentair trademarks and logos are owned by Pentair, plc or by one of its global affiliates. IntelliChlor® and iChlor® are trademarks and/or registered trademarks of Pentair Water Pool and Spa, Inc. and/or its affiliated companies in the United States and/ or other countries. Unless expressly noted, names and brands of third parties that may be used in this document are not used to indicate an affiliation or endorsement between the owners of these names and brands and Pentair Water Pool and Spa, Inc. Those names and brands may be the trademarks or registered trademarks of those third parties. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

© 2019 Pentair Water Pool and Spa, Inc. All rights reserved. This document is subject to change without notice.



P/N 520737 REV. G 10/18/19