



POWER PACK REPLACEMENT KIT

FOR iCHLOR® 15 SALT CHLORINE GENERATORS

This document provides install instructions for the iChlor® 15 Salt Chlorine Generator power pack. Refer to your iChlor Installation and User's Guide for system specifications, wiring instructions and additional information regarding your salt chlorine generator. If you no longer have the iChlor Installation and User's Guide, a copy may be downloaded from www.pentair.com.

Connecting the New Power Pack to iChlor



WARNING Switch OFF all power to the iChlor and power pack at the circuit breaker before servicing the unit.

1. Ensure all power to the iChlor cell and power pack has been turned OFF at the circuit breaker.
Note: Refer to the iChlor Installation and User's Guide to determine whether your installation requires a GFCI-protected outlet.
2. Unplug the old power pack from its outlet.
3. Unfasten the iChlor cell cable from the old power pack, dismount (if mounted) and remove the old power pack.
4. If mounting the new power pack, mount to a vertical surface within 15 ft. (4.6 m) of the iChlor cell.
5. Align the cell cable connector with the power pack Cell Connection (**Figure 1**) and insert the cell cable. Firmly fasten the cell cable to the power pack.
6. Plug the power pack into the appropriate outlet.
7. Return power to the power pack and cell at the circuit breaker.

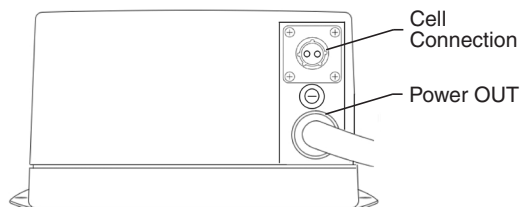


Figure 1: Power Pack Connections