



Complete Jet & Tank System



Ideal for Compact Installations

Where space is at a premium

Superior Performance

At depths to water of 25' or less

19-Gallon Pressure Tank, Precharged to 25 PSI

Corrosion-resistant, heavy-gauge steel construction with baked-on finish

Fiberglass-Reinforced Thermoplastic Pump Housing

For the highest corrosion and sand-abrasion resistance

Heavy-Duty Dual-Voltage Motor

Preset at 230V

Built-In Check Valve


3/4 HP 10 GPM
FP2521

PERFORMANCE (GPM)					MAX PRESSURE SHUTOFF	SUCTION SIZE	DISCHARGE SIZE	VOLTAGE	PRESSURE SWITCH	
DEPTH TO WATER	5'	10'	15'	20'					ON	OFF
FP2521	10.2	8.7	7.6	5.8	70 PSI	1-1/4"	1"	115/230	30	50

All performances shown in gallons per minute at 40 PSI discharge pressure.

WARRANTY	UPC	CARTON DIMENSIONS	PALLET QTY.	WEIGHT
1 YEAR	022315381544	44.25" x 17.25" x 33"	2	78 LBS.

Includes: Factory-installed 30/50 preset pressure switch, detailed owner's manual

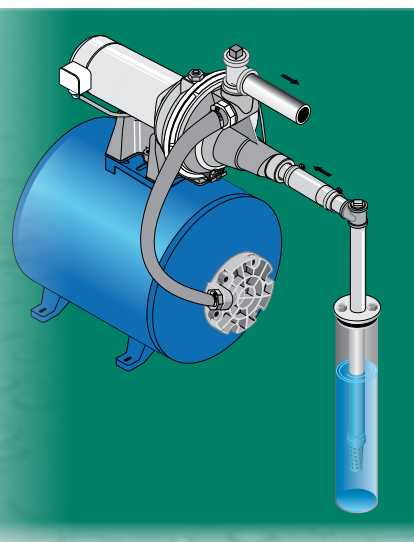

293 Wright Street, Delavan, WI 53115
For Questions or Installation Instructions:
www.flotecwater.com 1-800-365-6832