




SHALLOW WELL JET PUMPS



MODEL 2210C 1 HP
MODEL 2207C 3/4 HP
MODEL 2205C 1/2 HP

- Reliable performance to depths of water 25' or less
- Rugged cast iron construction maximizes pump life
- Heavy-duty dual-voltage motor 1/2 HP preset at 115 V; 3/4 HP and 1 HP are preset at 230V
- Pre-wired pressure switch preset for 30/50 PSI operation
- Self priming after pump housing is initially filled . Check valve or foot valve required.

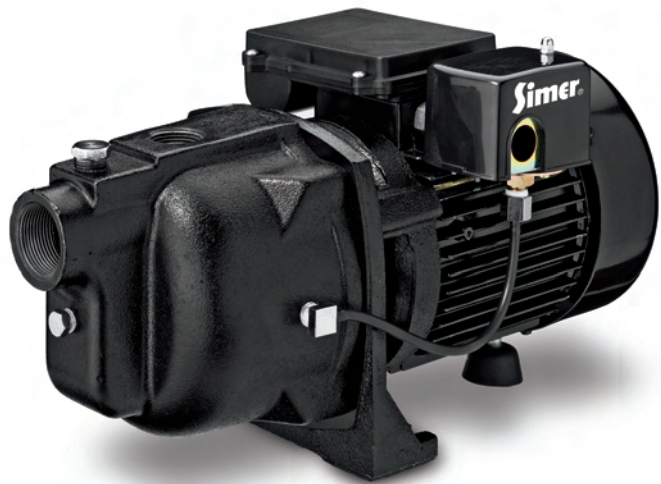

PERFORMANCE

| Model | HP | Warranty | Voltage | Amps | Pressure Switch | | GPM Pumped at Different Depths to Water* | | | | | | Pressure Shut-off |
|-------|-----|----------|---------|----------|-----------------|-----|--|-----|-----|-----|-----|-----|-------------------|
| | | | | | On | Off | 0' | 5' | 10' | 15' | 20' | 25' | |
| 2210C | 1 | 1-year | 115/230 | 12.0/6.0 | 30 | 50 | 21 | 20 | 18 | 16 | 13 | 9 | 70 PSI |
| 2207C | 3/4 | 1-year | 115/230 | 11.0/5.5 | 30 | 50 | 19 | 16 | 14 | 13 | 11 | 7 | 67 PSI |
| 2205C | 1/2 | 1-year | 115/230 | 8.5/4.2 | 30 | 50 | 8.5 | 7.5 | 6.5 | 6 | 5 | 3.5 | 65 PSI |

*All performances shown in gallons per minute at 40 PSI (pound per square inch) discharge pressure at top of well.

ORDERING INFORMATION

| Model | UPC | Carton (L x W x H) | Cube | Pallet Qty. | Weight |
|-------|-----------------|----------------------|-------|-------------|---------|
| 2210C | 0 22315 36160 7 | 19" x 10.82" x 10.5" | 1.249 | 24 | 53 lbs. |
| 2207C | 0 22315 36159 1 | 19" x 10.82" x 10.5" | 1.249 | 24 | 45 lbs. |
| 2205C | 0 22315 36158 4 | 19" x 10.82" x 10.5" | 1.249 | 24 | 38 lbs. |