

# SHURFLO® LIVEWELL FILL VALVE

## INSTALLATION & OPERATION INSTRUCTIONS

1-1/8" BARB - MODEL: OEM: 330-000 / AM: 330-001

3/4" BARB - MODEL: OEM: 330-010 / AM: 330-011

### FEATURES


- Adjustable flow - 1/2 Turn
- Side Mount
- Nylon Construction
- 1-1/8" & 3/4" Elbow fittings
- Multi-directional
- Low Profile Design
- High Flow Capacity
- 3 Year Warranty

### TOOLS FOR INSTALLATION

- Hose clamp suitable for 3/4" or 1-1/8" depending on model.
- Nut driver or flat blade screw driver suitable for the hose clamp.
- Large pair of channel locks, pliers or crescent wrench.
- 1-3/4" Hole Saw.

### MOUNTING INSTRUCTIONS

1. Select and mark the location for the housing outlet.
2. Make a 1-3/4 inch hole at the location selected.
3. Remove swivel nut (#9) and mounting nut (#7) from assembly.
4. Place the housing assembly (#1, #2 #3, #4, #5, #6 and #8) through the hole from inside the tank ensuring the barb fitting is outside the livewell tank.
5. Thread the mounting nut (#7) onto the housing inlet (#4) from outside of the tank. Hand tighten then, 1/4 turn with wrench.
6. Thread the swivel nut (#9) (hand tighten) onto the housing inlet (#4).
7. Secure hose with suitable hose clamps.
8. Turn pump on and check for leaks.

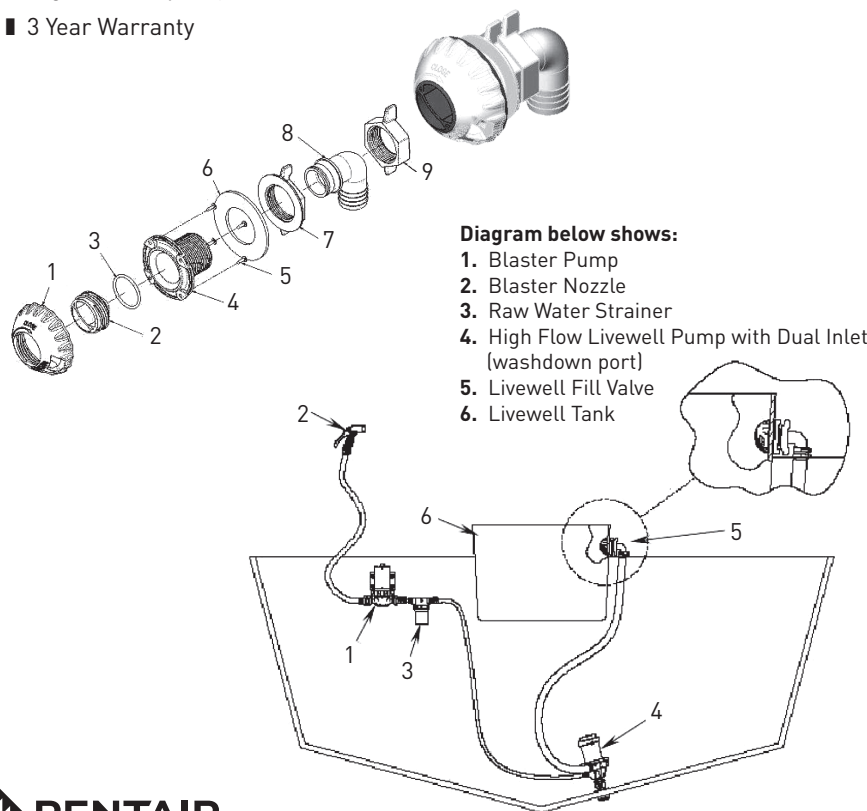

### WARNING

**Do NOT operate equipment that requires 110/220 AC power while boat is in water or during installation of the SHURFLO Livewell Fill Valve.**