



SUBMERSIBLE WELL PUMPS


MODELS 2860G, 2855G, 2850G, 2845G

2-WIRE 4" SUBMERSIBLE WELL PUMPS



MODEL 2860G	230 VOLT	1 HP	10 GPM
MODEL 2855G	230 VOLT	3/4 HP	10 GPM
MODEL 2850G	230 VOLT	1/2 HP	10 GPM
MODEL 2845G	115 VOLT	1/2 HP	10 GPM

- High capacity heavy duty design. High-impact discharge head and base. Strong stainless-steel shell on pump end and motor
- 10 GPM rated models for maximum efficiency in most homes
- 1-1/4" corrosion-resistant thermoplastic discharge head outlives conventional metals even in the harshest environments
- Built-in check valve to prevent back flow
- High-efficiency motor for fewer energy dollars
- NEMA-standard motor
- Complete installation instructions included
- All units are built with a green ground wire per National Electric Code specifications for ground protection
- Fits inside any 4" opening

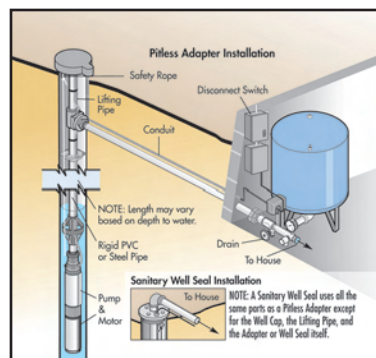

PERFORMANCE

Model	HP	Warranty	GPM	Voltage	GPM Pumped at Different Depths to Water*								
					20'	40'	60'	80'	100'	150'	200'	250'	300'
2860G	1	3-year	10	230	15.8	15.4	14.7	14	13.4	11.7	9.7	7.3	4.4
2855G	3/4	3-year	10	230	14.8	14.2	13.4	12.6	11.7	8.8	5.2	—	—
2850G	1/2	3-year	10	230	14.3	13.2	12.2	10.9	9.6	5	—	—	—
2845G	1/2	3-year	10	115	14.3	13.2	12.2	10.9	9.6	5	—	—	—

*All performances shown in gallons per minute at 40 PSI (pound per square inch) discharge pressure at top of well.

ORDERING INFORMATION

Model	UPC	Carton (L x W x H)	Cube	Pallet Qty.	Weight
2860G	0 22315 31273 9	34.8" x 4.4" x 4.2"	.372	44	27 lbs.
2855G	0 22315 31271 5	34.8" x 4.4" x 4.2"	.372	44	29 lbs.
2850G	0 22315 31268 5	34.8" x 4.4" x 4.2"	.372	44	26.3 lbs.
2845G	0 22315 31267 8	34.8" x 4.4" x 4.2"	.372	44	21 lbs.