


# AURORA® FIRE PUMPS

## STANDARD FIRE PUMP ACCESSORIES

Date **May 2018**

Supersedes Section 916 Page 201

Dated September 2013

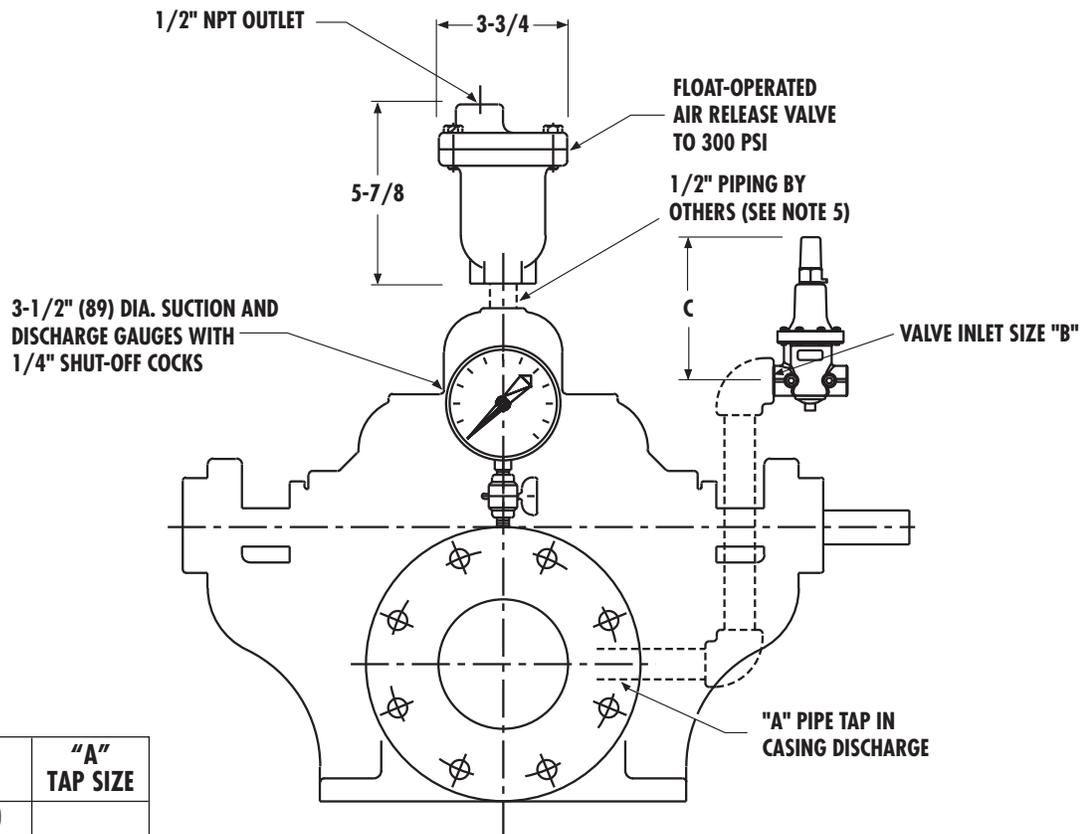

PIPE SIZE	"A" TAP SIZE
2-1/2-481-10	1-1/4"
3-481-10	
4-481-11	
4-481-15	
5-481-11	
5-481-15/A	
5-481-17	
6-481-11	
6-481-11HH	
6-481-14HH	
6-481-15	
6-481-18	
6-481-20	
8-481-12	
8-481-21	
8-481-24	
10-481-15	3/4"
10-481-18D	
8-481-17	
10-481-18	
12-481-18	
ALL VERTICAL (483) MODELS	1-1/4"
ALL 2-STAGE (485) MODELS	
490 MODELS	3/4"

### CASING RELIEF VALVE

SYSTEM GPM	VALVE INLET SIZE - "B"	"C"	
		175 psi	300 psi
250	3/4"	6-3/4" (131)	9-1/4" (235)
500			
750			
1000			
1250			
1500	1"	8-1/2" (216)	
2000			
2500			
3000			
3500			
4000			

#### NOTES:

1. Dimensions are in inches (mm) and may vary  $\pm 1/4"$  (6).
2. Accessories shown are shipped loose for field installation.
3. Casing relief valve is to be adjusted to appropriate pressure upon field installation.
4. Casing relief valve is furnished on electric motor driven units only.
5. Two stage pumps require both vent taps piped to air release valve.
6. Suction gauge range is 30"-0-150 PSI (FM Approved) for suction pressures up to 75 PSI, or 30"-0-300 PSI for suction pressures over 75 PSI.
7. Discharge gauge range is 0-300 PSI for pumps with rated discharge pressures up to 150 PSI, or 0-600 PSI for pumps with rated discharge pressures over 150 PSI (UL Listed and FM Approved).