



Series Name: B5EX\_BH

Pump Size: 5 x 6 x 15 BH

Department of Energy Requirements	
PEI <sub>CL</sub>	0.97
Model	B5EXBH
Imp. Dia. (in.)	15.00

Available Configurations	
CCMD	B5EXPBH
Frame	
SAE	B5EXQBHS

Curve Conditions	
Nominal RPM	1770
Maximum Working Pressure	266 PSI (18 BAR)
Based on Fresh Water @ F	68 (20 C)

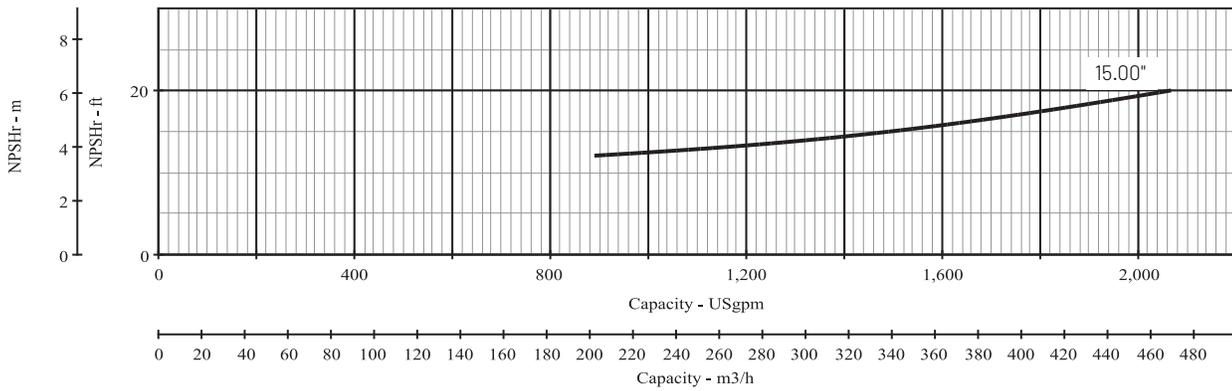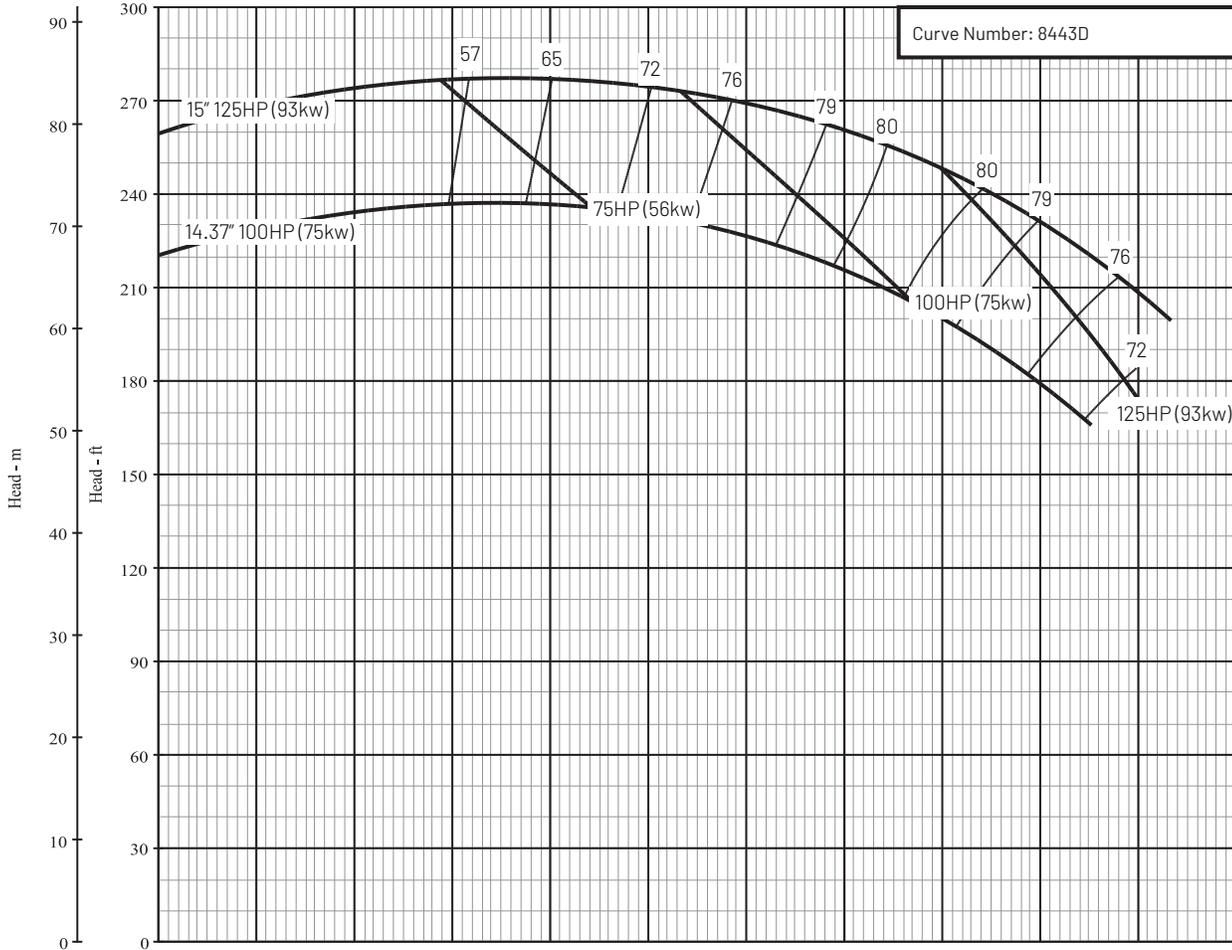



Series Name: B5EX\_BH

Pump Size: 5 x 6 x 15 BH

Department of Energy Requirements	
PE <sub>lcl</sub>	0.97
Model	B5EXBH
Imp. Dia. (in.)	15.00

Available Configurations	
CCMD	B5EXPBH
Frame	
SAE	B5EXQBHS

Curve Conditions	
Nominal RPM	VARIOUS
Maximum Working Pressure	266 PSI (18 BAR)
Based on Fresh Water @ F	68 (20 C)

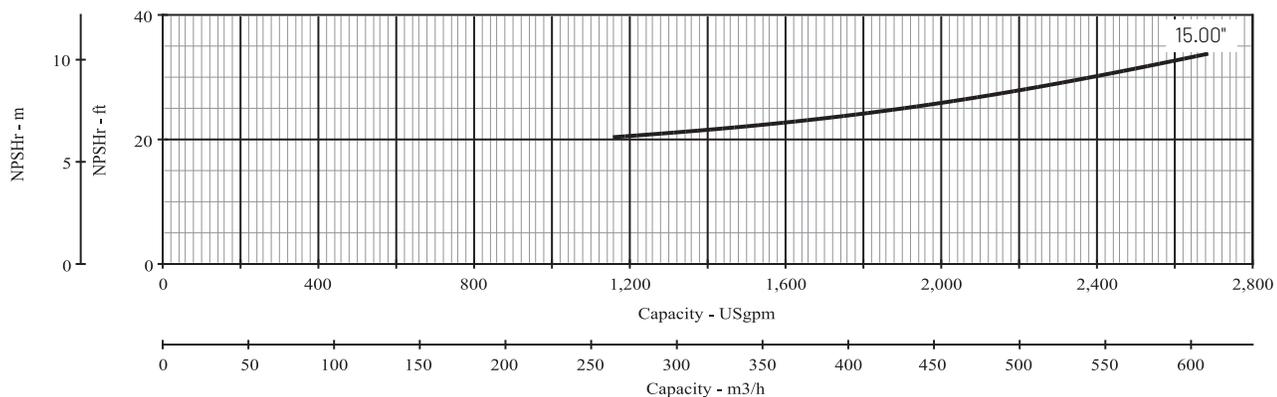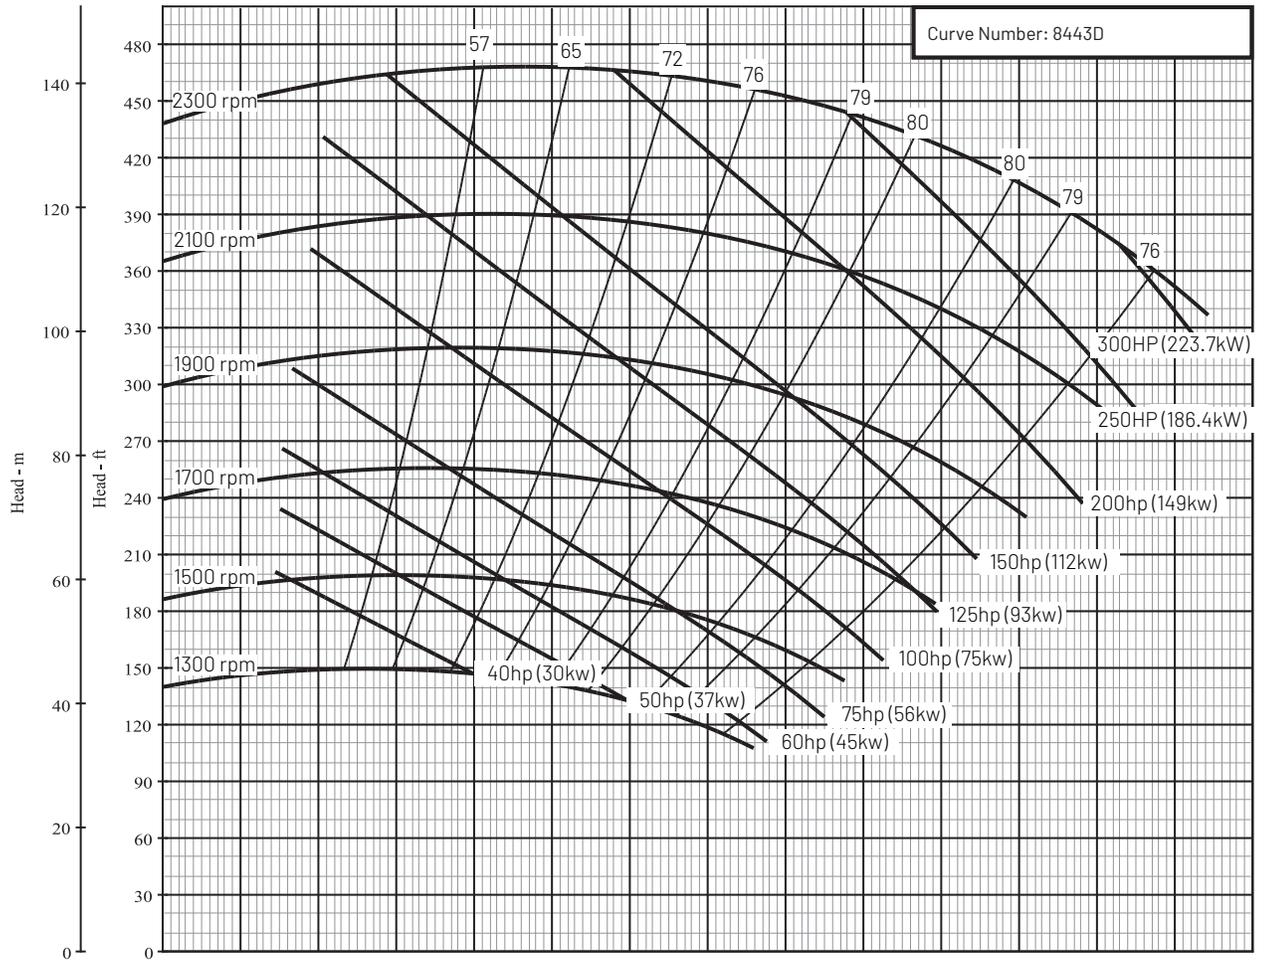

This product as sold in U.S. is regulated by 10 CFR Parts 429 and 431.

293 Wright Street | Delavan | WI 53115 | [www.BerkeleyPumps.com](http://www.BerkeleyPumps.com)

For a detailed list of where Pentair trademarks are registered, please visit [www.pentair.com/en/registrations.html](http://www.pentair.com/en/registrations.html). Pentair trademarks and logos are owned by Pentair PLC, or its affiliates. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer. BK13096 DOE (2/15/20) © 2020 Pentair plc. All Rights Reserved.