

BERKELEY® DMC Series Multi-Stage Centrifugal Pump



The DMC Multi-Stage Centrifugal Pump offers heads to 175 feet and capacities to 50 GPM. Designed for the professional with heavy-duty cast iron pump case and seal plates and diffuser with Noryl® impellers for years of proven service. Available in 2 HP model.

APPLICATIONS

- Residential Lawn Sprinkling
- Turf Irrigation
- Heat Pumps
- Water Transfer

SPECIFICATIONS

Pump Case – Cast iron

Diffuser – Reinforced polypropylene

Impeller – Noryl®

Mechanical Shaft Seal, Type 6 – Buna-N, Carbon, Ceramic, 18-8 stainless steel

Mounting Base – Steel

FEATURES

Rugged Construction – Heavy-duty cast iron pump case and seal-plate
Drain Port – Provided for easy winterization

Easy Serviceability – Normal wearing parts are easily accessible for service and replacement, without disturbing piping

Heavy-Duty Motors – Designed for continuous operation.

ORDERING INFORMATION


Catalog Number	HP	Suction	Pump/Motor Unit		Shallow Well Adapter	
			Discharge	Length	Approx. Wt. Lbs.	Approx. Wt. Lbs.
SINGLE PHASE – 115/230V*						
BDMC-2-200	2*	1-1/4"	1"	20-7/8"	63	3
DMC SWITCH KIT – SK75						
Catalog Number				Approx. Wt. Lbs.		
66632				2		

*2 HP available 230V only.

Noryl® is a registered trademark of General Electric Co.
 All other brand or product names are trademarks or registered marks of Pentair Ltd.

BERKELEY® DMC Series Multi-Stage Centrifugal Pump

PUMP PERFORMANCE

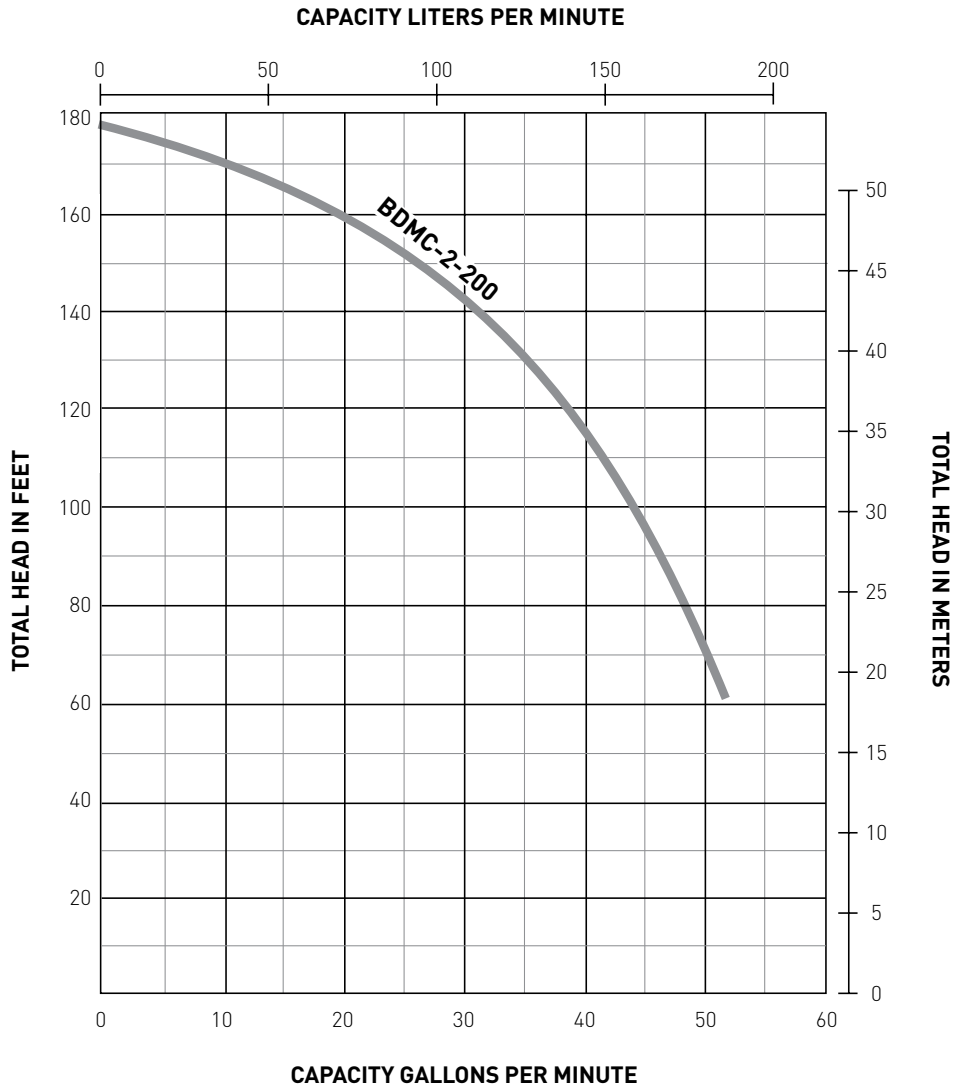

Catalog Number	HP	Discharge Pressure PSI	Depth to Water in Feet				
			5'	10'	15'	20'	25'
BDMC-2-200	2	30	49	48	47	46	45
		40	44	43	42	40	39
		50	38	36	35	33	31
		60	30	27	24	21	15

Pumping capacities in gallons per minute at indicated discharge pressures in pounds per square inch.

