




HORIZONTAL DRY PIT ANGLEFLOW PUMPS

E5721 SERIES





POSITIONS #1 OR #9 ARE STANDARD WHEN VIEWED FROM THE DRIVER END UNLESS OTHERWISE SPECIFIED. CLOCKWISE ROTATION DISCHARGE POSITION #1 SHOWN

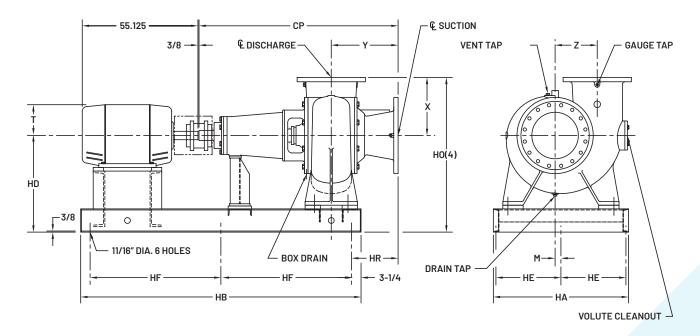

PUMP	FRAME		SUCT	DISCH	м	x	Y	7	CP	НА	НВ	HD	HE	HF	но	HR
	PUMP	MOTOR		2.3011			•	_								
14" E5721	T80	326TS-449T	14	14	1-3/4	17-1/2	20-1/8	20-1/8	12-3/4	36-3/4	96-1/2	30	17-1/2	45	47-1/2	14-3/8
16" E5721	T80	365TS-449T	16	16	2	20	23	23	14-1/2	68-1/2	108-1/2	33-1/4	22-3/8	45	53-1/4	16
18" E5721	T80	365TS-449T	18	18	2-1/2	22-1/2	24	24	16-3/8	70-1/8	108-1/2	35-1/4	22-3/8	45	57-3/4	17

NOTES:

All flanges are 125# ANSI drilling unless noted.

Bases are designed to be completely filled with grout.

Dimensions reflect usable shaft length.

For discharge positions other than #1 or #9 refer to factory for dimensions.

Not for construction, installation, or application purposes unless certified.

Dimensions shown may vary due to normal manufacturing tolerances.

3601 Fairbanks Avenue | Kansas City, KS 66106 | United States | 1.800.648.PUMP (7867) | pentair.com/fairbanks-nijhuis

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.