



**Zinc**

# Sump Pump

**High-Output Performance**

**Corrosion resistant zinc construction**

Dissipates heat quickly and extends motor life

**Uni-body motor housing**

Eliminates leak points and maximizes pump life

**Stainless steel fasteners and hardware**

Superior quality

**Quadra Seal™ technology**

Provides superior motor protection over single seal designs

**Smooth Flow Hydraulics™**

Deliver high performance for demanding applications

**Tethered Float Switch**

Operates in 14" basins or larger




**1/2 HP 6000 GPH**  
FPZT7300

PERFORMANCE (GPH)								FLOAT SWITCH		SOLIDS HANDLING
DISCHARGE HEIGHT ABOVE PUMPING LEVEL	0'	5'	10'	15'	20'	25'	MAX. LIFT	ON	OFF	
<b>FPZT7300</b>	6000	5,100	4,140	2,940	1,380	-	23'	13.5"	4.5"	3/8"

MODEL	WARRANTY	UPC	CARTON DIMENSIONS	PALLET QTY.	WEIGHT
<b>FPZT7300</b>	3 YEAR	022315367982	10" x 8" x 13.5"	72	15 LBS.

Includes: 1 1/2" NPT discharge, 8' grounded power cord, piggyback-style switch for automatic or manual operation, detailed owner's manual

Check Valve replacement is recommended

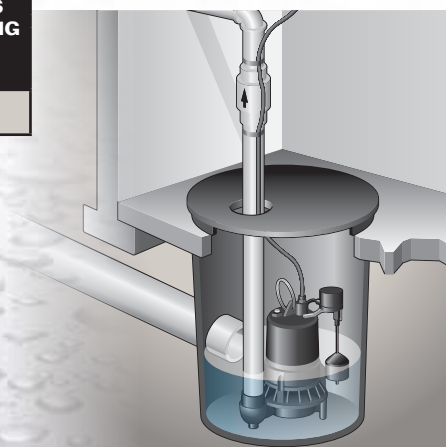

293 Wright Street, Delavan, WI 53115  
For Questions or Installation Instructions:  
[www.flotecwater.com](http://www.flotecwater.com) 1-800-365-6832