

# Flotec®

PROFESSIONAL

E50TLT

## CAST IRON SUMP PUMP

ENERGY-EFFICIENT  
PSC MOTOR


RUGGED  
CONSTRUCTION

TETHERED  
FLOAT SWITCH

EASY INSTALL



### PERFORMANCE CURVE

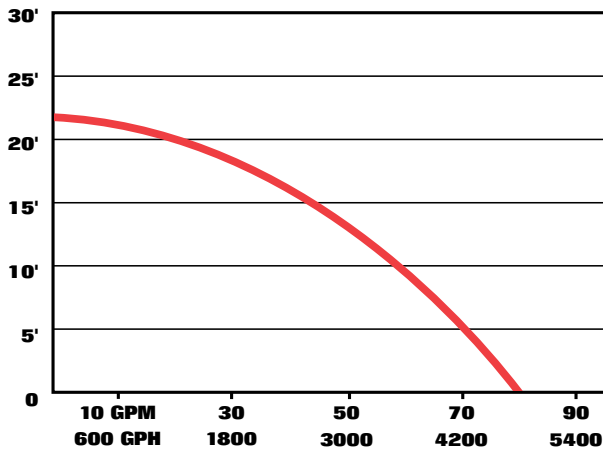

115VAC 1 Phase

10' Power Cord

1.5" FNPT Discharge

For Questions or  
Installation Instructions:  
[www.flotecwater.com](http://www.flotecwater.com)  
1-800-365-6832

UPC	Carton Dimensions	Pallet Qty.	Weight
022315342149	12.13" X 10.13" X 15.38"	36	25.5 Lbs.

### PERFORMANCE

Discharge height above pumping level	0'	5'	10'	15'	20'	Float Switch		Pump Amp	Maximum Lift
	80 4800	72 4320	61 3660	44 2640	17 1020	On 13.5"	Off 4.5"		
Gallons per minute Gallons per hour								6.9	22'

**80 GPM**  
**4,800 GPH**

**5-YEAR  
WARRANTY**

**1/2 HP**