



E75STVT

# CAST IRON SEWAGE PUMP

**ENERGY-EFFICIENT PSC MOTOR**


**RUGGED CONSTRUCTION**

**HANDLES UP TO 2" SOLIDS**

**EASY INSTALL**



## PERFORMANCE CURVE

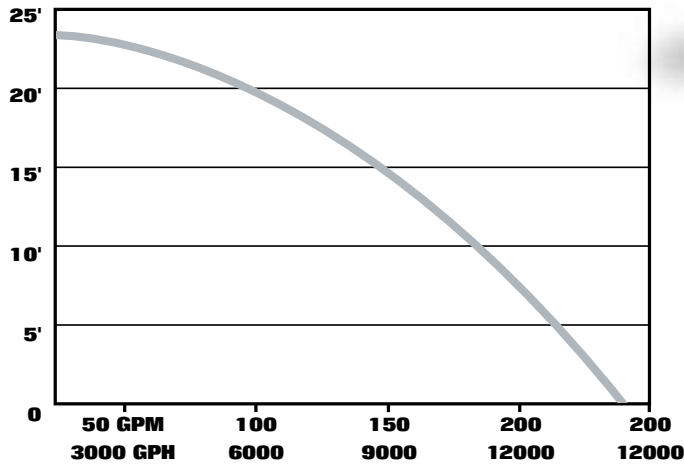

**115VAC 1 Phase**  
**10' Power Cord**  
**2" FNPT Discharge**

For Questions or  
 Installation Instructions:  
[www.flotecwater.com](http://www.flotecwater.com)  
 1-800-365-6832

UPC	Carton Dimensions	Pallet Qty.	Weight
022315342187	11.5" X 9.88" X 16.13"	32	30 Lbs.

## PERFORMANCE

Discharge height above pumping level	0'	5'	10'	15'	20'	Float Switch		Amps	Maximum Lift
	170	153	125	105	40	On	Off		
Gallons per minute	170	153	125	105	40	On	Off	9	24'
Gallons per hour	10,200	9180	7500	6300	2400	16.5"	7.5"		

**170 GPM**  
**10,200 GPH**

**5-YEAR WARRANTY**

**3/4 HP**