



Energy Efficient Design

**Cast Iron/Zinc**

# Sump Pump



**Cast Iron Base**

Provides strength and durability

**Corrosion Resistant Zinc Body**

Dissipates heat quickly and extends motor life

**Energy Efficient Motor**

Saves operating costs

**Stainless Steel Fasteners and Hardware**

Superior quality

**Quadra Seal™ Technology**

Provides superior motor protection over single seal designs

**Smooth Flow Hydraulics™**

Delivers high performance for demanding applications

**Vertical Float Switch**

Operates in 10" basins or larger

**1/2 HP 4700 GPH**  
FPCI5050


**1/3 HP 4200 GPH**  
FPCI3350

PERFORMANCE (GPH)							FLOAT SWITCH		SOLIDS HANDLING
DISCHARGE HEIGHT ABOVE PUMPING LEVEL	0'	5'	10'	15'	20'	MAX. LIFT	ON	OFF	
FPCI5050	4,700	4,200	3,540	2,820	1,800	24'	7.5"	3"	1/4"
FPCI3350	4,200	3,660	3,000	2,160	960	22	7.5"	3"	1/4"

MODEL	WARRANTY	UPC	CARTON DIMENSIONS	PALLET QTY.	WEIGHT
FPCI5050	2 YEAR	022315368439	7.63" x 7.63" x 14.25"	90	14.6 LBS.
FPCI3350	2 YEAR	022315358133	7.63" x 7.63" x 14.25"	90	14.6 LBS

Includes: 1 1/2" NPT discharge, 8' grounded power cord, piggyback-style switch for automatic or manual operation, detailed owner's manual

Check Valve replacement is recommended

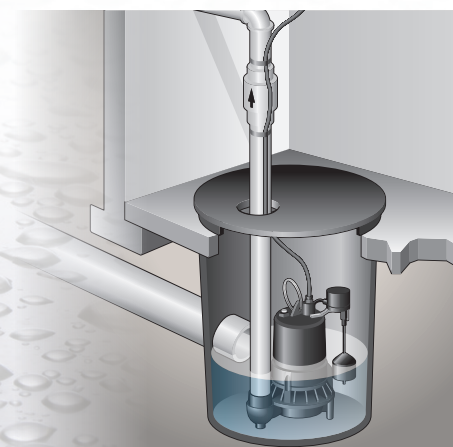

293 Wright Street, Delavan, WI 53115  
For Questions or Installation Instructions:  
[www.flotecwater.com](http://www.flotecwater.com) 1-800-365-6832