HYDROMATIC® HUP SUBMERSIBLE UTILITY PUMP 1/6 HP

Easy to Use Most Anywhere

- Weighs only 7 lb.
- Built-in carrying handle.
- To operate, just attach a standard hose to pump discharge and plug into any 115V outlet.

Removes Standing Water Down to 1/8" Depth

• Short slotted base and vane-type, semi-open impeller assure efficient water removal.

Provides Longer Life Than Similar Size Dewatering Pumps

- P.S.C. motor is air-filled and watercooled for superior heat dissipation.
- Full mechanical shaft seal lasts 10 times longer than lip seals.

Built to Take Rough Handling and Usage

- Full high-impact, corrosion resistant thermoplastic housing provides super-strong resilience.
- Full watertight construction allows total submersion in water while operating.
- Not for continuous duty.






HYDROMATIC® HUP SUBMERSIBLE UTILITY PUMP

Pump Characteristics

Pump/Motor Unit	Motor Unit Utility Pump		
Capacities To	20 GPM	75.71 LPM	
Heads To	22 ft.	6.4 m	
Solids Handling Capacity	1/8 in.	3.18mm	
Liquids Handling	Drain Water	Drain Water	
Intermittent Liquid Temp.	Up to 140°F	Up to 60°C	
Motor	1/6 HP P.S.C.		
Electrical	115V, 2 amps, 1	15V, 2 amps, 1ø, 60 Hz 5-9	
Acceptable ph Range	6-9		
Discharge Hose Adapter	1 in.	25.4 mm	
Turn-On/Turn-Off	Manually Controlled		


Performance Data



Materials of Construction

Part Name	Material
Housing	Thermoplastic
Power Cord	SJTW or SJTW-A, (10 ft.)
Mechanical Seal	Carbon and Ceramic

Dimensional Data

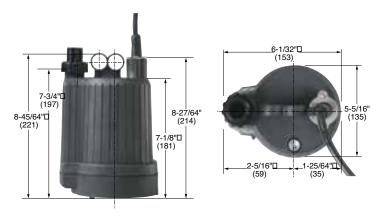

All dimensions in inches. Metric for international use. Component dimensions may vary ± 1/8 inch.Dimensional data not for construction purpose unless certified.Dimensions and weights are approximate. On/Off level adjustable. We reserve the right to make revisions to our product and their specifications without notice.



USA 293 WRIGHT STREET, DELAVAN, WI 53115 WWW.HYDROMATIC.COM PH: 888-957-8677 ORDERS FAX: 800-426-9446 CANADA 269 TRILLIUM DRIVE, KITCHENER, ONTARIO, CANADA N2G 4W5 PH: 519-896-2163 ORDERS FAX: 519-896-6337

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.