



MYERS[®]
MODELS 4R AND 4RX
SOLIDS HANDLING
WASTEWATER PUMPS

STANDARD (4R) AND HAZARDOUS LOCATION (4RX) CONSTRUCTION



MYERS® MODELS 4R AND 4RX

Solids Handling Wastewater Pumps

The Right Choice

The 4R and 4RX (hazardous location) submersible wastewater pumps are the right choice when difficult to pump fibrous or stringy solids are to be expected. The 4R series provides smooth, vibration-free operation when operating at heads higher than peak efficiency. For use in municipal lift stations, treatment plants and industrial waste applications. Myers offers a complete line of wastewater pumps, lift-out rail assemblies, controls and accessories to meet your needs.




Product Capabilities		
Capacities To	600 gpm	37.8 l/s
Heads To	63.5 ft.	19 m
Solids Handling	3 in.	76 mm
Liquids Handling	raw unscreened sewage, fibrous wastewater, effluent, storm water	
Intermittent Liquid Temp.	up to 140°F	up to 60°C
Winding Insulation Temp. (Class F)	311°F	155°C
Available Motors (Single phase motors are capacitor start type. Myers control panels or capacitor kits are required for proper operation and warranty.)	1150 RPM, 1 – 3 HP, 1 Phase, 230V 3 Phase, 208/230/460/575V 1750 RPM, 3 – 5 HP 1 Phase, 230V, 60 Hz 3 – 10 HP, 60 Hz 3 Phase, 208/230/460/575V	
Std. Third Party Approvals Optional Approvals	CSA FM Class 1, Division 1, Group D (4RX only)	
Acceptable pH Range	6 – 9	
Specific Gravity	.9 – 1.1	
Viscosity	28 – 35 SSU	
Discharge, Horizontal Flanged Centerline	4 in. 125 lb. ANSI	101.6 mm

Note: Consult factory for applications outside these recommendations.

Construction Materials	
Motor Housing, Seal Housing, Cord Cap and Volute Case	cast iron, Class 30, ASTM A48
Recessed, Impeller	ductile Iron, Class 65, ASTM A536
Power Cord	S00W, W
Control Cord	S00W
Mechanical Seals Standard	double tandem, type 21 carbon and ceramic
Optional	lower tungsten, carbide
Pump, Motor Shaft	416 SST
Fasteners	300 Series SST

Pump Features and Applications

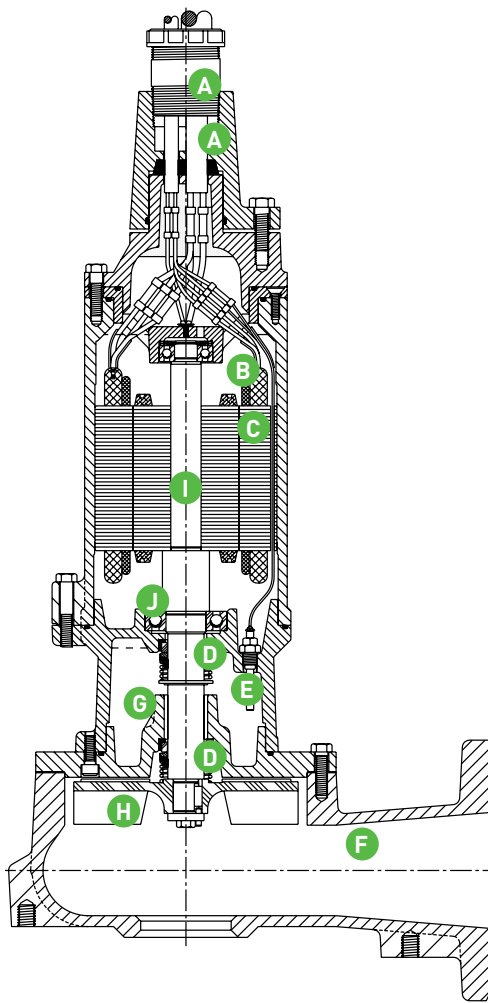

A. Cable Entry System

Provides double seal protection. Cable jacket sealed by compression grommet. Individual wires sealed by epoxy potting.

B. Heat Sensor

Protects motor from burnout due to excessive heat from any overload condition. Automatically resets when motor has cooled.

C. Motor Stator

Heat shrunk into housing for perfect alignment and best heat transfer. Oil-filled motor conducts heat and lubricates bearings.

D. Shaft Seals

Double tandem mechanical shaft seals protect motor. Oil-filled seal chamber provides continuous lubrications.

E. Seal Leak Probes

Detect water in seal housing. Activate warning light in control panel (Test resistor on FM Listed models).

F. Volute Case

Handles 3" solids. Completely open from inlet to discharge. 4" ANSI 125 lb. flange.

G. Sleeve Bearing

Takes radial shock load; provides flame path.

H. Recessed Impeller

Handles stringy trash and slurries without clogging or binding. Pump-out vanes help keep trash from seal; reduce pressure at seal faces.

I. Heavy 416 SST Shaft

Corrosion resistant.

J. Ball Bearings

Upper and lower ball bearings support shaft and rotor and take axial and radial loads.

Passes stringy trash, fibrous wastes, slurries, and other difficult to pump solids that standard enclosed or semiopen impellers cannot.

- Recessed impeller design has completely open passage in volute.
- Pumping action is by vortex; solids can't get caught in impeller.
- Operates without vibration or cavitation over entire performance curve. Operates near shut-off without harming pump.


Durable motor will deliver many years of reliable service.

- Recessed impeller greatly increases bearing life by reducing radial load.
- Oil-filled motor for maximum heat dissipation and constant bearing lubrication.
- Heat sensor thermostats embedded in windings protect motor from overheat conditions.
- Seal leak probes warn of moisture entry; help prevent costly motor burnout.

Available with optional FM approval for use in Class 1, Group D hazardous locations (4RX only).

Performance Data

1150 RPM

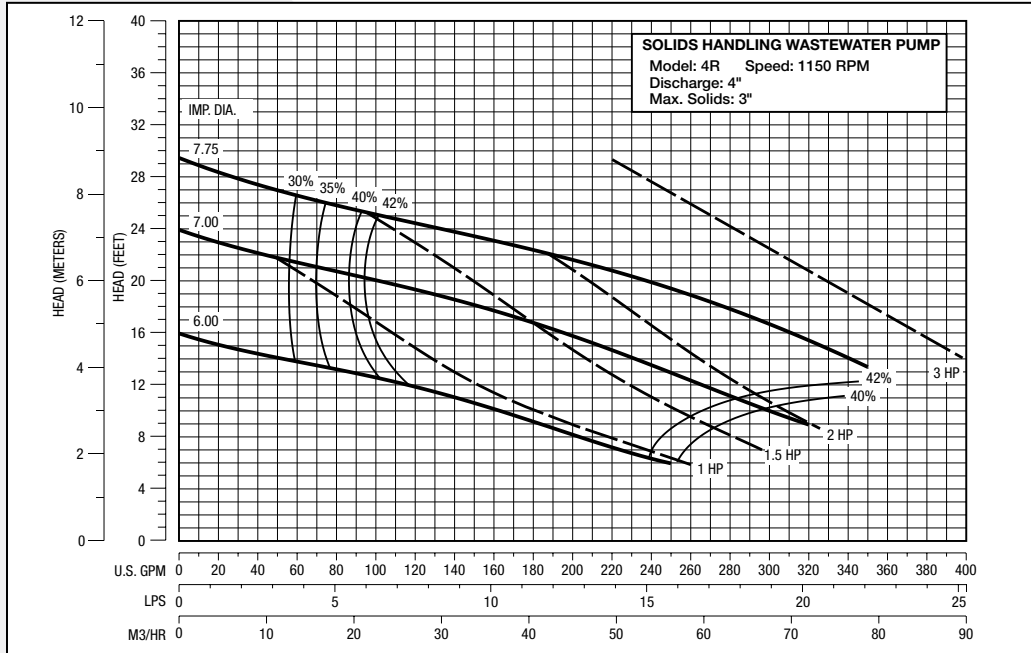


Available Models		Motor Electrical Data											
Standard	Hazardous Location	HP	Volts	Phase	Hertz	Start Amps	Full Load Amps	Service Factor Amps	Full Load kW	Start KVA	Full Load KVA	NEC Code Letter	Service Factor
4R10M6-21	4RX10M6-21	1	230	1	60	47	9	10.8	1.4	10.8	2.1	M	1.2
4R10M6-03	4RX10M6-03	1	208	3	60	30	7.4	8.9	2.3	10.3	2.7	M	1.2
4R10M6-23	4RX10M6-23	1	230	3	60	26	6.4	7.8	2.2	10.3	2.5	M	1.2
4R10M6-43	4RX10M6-43	1	460	3	60	13	3.2	3.9	2.2	9.9	2.5	M	1.2
4R10M6-53	4RX10M6-53	1	575	3	60	10	2.6	3.1	2.3	9.7	2.6	L	1.2
4R15M6-21	4RX15M6-21	1.5	230	1	60	47	11	13.2	1.9	10.8	2.5	J	1.2
4R15M6-03	4RX15M6-03	1.5	208	3	60	30	9.8	11.8	3.1	10.8	3.5	J	1.2
4R15M6-23	4RX15M6-23	1.5	230	3	60	26	8.5	10.2	3.0	10.3	3.4	H	1.2
4R15M6-43	4RX15M6-43	1.5	460	3	60	13	4.2	5.1	3.0	10.3	3.3	H	1.2
4R15M6-53	4RX15M6-53	1.5	575	3	60	10	3.3	4	3.1	9.9	3.3	H	1.2
4R20M6-21	4RX20M6-21	2	230	1	60	71	18	21	3.0	16.3	4.1	K	1.2
4R20M6-03	4RX20M6-03	2	208	3	60	43	12	14.5	3.8	15.5	4.3	J	1.2
4R20M6-23	4RX20M6-23	2	230	3	60	42	10.5	12.6	3.8	16.7	4.4	K	1.2
4R20M6-43	4RX20M6-43	2	460	3	60	21	5.2	6.3	3.8	16.7	4.4	K	1.2
4R20M6-53	4RX20M6-53	2	575	3	60	17	4.2	5	3.8	16.9	4.4	K	1.2
4R30M6-21		3	230	1	60	71	21	21	3.7	16.3	4.8	F	1.0
4R30M6-03		3	208	3	60	43	16.8	16.8	5.3	15.5	6.0	F	1.0
4R30M6-23		3	230	3	60	42	14	14	4.8	16.7	5.6	F	1.0
4R30M6-43		3	460	3	60	21	7	7	4.8	16.7	5.6	F	1.0
4R30M6-53		3	575	3	60	17	5.6	5.6	5.0	16.9	5.6	G	1.0

Motor Efficiencies and Power Factor									
Motor Efficiency %						Power Factor %			
HP	Phase	Service Factor Load	100% Load	75% Load	50% Load	Service Factor Load	100% Load	75% Load	50% Load
1	1	59.5	58	53	44.5	75	72	66	58
1	3	64	61.5	55.5	46	75.5	71	62	48.5
1.5	1	56	59	55	47	80	77	73	67.5
1.5	3	68	67	63.5	56	69.5	66	59.5	50
2	1	61	59	54	45.5	73	68	60	51
2	3	71	69	64	54	71.5	58.5	51	43
3	1	60	60	60	54	78	78	71	60
3	3	73	73	70.5	64	69	69	62	51

Performance Data

1750 RPM

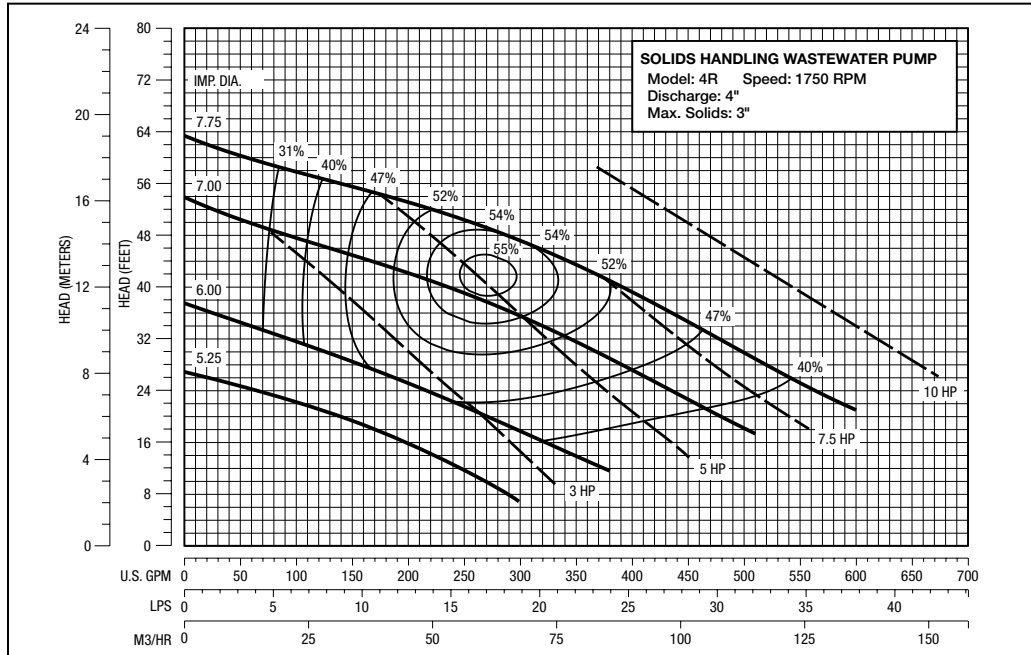


Available Models		Motor Electrical Data										
Standard	Hazardous Location	HP	Volts	Phase	Start Amps	Full Load Amps	Service Factor Amps	Full Load kW	Start KVA	Full Load KVA	NEC Code Letter	Service Factor
4R30M4-21	4RX30M4-21	3	230	1	98	17.5	20.2	3.4	22.5	4.0	J	1.2
4R30M4-03	4RX30M4-03	3	208	3	51	15	17	4.5	18.4	5.6	G	1.2
4R30M4-23	4RX30M4-23	3	230	3	46	13	15.2	4.3	18.3	5.2	G	1.2
4R30M4-43	4RX30M4-43	3	460	3	23	6	7.6	4.3	18.3	5.2	G	1.2
4R30M4-53	4RX30M4-53	3	575	3	19	5	6	4.4	18.9	5.2	H	1.2
4R50M4-21	4RX50M4-21	5	230	1	108	34	44	6.3	24.8	7.8	E	1.2
4R50M4-03	4RX50M4-03	5	208	3	106	21.6	26	6.1	38.1	7.8	J	1.2
4R50M4-23	4RX50M4-23	5	230	3	96	18	21.6	6	38.2	7.2	J	1.2
4R50M4-43	4RX50M4-43	5	460	3	48	9	10.8	6	38.2	7.2	J	1.2
4R50M4-53	4RX50M4-53	5	575	3	39	7.2	8.6	6.1	38.8	7.2	J	1.2
4R75M4-03	4RX75M4-03	7.5	208	3	135	32.2	37	9.3	48.6	11.1	H	1.2
4R75M4-23	4RX75M4-23	7.5	230	3	122	28	33	9.1	48.5	11.1	H	1.2
4R75M4-43	4RX75M4-43	7.5	460	3	61	14	16.5	9.1	48.5	11.1	H	1.2
4R75M4-53	4RX75M4-53	7.5	575	3	49	11.2	13	8.9	48.7	11.1	H	1.2
4R100M4-03		10	208	3	135	38.5	38.5	11.1	48.6	13.9	E	1.0
4R100M4-23		10	230	3	122	32.7	32.7	10.9	48.5	13	E	1.0
4R100M4-43		10	460	3	61	16.3	16.3	10.9	48.5	13	E	1.0
4R100M4-53		10	575	3	49	13.8	13.8	10.7	48.7	13.7	E	1.0

Motor Efficiencies and Power Factor									
Motor Efficiency %						Power Factor %			
HP	Phase	Service Factor Load	100% Load	75% Load	50% Load	Service Factor Load	100% Load	75% Load	50% Load
3	1	69	68	65	57	87	85	81	73
3	3	68	71	71	67	87	88	87	83
5	1	64	69	68	61	86	87	84	75
5	3	76	76	75	70.5	85	82	75	63
7.5	3	75	76	75	71	83	80	71	60
10	3	75	75	76	74	83	83	77	66

Dimensions

[Dimensions in mm]

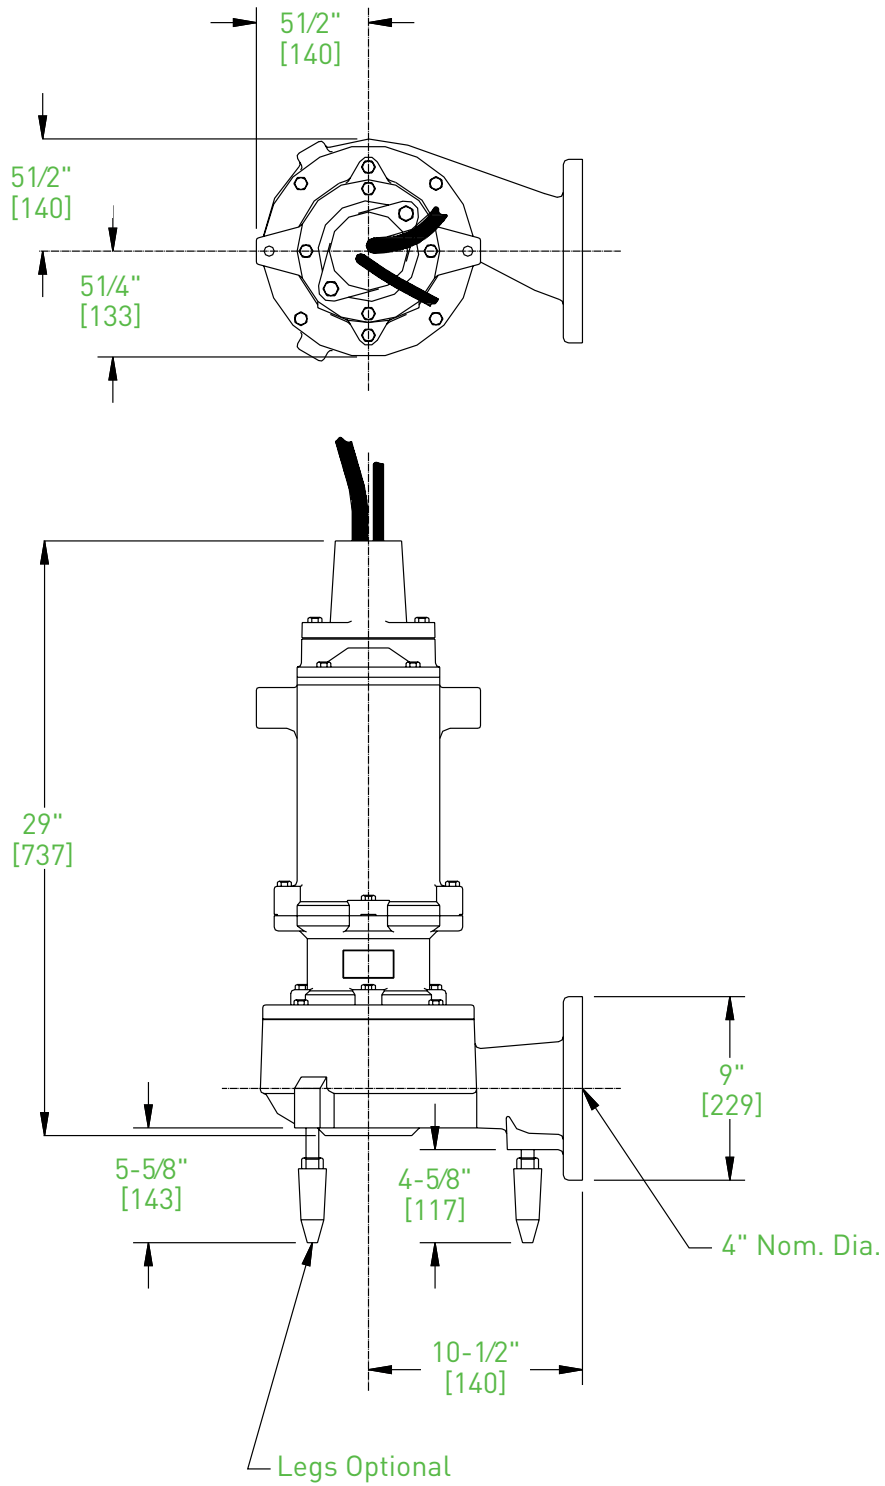

Contact Myers® For All of Your Engineered Wastewater Systems



SOLIDS HANDLING PUMPS



CUSTOM CONTROLS



GRINDER PUMPS



1101 MYERS PARKWAY
ASHLAND, OHIO 44805
PH: 855-274-8947
WWW.FEMYERS.COM

490 PINEBUSH ROAD, UNIT 4
CAMBRIDGE, ONTARIO, CANADA N1T 0A5
PH: 800-363-7867
WWW.FEMYERS.COM

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.
K3373 09/29/17 © 2017 Pentair plc. All Rights Reserved.