



MYERS[®]
SHA SERIES
SUBMERSIBLE GRINDER SYSTEM

MYERS® SHA SERIES

FIBERGLASS BASIN



- A. Available in depths from 4' to 8'
- B. Optional Electrical Junction Box (not shown)
- C. Preassembled Discharge Piping
- D. High Level Alarm Float Switch
- E. Submersible Centrifugal or Semi-Positive Displacement Grinder Pump
- F. Wide Angle Float Switch for Pump Operation

CHOOSE YOUR PUMP

MG SERIES CENTRIFUGAL AUTOMATIC GRINDER PUMP



- Heads to 138 feet and flows of 70 GPM.
- Recessed impeller provides steep non-overloading operating curve and reduces radial bearing loads, increasing bearing life.
- Oil-filled motor for maximum heat dissipation and constant bearing lubrication.
- High torque capacitor starts single phase motor for assured starting under heavy load. No external capacitor needed.
- On-winding current and temperature-sensitive overload.
- Shredding ring and grinder impeller are replaceable without dismantling pump or motor.

MGPD SERIES SEMI-POSITIVE DISPLACEMENT AUTOMATIC GRINDER PUMP



- Heads to 173 feet and flows to 19 GPM.
- Buna-N pump stator for long life
- Oil-filled motor for maximum heat dissipation and constant bearing lubrication.
- High torque capacitor starts single phase motor for assured starting under heavy load. No external capacitor needed.
- On-winding current and temperature-sensitive overload.
- Grinding cutter and shredding ring are replaceable without dismantling pump or motor.


SHA CONTROL PANEL

CONTROL PANEL SPECIFICATIONS	
Overall Dimensions	9.5" x 11.75" x 7.25"
Enclosure	Nema 4X Polycarbonate with Mounting Feet
Alarm Piezo	95 db with "Touch to Silence" circuitry
Flashing LED Alarm Light	
Weight	6 lbs. (2.7 kg)
Zero Crossing Relay Technology	
Nonconductive Injection Molded Sub-Door	
Exterior Pump run and Power Indicators	
cULus 508A Listed	




- A. Hand contact sensor for alarm control
- B. Integral alarm light
- C. Integral alarm buzzer
- D. Robust solid-state circuitry
- E. System diagnostics including pump cycle counter and pump run time counter
- F. Manual pump run button

PUMP PERFORMANCE

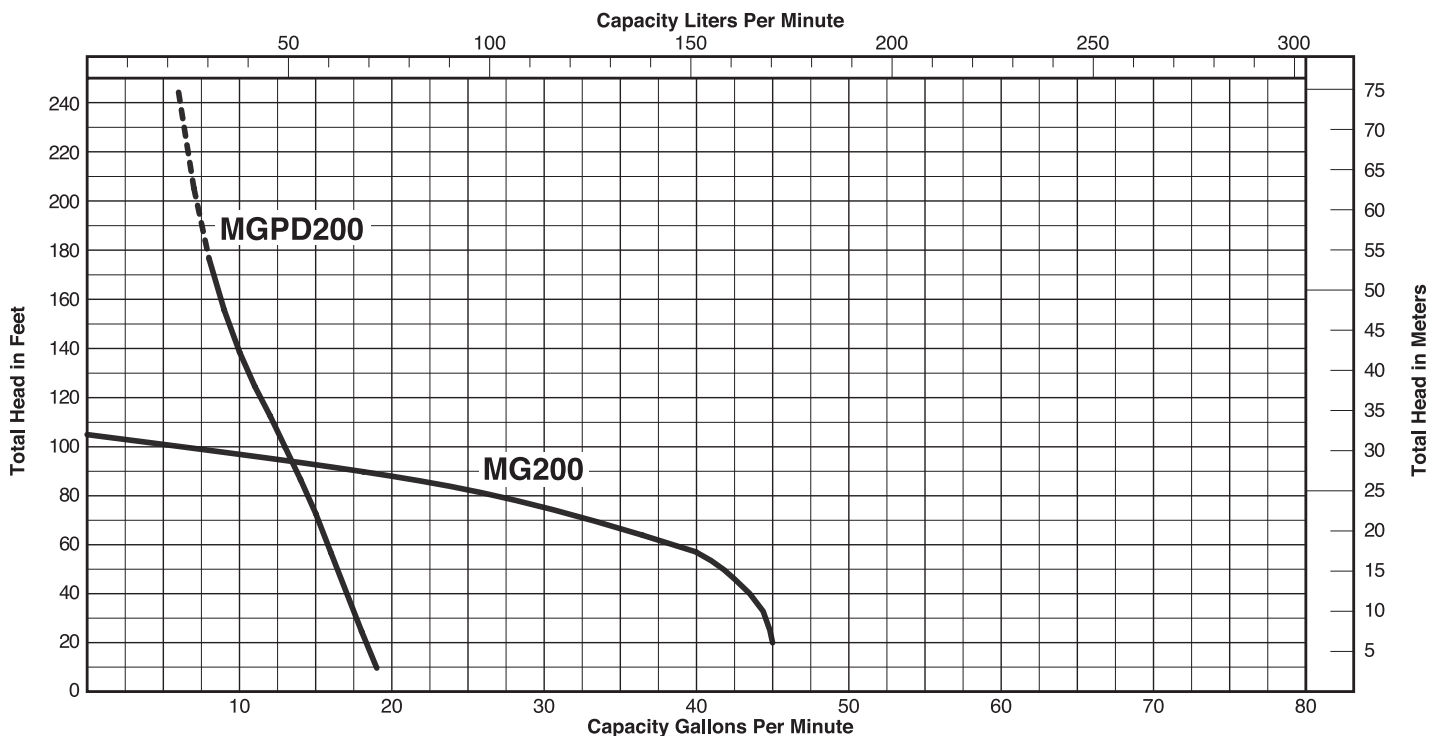


DESIGN FEATURES

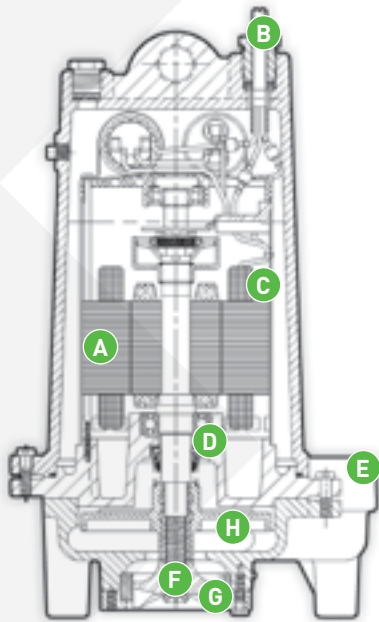

MG SERIES

- A.** Powerful motor 2 hp, 3450 RPM, 230V, 1 phase. High torque oil-filled motor conducts heat and lubricates bearings. Class F VFD/continuous duty rated.
- B.** Cable entry system provides double seal protection. Cable jacket sealed by compression fitting. Individual wires sealed by potting epoxy. Power cord can be replaced without disturbing motor.
- C.** Overload-heat sensor protects motor from burn-out due to excessive heat from any overload condition. Automatically resets when motor has cooled.
- D.** Shaft seal single carbon and ceramic faced seal. Oil lubricated.
- E.** Volute case cast iron, 11/4" vertical, flanged discharge.
- F.** The shaft and all fasteners are made from corrosion resistant stainless steel.
- G.** Grinder impeller and shredding ring are replaceable without dismantling pump. Constructed of 440 SST hardened to 56-60 Rockwell.
- H.** Engineered thermoplastic recessed impeller handles ground slurry without clogging or binding. Provides unobstructed flow passage. Reduces radial loads. pump-out vanes help keep trash from seal, reduces pressure at seal face.

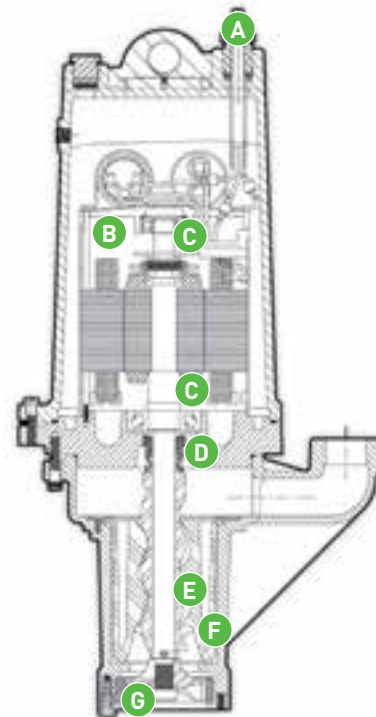

MGPD SERIES

- A.** The water resistant power cord with molded plug is available in 20' (6m) lengths.
- B.** 2 HP oil-filled motor with thermal overload protection.
- C.** The heavy-duty ball bearings, upper (radial) and lower (thrust), are continuously lubricated by oil to ensure long service life.
- D.** The mechanical seal is constructed with a ceramic stationary face and a carbon rotating face and is field proven for long service life.
- E.** 300 Series SST single lobe rotor
- F.** Stator Buna-N double helix stator.
- G.** Grinding cutter design cuts solids to smallest particle size.



740 EAST 9TH STREET,
ASHLAND, OHIO 44805
WWW.FEMYERS.COM

269 TRILLIUM DRIVE, KITCHENER,
ONTARIO, CANADA N2G 4W5
WWW.FEMYERS.COM

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.
K4477 02/01/13 © 2013 Pentair Ltd. All Rights Reserved.