

SELF-PRIMING CENTRIFUGAL PUMPQUICK PRIME SERIES

The Quick Prime Self-Priming Centrifugal Pump is designed for demanding jobs where a lot of water is required over a long period of time such as lawn and garden sprinkling, car washing, or other big cleaning/maintenance jobs, it's built for one purpose only – continuous high performance service. Not for use with corrosive chemicals or flammable liquids.

APPLICATIONS

Lawn and gardening sprinkling, car washing, big cleaning/maintenance jobs, sump drainage, water transfer, or flood control water removal.



FEATURES

- Ruggedly Built: Meets the demands of long, hard continuous service without overloading the motor.
- Manufactured to precise performance specifications.
- Impellers: Corrosion resistant for long life.
- **Simply Design:** Powerful, efficient operation and easy servicing.

SPECIFICATIONS

- High tensile gray iron pump case and motor bracket
- Square rubber sealing rings
- Proven thermoset diffuser
- Engineered composite impeller
- ◆ Carbon/ceramic shaft seal

ORDERING INFORMATION

CATALOG#			PIPE SIZES		MAX TOTAL SHUT-OFF HD.		1& 3Ø APPROX. WT. LBS	
1PHASE	3 PHASE	HP	SUCTION	DISCHARGE	FEET	PSI		
QP7	QP7-3	3/4	1-1/2"	1-1/2"	105	45.5	58	
QP10	QP10-3	1	1-1/2"	1-1/2"	108	47	61	
QP15	QP15-3	1-1/2	1-1/2"	1-1/2"	111	48	68	
QP20	QP20-3	2	1-1/2"	1-1/2"	116	50	74	
QP30	QP30-3	3	1-1/2"	1-1/2"	121	52	87	


HYDROMATIC SUBMERSIBLE SOLIDS HANDLING PUMPS

PERFORMANCE DATA

CATALOG#		lib.	DISCHARGE	GPM CAPACITY FOR DISCHARGE PRESSURE & TOTAL SUCTION LIFT INDICATED				
1PHASE	3 PHASE	HP	PRESSURE PSI	10 FT	15 FT	20 FT	25 FT	
0P7	QP7-3	3/4	20	40.75	38.1	36.1	33.2	
			25	35.75	33.5	30.9	27.5	
			30	30.75	27.25	23.1	18	
			35	21.5	15.1	8.5		
			40	6.5				
QP10	QP10-3	1	20	51.2	48.9	46.4	39.25	
			25	46.2	43.5	40.6	37.4	
			30	40.5	37.5	33.6	29.2	
			35	33	27.6	20.6	10	
			40	19	5			
QP15	QP15-3	1-1/2	20	71.6	69.4	63.4	50.25	
			25	66.5	62.5	58.75	50.25	
			30	59.5	55	50.5	45	
			35	50.5	43.6	37	24.9	
			40	36.8	25.9			
0P20	0P20-3	2	20	78.9	76.6	70.5	55.5	
			25	74.6	71.5	67	55.5	
			30	68.5	63.5	58.4	53	
			35	58.5	52.9	47	40	
			40	47.5	40.5	32.5		
QP30	QP30-3	3	20	93	91	82	64	
			25	92.9	91	82	64	
			30	89.8	85.5	78.6	64	
			35	81	73.3	65.6	57	
			40	67.9	59.1	48.5	37.5	
			45	47.9	30			


M9136WS (12-15-22)


PERFORMANCE DATA

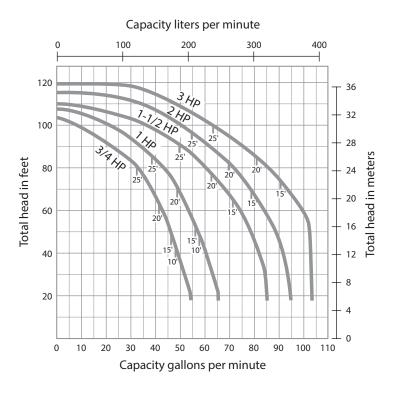

DIMENSIONAL DATA

Measurements in inches for estimating purposes only.





CATALOG#	Α		
QP7	16.75		
QP10	16.75		
QP15	18.625		
QP20	18.625		
QP30	21.625		



1101 Myers Parkway Ashland, OH 44805 Ph: 855.274.8947 Fx: 800.426.9446 490 Pinebush Rd., Unit 4 Cambridge, Ontario N1T 0A5, Canada Ph: 800.363.7867 Fx: 888.606.5484 pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

©2022 Pentair. All Rights Reserved. M9136WS (12-15-22)