MYERS® ABOVE GROUND VFD CONSTANT PRESSURE SYSTEMS



SYSTEM FEATURES/BENEFITS:

- ▶ For use as a booster system for domestic or light commercial applications
- ▶ PENTEK INTELLIDRIVE™ changes pump speed to maintain constant pressure
- Can be used with a smaller supply tank
- Uses single-phase input to power three-phase pumps.

NOTE: For above ground applications, ensure distance between motor and PENTEK INTELLIDRIVE is 25 feet or less.



1 PENTEK INTELLIDRIVE

- ▶ Water pressure management system that maintains constant pressure output regardless of fluctuating demand
- Extends life of pump and motor
- ▶ Keypad with LCD display; real time status indicator; local pump control

2 CT SERIES CENTRIFUGAL PUMP SELECTION

- ▶ 1/2 to 2-1/2 HP High head and medium head models, with heavy duty motor, easy service design and four-position discharge
- ▶ Easy serviceability
- ▶ Drain port for easy winterizing



MYERS[®]


ABOVE GROUND VFD CONSTANT PRESSURE SYSTEMS

Selection Chart

PSI BOOST	2-10 GPM	20 GPM	30 GPM	40 GPM	50 GPM	60 GPM	70 GPM	80 GPM
20	1	1	2		4	4	5	
25	1	1	2		4	5	5	
30	1	2			4	5		-
35	2	2		4	5	6	-	-
40	2		4	4	6	-	-	-
45	3		4	5		-	-	-
50	-	4	5		-	-	-	-
55	-		6	-	-	-	-	-
60	-	-	-	-	-	-	-	-

	MODEL	НР	SUCTION	DISCHARGE	RECOMMENDED DRIVE
1	CT053	1/2HP	1-1/4"	1"	PID10
2	CT073	3/4HP	1-1/4"	1"	PID10
3	CT103	1HP	1-1/4"		PID10
4	CT153	1-1/2HP	1-1/4"	1"	PID20
5	CT203	2HP	1-1/2"	1-1/4"	PID20
	CT253	2-1/2HP		1-1/2"	PID50

Suggested Installation for Above Ground or Submersible Pump Systems

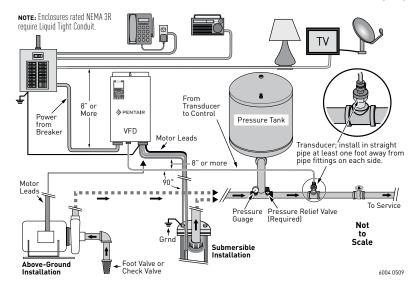



USA

293 WRIGHT STREET, DELAVAN, WI 53115 WWW.FEMYERS.COM PH: 888-987-8677 ORDERS FAX: 800-426-9446

CANADA

269 TRILLIUM DRIVE, KITCHENER, ONTARIO, CANADA N2G 4W5 PH: 519-748-5470 ORDERS FAX: 888-606-5484

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.

© 2012 Pentair Ltd. All Rights Reserved. MY10451WS [12/05/12]