

MYERS® C35-20 HIGH PRESSURE RECIPROCATING PISTON PUMP



Over a century of experience has proven that the Pentair's Myers line of reciprocating pumps are designed and built with performance you can rely on. Our C35 high pressure reciprocating pump combines manufacturing expertise and application understanding for a pump that is perfect for a variety of high pressure jobs. For details, contact your Pentair sales representative, or customer service at 419-289-1144.

ADVANTAGES BY DESIGN

HANDLES WIDE RANGE OF DEMANDING INDUSTRIAL APPLICATIONS.

- High-strength fluid end and spring-loaded Hat valves for high pressure pumping (up to 2,000 PSI) of large water volumes.
- Pumps liquids to 180°F in mine, mill, food processing, car wash, sewer cleaner and other applications.

PRODUCT CAPABILITIES, SPECIFICATIONS

| Catalog Number | Max. Rated Capacity GPM (LPM) | Max. Rated Pressure PSI (Bar) | Temp. Rating °F (°C) | Size in inches (mm) | | | | | | Approx. Wgt. Lbs. (kg) |
|----------------|-------------------------------|-------------------------------|----------------------|---------------------|---------------|------------------|--------------------|---------------|---------------------------|------------------------|
| | | | | Cylinder Bore | Piston Stroke | Suction Size NPT | Discharge Size NPT | Input Shaft | Keyway | |
| C35-20 Triplex | 35 (132.49) | 2000 (138) | 180 (82) | 1 3/4 (44.45) | 1 3/4 (44.45) | 1 1/2 (38.1) | 1 (25.4) | 1 3/8 (34.93) | 5/16 x 5/32 (7.94 x 3.97) | 230 (104.2) |

HORSEPOWER PERFORMANCE DATA

| Flow Cap. GPM | RPM | Horsepower Required For: | | | | | | | |
|---------------|-----|--------------------------|---------|----------|----------|----------|----------|----------|----------|
| | | 600 PSI | 800 PSI | 1000 PSI | 1200 PSI | 1400 PSI | 1600 PSI | 1800 PSI | 2000 PSI |
| 19.5 | 375 | 8.0 | 10.7 | 13.4 | 16.1 | 18.7 | 21.4 | 24.1 | 26.8 |
| 24.6 | 475 | 10.1 | 13.5 | 16.9 | 20.3 | 23.6 | 27.0 | 30.4 | 33.8 |
| 29.8 | 575 | 12.3 | 16.4 | 20.5 | 24.5 | 28.6 | 32.7 | 36.8 | 40.9 |
| 35.0 | 675 | 14.4 | 19.2 | 24.0 | 28.8 | 33.6 | 38.4 | 43.2 | 48.0 |

KILOWATT PERFORMANCE DATA


| Flow Capacity LPM | RPM | Kilowatts Required For: | | | | | | | |
|-------------------|-----|-------------------------|--------|--------|--------|--------|---------|---------|---------|
| | | 41 BAR | 55 BAR | 69 BAR | 83 BAR | 96 BAR | 110 BAR | 124 BAR | 138 BAR |
| 73.8 | 375 | 6.0 | 8.0 | 10.0 | 12.0 | 13.9 | 16.0 | 18.0 | 20.0 |
| 93.1 | 475 | 7.5 | 10.1 | 12.6 | 15.1 | 17.6 | 20.1 | 22.7 | 25.2 |
| 112.8 | 575 | 9.2 | 12.2 | 15.3 | 18.3 | 21.3 | 24.4 | 27.4 | 30.5 |
| 132.5 | 675 | 10.7 | 14.3 | 17.9 | 21.5 | 25.1 | 28.6 | 32.2 | 35.8 |

- Horsepower required is based upon 85% overall efficiency.
- Formula: (1) HP required = $\frac{\text{GPM} \times \text{PSI}}{1457}$ or KW = $\frac{\text{LPM} \times \text{BAR}}{511}$ (electric brake)
 (2) Expected GPM = $\frac{\text{Rated GPM} \times \text{Working RPM}}{\text{Rated RPM}}$
 Expected LPM = $\frac{\text{Rated LPM} \times \text{Working RPM}}{\text{Rated RPM}}$
 Motor shieve O.D. size = $\frac{\text{Pump shieve O.D. size} \times \text{Pump RPM}}{\text{Motor RPM}}$


NOTE: Horsepower requirements for an internal combustion engine (gas or diesel) may be obtained by multiplying the figures listed by 1.3. Do not exceed 80% of the manufacturer's advertised horsepower at operating RPM.

FLUID END

POWER END

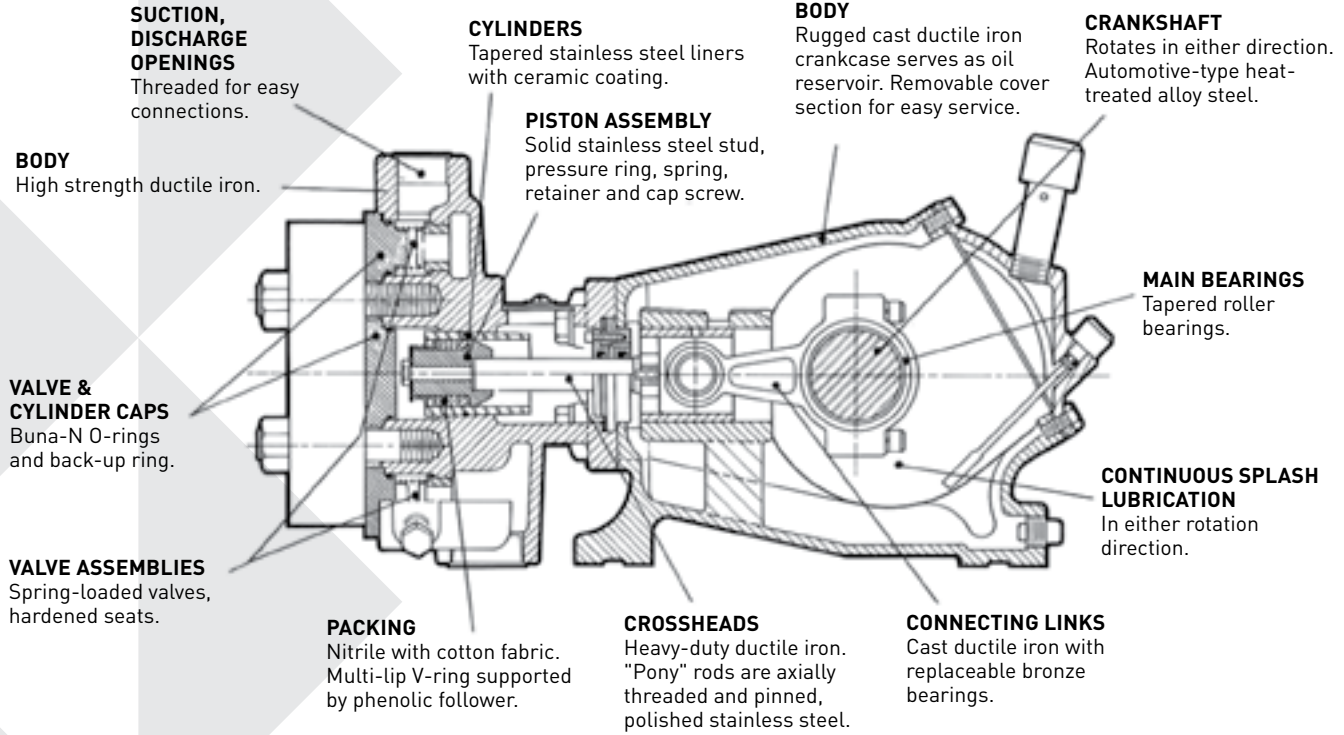

DIMENSIONS

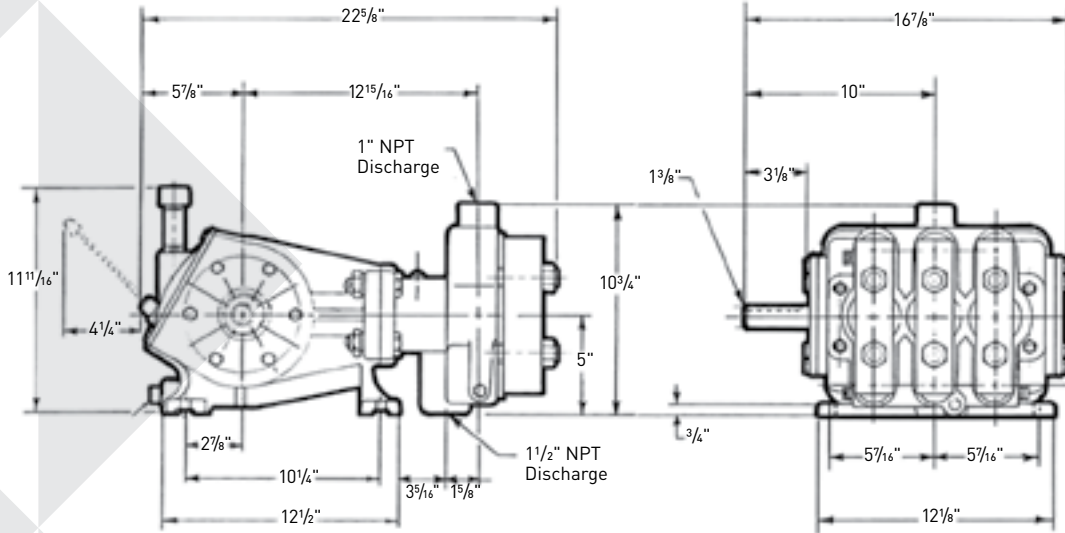

740 EAST 9TH STREET,
ASHLAND, OHIO 44805
WWW.FEMYERS.COM

490 PINEBUSH ROAD, UNIT 4,
CAMBRIDGE, ONTARIO N1T 0A5
WWW.FEMYERS.COM

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.
K3241 01/08/14 © 2014 Pentair. All Rights Reserved.