




AUTOMATIC SUBMERSIBLE SEWAGE PUMP



MODEL 2961 4/10 HP

- Capable of handling 2" solids – ideal for basement installation, pumping below-grade toilets, laundry facilities and general dewatering
- Durable corrosion-resistant thermoplastic construction maximizes pump life
- Energy-efficient motor with overload protection provides safe operation
- Maximum pumping capacity to 5250 gallons per hour
- Includes 8' power cord
- 2" NPT discharge
- Easy installation, requires minimum 18" diameter sewage basin

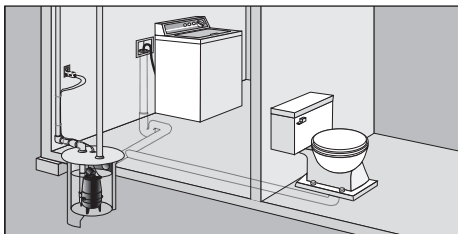

PERFORMANCE

Model	HP	Warranty	Switch Type	Min. Sump Diameter	Discharge Height Above Pumping Level (GPH)				Max. Lift
					0	5'	10'	15'	
2961	4/10	1-year	Tethered	18"	5250	3900	2550	960	18'

ORDERING INFORMATION

Model	UPC	Carton (L x W x H)	Cube	Pallet Qty.	Weight
2961	0 17561 91157 7	10.25" x 7.25" x 16.50"	.710	50	12.85 lbs.