




# 3-WIRE 4" SUBMERSIBLE WELL PUMPS



- MODEL 2865G      1 HP 20 GPM**
- MODEL 2880G      1 HP 10 GPM**
- MODEL 2873G    3/4 HP 10 GPM**
- MODEL 2870G    1/2 HP 10 GPM**

- High capacity heavy duty design. High-impact discharge head and base. Strong stainless-steel shell on pump end and motor
- 10 GPM rated models for maximum efficiency in most homes
- 20 GPM-rated model. Perfect for ranches and irrigation
- 1-1/4" corrosion-resistant thermoplastic discharge head outlives conventional metals even in the harshest environments
- Built-in check valve to prevent back flow
- High-efficiency motor for fewer energy dollars
- NEMA-standard motor
- Complete installation instructions included
- All units are built with a green ground wire per National Electric Code specifications for ground protection
- Fits inside any 4" opening
- 3-wire pumps must be used with the correct control box. Use of other manufacturer's control box can shorten life of pump and will void the warranty

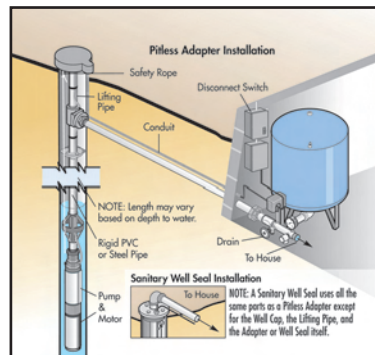

### PERFORMANCE

Model	HP	Warranty	GPM	Voltage	GPM Pumped at Different Depths to Water*									
					20'	40'	60'	80'	100'	150'	200'	250'	300'	
<b>2865G</b>	1	3-year	20	230	26.7	24.9	23	21.2	18.7	6.5	—	—	—	
<b>2880G</b>	1	3-year	10	230	15.8	15.4	14.7	14	13.4	11.7	9.7	7.3	4.4	
<b>2873G</b>	3/4	3-year	10	230	14.8	14.2	13.4	12.6	11.7	8.8	5.2	—	—	
<b>2870G</b>	1/2	3-year	10	230	14.3	13.2	12.2	10.9	9.6	5	—	—	—	

\*All performances shown in gallons per minute at 40 PSI (pound per square inch) discharge pressure at top of well.

### ORDERING INFORMATION

Model	UPC	Carton (L x W x H)	Cube	Pallet Qty.	Weight
<b>2865G</b>	0 22315 31275 3	40.5" x 5.75" x 4.75"	.38	28	30 lbs.
<b>2880G</b>	0 22315 31274 6	40.5" x 5.75" x 4.75"	.38	28	26 lbs.
<b>2873G</b>	0 22315 31272 2	40.5" x 5.75" x 4.75"	.38	28	27 lbs.
<b>2870G</b>	0 22315 31270 8	40.5" x 5.75" x 4.75"	.38	28	29.2 lbs.