




3-WIRE 4" SUBMERSIBLE WELL PUMPS



- MODEL 2865G 1 HP 20 GPM**
- MODEL 2880G 1 HP 10 GPM**
- MODEL 2873G 3/4 HP 10 GPM**
- MODEL 2870G 1/2 HP 10 GPM**

- High capacity heavy duty design. High-impact discharge head and base. Strong stainless-steel shell on pump end and motor
- 10 GPM rated models for maximum efficiency in most homes
- 20 GPM-rated model. Perfect for ranches and irrigation
- 1-1/4" corrosion-resistant thermoplastic discharge head outlives conventional metals even in the harshest environments
- Built-in check valve to prevent back flow
- High-efficiency motor for fewer energy dollars
- NEMA-standard motor
- Complete installation instructions included
- All units are built with a green ground wire per National Electric Code specifications for ground protection
- Fits inside any 4" opening
- 3-wire pumps must be used with the correct control box. Use of other manufacturer's control box can shorten life of pump and will void the warranty

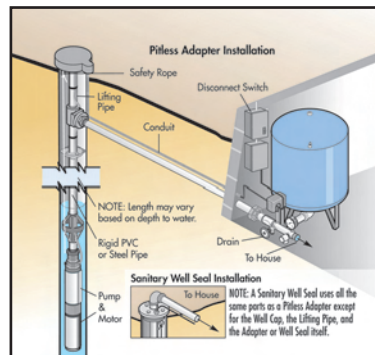

PERFORMANCE

Model	HP	Warranty	GPM	Voltage	GPM Pumped at Different Depths to Water*									
					20'	40'	60'	80'	100'	150'	200'	250'	300'	
2865G	1	3-year	20	230	26.7	24.9	23	21.2	18.7	6.5	—	—	—	
2880G	1	3-year	10	230	15.8	15.4	14.7	14	13.4	11.7	9.7	7.3	4.4	
2873G	3/4	3-year	10	230	14.8	14.2	13.4	12.6	11.7	8.8	5.2	—	—	
2870G	1/2	3-year	10	230	14.3	13.2	12.2	10.9	9.6	5	—	—	—	

*All performances shown in gallons per minute at 40 PSI (pound per square inch) discharge pressure at top of well.

ORDERING INFORMATION

Model	UPC	Carton (L x W x H)	Cube	Pallet Qty.	Weight
2865G	0 22315 31275 3	40.5" x 5.75" x 4.75"	.38	28	30 lbs.
2880G	0 22315 31274 6	40.5" x 5.75" x 4.75"	.38	28	26 lbs.
2873G	0 22315 31272 2	40.5" x 5.75" x 4.75"	.38	28	27 lbs.
2870G	0 22315 31270 8	40.5" x 5.75" x 4.75"	.38	28	29.2 lbs.