


### Reusing NetComm 4G Modems During Dispenser Replacement

To improve efficiency, we are testing a process to reuse the NetComm 4G modems when a dispenser is replaced. If you are instructed to order CCP# [1146523](#) (Modem Enclosure Kit) in preparation for a dispenser replacement work order, please complete the following procedure:

1. Order CCP# [1146523](#) (Modem Enclosure Kit) and bring it to the install.
2. Remove the NetComm modem, power cord, and ethernet cable from the old dispenser.
3. Open the Enclosure Kit (CCP# [1146523](#)) and remove the (2) supplied screws and (2) SMA elbow adapters.
4. The (2) screws should be used to attach the NetComm modem to the modem enclosure base through the raised bosses.



5. The (2) SMA adapters are used to fold the antennas back over the modem, so they fit inside the modem enclosure when closed. Connect the adapters and antennas to cellular MAIN and AUX.
6. The power and ethernet cables should be wound through the side gaskets in an "S" pattern to prevent accidental pull-out.
7. During new dispenser install, follow [Netcomm Install Guide for Freestyle v4.4 \(LINK\)](#) for modem placement, mounting, connections, startup, and fOS connectivity/enrollment instructions.

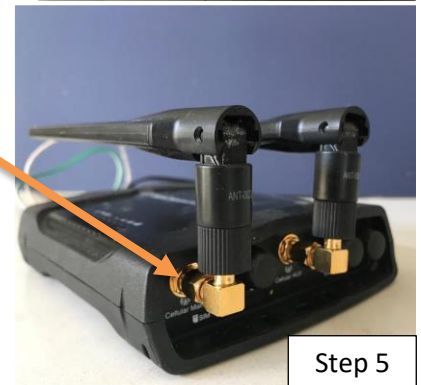

**If you encounter issues with hardware, software, or connectivity, Coca-Cola Freestyle assistance is available 24 hours a day, 7 days a week at 800-817-2653.**